



GPU COMPUTING SYSTEM

# VCO-6131E-4M2

Superior AI Edge Computing System with LGA-1151 socket for Intel® CFL-R S Processor



## FEATURES

- Support 8<sup>th</sup> / 9<sup>th</sup> Gen. Intel® CFL-R S Processor (LGA 1151, 65W/35W TDP)
- Intel® Q370 chipset
- 2x DDR4 2400/2666Hz SODIMM. Max. up to 64GB
- Triple Independent Display by 1x DVI-I and 2x DisplayPort
- 2x Intel® GbE supporting Wake-on-LAN and PXE
- 2x Full-size mini PCIe (shared by 1x mSATA), 1x PCIe x16, and 4x M.2 (NVMe PCIe x2), 2x SIM socket
- 4x 2.5" SATA HDD bay with RAID 0, 1, 5, 10 support, 1x mSATA (shared by 1x Mini PCIe)
- 1x M.2 (M Key, PCIe x4, 2280, Support NVMe), 1x M.2 (E Key, PCIe x2, 2230, USB 2.0, Support CNVi)
- 6x RS-232/422/485 (4x internal)
- 4x USB 3.2 Gen 2 (10 Gbps), 5x USB 3.2 Gen 1 (5 Gbps, internal), 1x USB 3.0 header (internal)
- 8x DI + 8x DO with isolation
- 9 to 48VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature (-25°C to 60°C)
- TPM 2.0 Supported

## SPECIFICATIONS

### System

Processor	Support 8 <sup>th</sup> /9 <sup>th</sup> Gen Intel® CFL-R S Processor (LGA 1151, 65W/35W TDP)
	- Intel® Core™ i7-9700E, 8 Cores, 12MB cache, up to 4.4 GHz
	- Intel® Core™ i5-9500E, 6 Cores, 9MB Cache, up to 4.2 GHz
	- Intel® Core™ i3-9100E, 4 Core, 6MB Cache, 3.7 GHz
	- Intel® Core™ i7-9700T, 8 Cores, 12MB cache, up to 3.8 GHz
	- Intel® Core™ i5-9500T, 6 Cores, 9MB Cache, up to 3.6 GHz
	- Intel® Core™ i3-9100T, 4 Core, 6MB Cache, 3.2 GHz
	- Intel® Core™ i7-8700T, 6 Cores, 12MB cache, up to 4.0 GHz
	- Intel® Core™ i5-8500T, 6 Cores, 9MB Cache, up to 3.5 GHz
	- Intel® Core™ i3-8100T, 4 Cores, 6MB Cache, 3.1 GHz
	- Intel® Pentium® G5400T, 2 Cores, 4MB Cache, up to 3.1 GHz
	- Intel® Celeron® G4900T, 2 Cores, 2MB Cache, up to 2.9 GHz

System Chipset	Intel® Q370 Express Chipset
LAN Chipset	GbE1: Intel® I219LM (Support Wake-on-LAN and PXE) GbE2: Intel® I210-AT (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC888S
System Memory	2x 260-Pin DDR4 2400/2666MHz SODIMM. Max. up to 64GB (Un-buffered and Non-ECC)
BIOS	AMI 256Mbit SPI BIOS
Watchdog	Software Programmable Supports 1-255 sec. System Reset
TPM	TPM 2.0

### Display

VGA	Yes (by optional split cable)
DVI	1x DVI-I, support resolution 1920 x 1200
DisplayPort	2x DisplayPort, support resolution 4096 x 2304
Multiple Display	Triple Display

### Storage

SSD/HDD	2x Internal 2.5" SATA HDD Bay (support H=9mm) 2x Removable 2.5" SATA HDD Bay (support H=9mm, hot-swappable) Support RAID 0, 1, 5, 10
mSATA	1x mSATA (Shared by 1x Mini PCI Express)
M.2	1x M.2 (M Key, PCIe x4, 2280, Support NVMe), 1x M.2 (E Key, PCIe x2, 2230, USB 2.0, Support CNVi)
NVMe	4x M.2 PCIe x2, 2280 (hot-swappable)
SIM Socket	2x Internal SIM socket
<b>Expansion</b>	
Mini PCI Express	2x Full-size Mini PCIe (1x shared by 1x mSATA)
PCI Express	1x PCIe x4 (1-lane) 1x PCIe x16 (8-lane) for GPU card 1x Slimline (8-lane) for 4x M.2 PCIe x2
Card Dimension	312mm(L) x 112mm(H)

### I/O

COM	2x RS-232/422/485 2x RS-232/422/485 (internal)
USB	4x USB 3.2 Gen 2 (10 Gbps), 5x USB 3.2 Gen 1 (5 Gbps, internal), 1x USB 3.0 header (internal)
LAN	2x RJ45
DIO	8 in / 8 out (Isolated)
Universal I/O Bracket	2x Universal I/O Bracket (By mini PCIe interface)
Others	4x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off 1x PC/Car Mode Switch, 1x Delay Time Switch 1x Removable CMOS Battery (internal)

### Operating System

Windows	Windows 10
Linux	Linux kernel 5.X

### Power

Power Mode	AT, ATX
Power Supply Voltage	9-48VDC
Power Ignition Sensing	Power Ignition Management
Power Connector	3-pin Terminal Block ; 4-pin Terminal Block
Power Adaptor	Optional AC/DC 24V, 220W/280W Optional AC/DC 24V, 280W for GPU
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse proteceion

### Environment

Operating Temp.	-25°C to 60°C (65W / 35W CPU)
Storage Temp.	-30°C to 85°C
Relative Humidity	10% to 95% (non-condensing)
Vibration	With SSD: 3 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 20G, half sine, 11ms
Standards / Certification	CE, FCC Class A

### Physical

Construction	Extruded Aluminum with Heavy Duty Metal
Dimension	157 (W) x 340 (D) x 240 (H) mm
Weight	9.5 kg
Mounting	Wall Mounting


\* For 8<sup>th</sup>/9<sup>th</sup> CPUs configured to run at 65W, operating temperatures will be limited to 60°C.

\*\* 65W CPUs may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 8 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.

\*\*\* All specifications and photos are subject to change without notice.


# VCO-6131E-4M2

## EXTERNAL I/O MECHANICAL LAYOUT

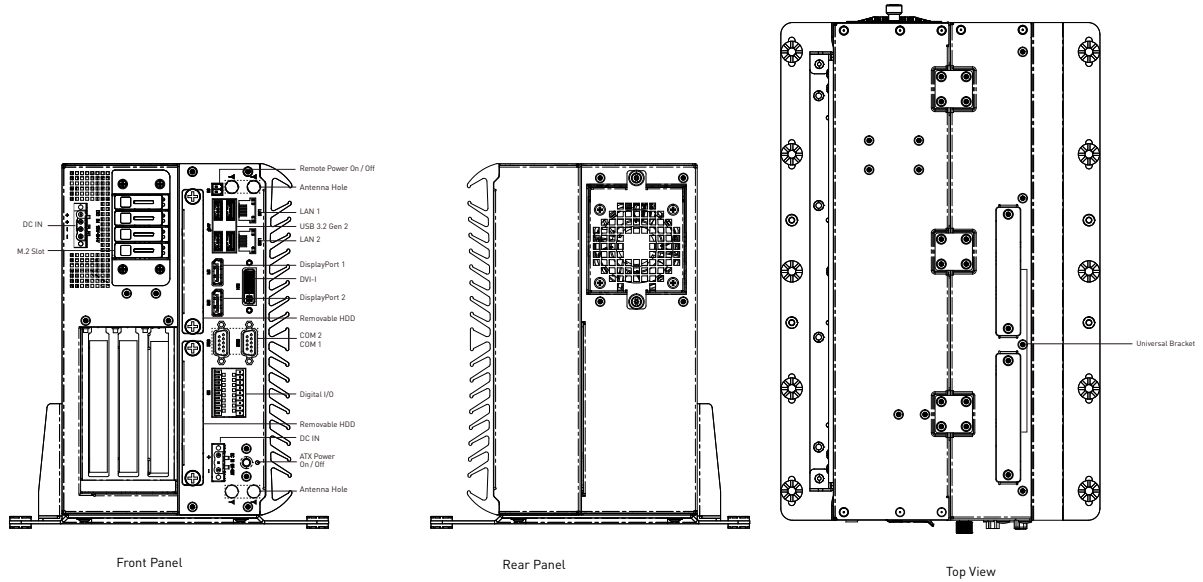

## DIMENSION

Unit: mm

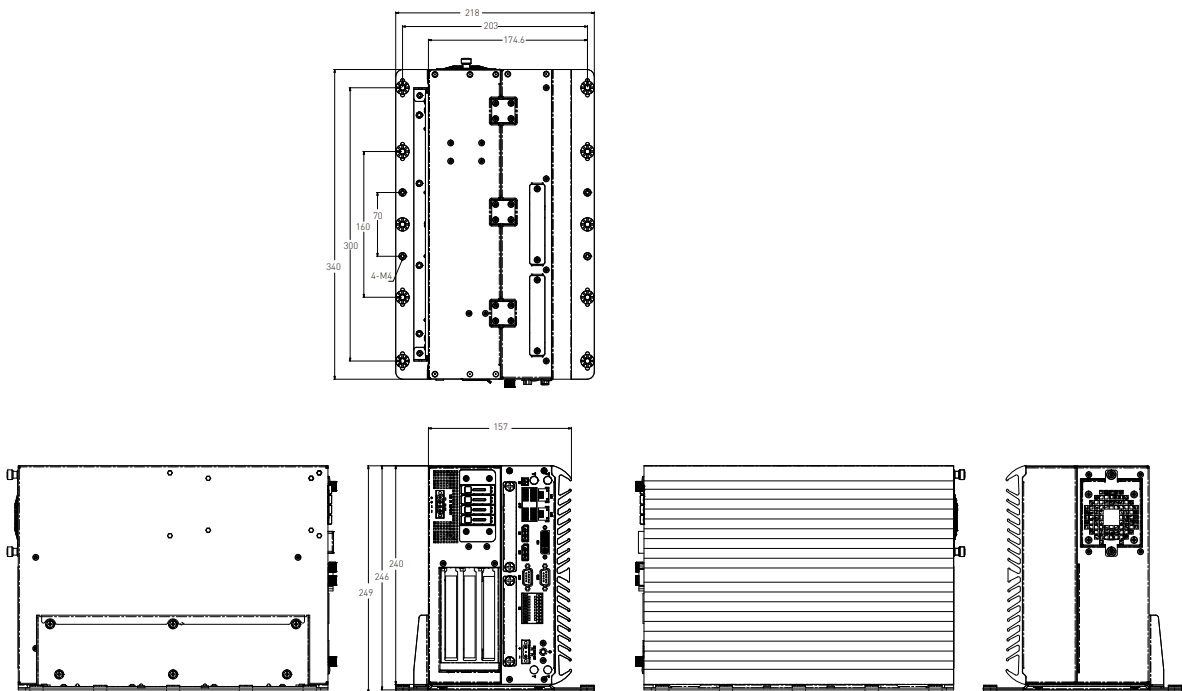



# VCO-6131E-4M2

## ORDERING INFORMATION

MODEL NO.	DESCRIPTION
1-E09A22801	Adapter AC/DC 24V/11.67A 280W with 3-pin Terminal Block Plug 5.0mm Pitch
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3-pin Terminal Block Plug 5.0mm Pitch
1-TPCD00005	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

## PACKING LIST

- 1x VCO-6100 Series Embedded System
- 1x Wall Mount Kit
- 1x Accessory Kit

## AVAILABLE MODELS

MODEL NO.	DESCRIPTION
VCO-6131E-4M2	Superior AI Edge Computing System with LGA-1151 socket for Intel® CFL-R S Processor



### C&T Solution Inc.

17F-2, No. 700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Tel: +886-2-7731-7888 Fax: +886-2-7731-7855

Email: [info@candtsolution.com](mailto:info@candtsolution.com)

[www.candtsolution.com](http://www.candtsolution.com)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660