


Embedded Box PCs

**COMPACT-M Series**

Industrial compact PC with Intel® Atom™ E3800 processor (formerly Bay Trail)

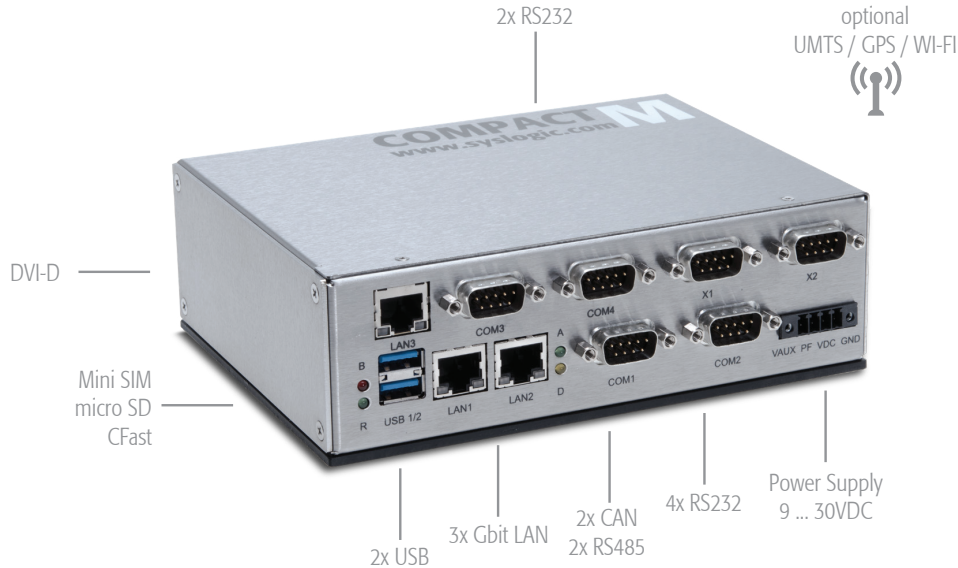

**IPC/COMPACT8**

This fan less COMPACT8-M generation is based on the latest Intel® Atom™ E3800 (formerly Bay Trail) processor technology and offers a wide range of interface options. The robust and uncompromising industrial design allows the implementation in the most demanding applications and guarantees long term availability.

- Multi-core 64-bit Intel® Atom™ processor
- 24/7 continuous operation
- No moving parts, design for mobile use
- Product lifecycle management
- Long term availability



debian



**Product Highlights**

- Hardware Watchdog
- Temperature supervision
- Real time clock
- Persistent Flash BIOS
- Optional goldcap backup
- ESD- protection on all interfaces
- No active cooling required
- Fan less

**Product Feature**

- Intel® Atom™ E3800 Series
- up to 1.91GHz, up to 4 Cores
- RAM soldered on board up to 8GB
- Socket for CFast
- DVI, Ethernet, USB3, RS232, Mini PCIe
- isolated CAN or optional RS422/485
- Stainless steel housing

**Markets / Applications**

- Industrial Automation
- Automated Guided Vehicle (AGV)
- Traffic control
- Transportation and vehicle construction
- Cleantech

	Order Code	IPC/M8H19-A201E	IPC/M8H19-A202E	IPC/M8H19-A203E	MySyslogic <sup>1</sup>
<b>Processor / Performance</b>					
Intel Atom Dual Core E3825 1.33GHz 64-bit		optional	optional	optional	optional
Intel Atom Quad Core E3845 1.91GHz 64-bit		•	•	•	•
<b>Memory</b>					
L2 cache		2MB	2MB	2MB	2MB
DDR3 RAM (soldered)		4GB	4GB	4GB	4GB
8GB DDR3 RAM (soldered) <sup>1</sup>		optional	optional	optional	optional
<b>Features</b>					
Real time clock PC compatible		•	•	•	•
Hardware Watchdog		•	•	•	•
Temperature supervisor		•	•	•	•
Intelligent power management		•	•	•	•
Battery backup		•	•	•	•
Goldcap backup		optional	optional	optional	optional
<b>Communication Interfaces</b>					
DVI-D up to 1920x1200 (WUXGA)		1	1	1	optional
Display port up to 1920x1200 (WUXGA) <sup>1</sup>					optional
micro SD Card socket		1	1	1	1
CFast socket		1	1	1	1
SATA 2.0 interface standard <sup>2</sup>					optional
USB version 3.0 (Type A)		1	1	1	up to 4
USB version 2.0 (Type A)		1	1	1	up to 4
USB version 2.0 <sup>2</sup>		2	2	2	1
Ethernet 10/100/1000 Mbit (I210-IT)		3	3	3	up to 3
RS232 ESD protected (DSUB9)		4	4	6	up to 6
RS232 ESD protected <sup>2</sup>					up to 6
RS422/485 ESD protected, isolated (DSUB9) <sup>3</sup>		1	2		up to 2
CAN (SJA1000 compatible) ESD protected, isolated (DSUB9) <sup>3</sup>		1		2	up to 2
Full size mPCIe socket <sup>2</sup>		1	1	1	1
Mini SIM socket (to mPCIe socket)		•	•	•	•
I2C bus <sup>2</sup>		•	•	•	•
Speaker <sup>2</sup>		•	•	•	•
<b>Technical Data</b>					
Dimensions w170 x h54.5 x d127 mm (housing)		•	•	•	•
Net weight [gram]		~ 1050	~ 1050	~ 1050	~ 1050
Input voltage 9 ... 30VDC non-isolated		•	•	•	•
Input voltage 19 ... 30VDC isolated <sup>1</sup>		optional	optional	optional	optional
Current consumption typ. [mA] @ 24V without Add-Ins		375	375	375	
Power consumption typ. [Watt] @ 24V without Add-Ins		9	9	9	
<b>Environmental Conditions</b>					
Standard operating temperature (ambient) <sup>4</sup>		-40°C ... +65°C	-40°C ... +65°C	-40°C ... +65°C	-40°C ... +70°C
Storage temperature -40 ... +85° C		•	•	•	•
Protection standard: IP40		•	•	•	•
Shock: designed to meet EN60068-2-27		•	•	•	•
Vibration: designed to meet EN60068-2-6		•	•	•	•
EMC according to EN-55022/55024/61000-6-2/61000-6-4		•	•	•	•
Safety according to EN62368-1		•	•	•	•
MTBF ~200 000h (22.8 Years) <sup>5</sup> excluding battery		•	•	•	•
<b>Optional enhancement cards</b>					
Wireless Module (LTE / GPS / WiFi) <sup>1</sup>		optional	optional	optional	optional

<sup>1</sup> Please contact factory for minimum order quantities

<sup>2</sup> Internal connector

<sup>3</sup> CAN or RS422/488, two COM Ports are software configurable to RS422/488 using CAN DSUB9 connector.

<sup>4</sup> Depending on installation situation and interface connection. Please see user documentation.

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2017 Syslogic Datentechnik AG  
All rights reserved

Syslogic Datentechnik AG  
Täferstrasse 28  
CH-5405 Baden Dättwil

Version 1.2 | June 2017

**For further information and support:**  
info@syslogic.com  
support@syslogic.com  
www.syslogic.com

+41 56 200 90 40 Switzerland (Headquarters)  
+49 7741 967 14 20 Germany and Austria



## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660