

DFI-ACP

○ Revision Control ○ Long Life Cycle



EL620-C Intel® G41 ATX Board

PROCESSOR

- LGA 775 socket supports:
 - Intel® Core™2 Duo E8400/E7400/E6400/E4300
 - Intel® Pentium® E6500/E5300/E2160
 - Intel® Celeron® E3400/E1500/440
- Intel Enhanced Memory 64 Technology (EM64T)
- Enhanced Intel SpeedStep Technology (EIST)
- 1333/1066/800MHz FSB

CHIPSET

- Intel® chipset
 - Intel® G41 Express chipset
 - Intel® ICH7 I/O Controller Hub

SYSTEM MEMORY

- Two 240-pin DDR3 DIMM sockets
- Supports DDR3 800/1066MHz DIMM
- Maximum memory bandwidth of 17GB/s in dual-channel mode when using DDR3 1066MHz
- Supports dual channel memory interface
- Supports up to 4GB system memory
- Supports unbuffered x8 and x16 DIMMs

EXPANSION SLOTS

- 5 PCI slots (PCI 12.3)
- 3 ISA slots

Note: 1 PCI and 1 ISA are shared slots.

ONBOARD GRAPHICS FEATURES

- Integrated Intel GMA X4500
 - 3D, 2D and video capabilities, DX10 and OpenGL 2.1
- Display ports: DVI (Chrontel CH7307C) and VGA

ONBOARD AUDIO FEATURES

- Realtek ALC262 2-channel High Definition Audio
- High performance DACs with 100dB SNR
- ADCs with 90dB SNR
- Two stereo DACs support 24-bit PCM format for stereo audio playback
- Three stereo ADCs support 20-bit PCM format for multiple input streaming
- S/PDIF audio interface

ONBOARD LAN FEATURES

- 2 Realtek RTL8111DL PCI Express Gigabit Ethernet controllers
- 10Mbps, 100Mbps and 1Gbps data transmission
- IEEE 802.3u (10/100Mbps) and IEEE 802.3ab (1Gbps) compliant

SERIAL ATA (SATA) INTERFACE

- 4 Serial ATA ports compliant with SATA 1.0a specification
- SATA speed up to 3Gb/s (SATA 2.0)

IDE

- Supports up to two IDE devices
- Ultra ATA 100/66/33

SUPER I/O

- Winbond W83627DHG-P: supports 8-bit Digital I/O and printer port
- Fintek F81217U: supports COM1 to COM4
- Fintek F81217U: supports COM5 to COM8

ISA INTERFACE

- ITE IT888G: PCI to ISA slot bridge
 - 3 ISA slots
 - Does not support ISA Master devices and ISA DMA devices

REAR PANEL I/O PORTS

- 1 mini-DIN-6 PS/2 mouse port
- 1 mini-DIN-6 PS/2 keyboard port
- 2 DB-9 serial ports
 - Supports RS232/422/485
 - Pins 1 and 9 of RS232 functions as RS232 signal or power (selectable via jumper)
- 1 DB-15 VGA port
- 1 DVI port (DVI-D signal only)
- 2 RJ45 LAN ports
- 4 USB 2.0/1.1 ports
- Mic-in, line-in and line out jacks

I/O CONNECTORS

- 2 connectors for 4 external USB 2.0/1.1 ports
- 6 connectors for 6 external RS232 serial ports
- 1 8-bit Digital I/O connector
- 1 front audio connector for line-out and mic-in jacks
- 1 CD-in connector
- 1 S/PDIF connector
- 4 Serial ATA connectors
- 1 40-pin IDE connector
- 1 25-pin parallel connector
- 1 24-pin ATX power connector
- 1 4-pin 12V power connector
- 1 chassis intrusion connector
- 1 front panel connector
- 3 fan connectors

BIOS

- AMI BIOS
- 8Mbit SPI BIOS

ENERGY EFFICIENT DESIGN

- ACPI v3.0b specification
- System Power Management
- Wake-On-Events include:
 - Wake-On-PS/2 KB/Mouse
 - Wake-On-USB KB/Mouse
 - Wake-On-LAN
- Microsoft®/Intel® APM 1.2 compliant
- AC power failure recovery

DAMAGE FREE INTELLIGENCE

- Monitors CPU/System/NB temperature and overheat alarm
- Monitors CPU/DIMM/NB/5V/12V/1.1V/VBAT voltages and failure alarm
- Monitors CPU/System/2nd fan speed and failure alarm
- Read back capability that displays temperature, voltage and fan speed
- Watchdog timer function

TEMPERATURE


- 0°C to 60°C

HUMIDITY

- 10% to 90%

PCB

- ATX form factor
- 305mm (12") x 244mm (9.6")

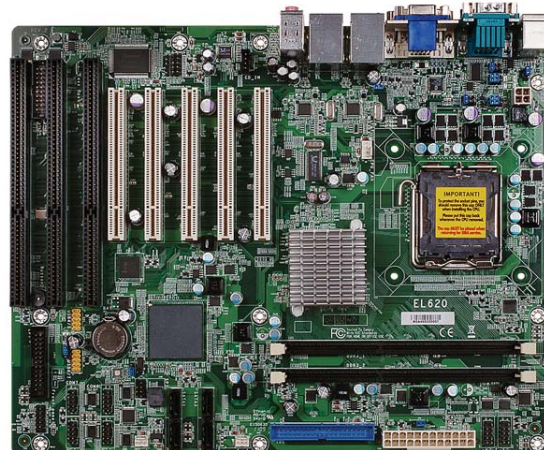

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies.
© September 29, 2011 DFI Inc.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660