


# GOT3187W-881-PCT

18.5" WXGA TFT Fanless Multi Touch Panel Computer with LGA1150 Socket 4th Generation Intel® Core™ i7/i5/i3 & Celeron® Processor (0°C ~ +40°C)

**NEW**

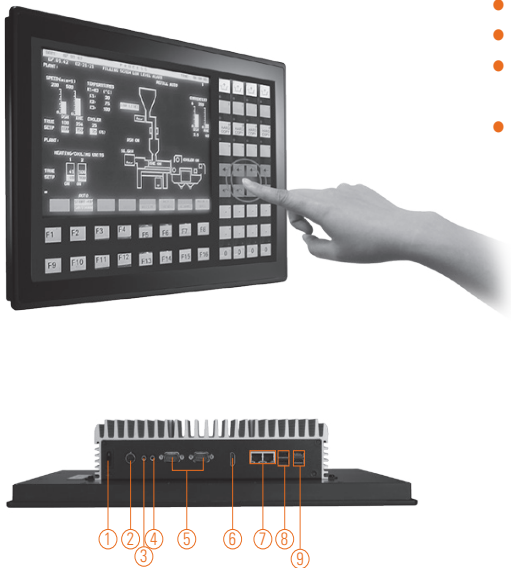

- |                            |                      |                                |
|----------------------------|----------------------|--------------------------------|
| 1. Power Switch (ATX)      | 6. HDMI output       | 11. For 3 x antennas           |
| 2. Power Input connector   | 7. Dual Gigabit LAN  | 12. LED Backlight Power On/off |
| 3. Audio Line-out          | 8. 2 x USB 2.0       | 13. Brightness +               |
| 4. Audio MIC-in            | 9. 2 x USB 3.0       | 14. Brightness -               |
| 5. COM1/2 (RS-232/422/485) | 10. CFast™ card slot |                                |



## Introduction

The GOT3187W-881-PCT adopts a 18.5-inch TFT LCD and supports LGA1150 Socket 4th Generation Intel® Core™ i7/i5/i3 & Celeron® processor that can support Windows® 7, Windows® 7 Embedded, Windows® 8, Windows® 8 Embedded and variety applications. This fanless platform has below abilities make it surely a robust and cost-effective solution.

### High Performance Intel® Core™-based Haswell Processor

The GOT3187W-881-PCT supports LGA1150 Socket Intel® Core™ i7/i5/i3 & Celeron® processors. User can choose different processors for different applications. It also supports up to 8 GB DDR3 1333/1600 MHz memory modules. There are rich I/O, such as dual PCIe Mini Card slot, 2.5" HDD bay, USB 3.0 port, RS-232/422/485, HDMI output. This platform is a power-efficient solution.

### Reliable and Stable Design


The GOT3187W-881-PCT is a fanless cooling system, which makes it suitable for vibration environments, such as the industrial machinery markets. For high capacity storage requirement, the industrial panel PC can work under 1.2 G (10 ~ 500Hz, random for CFast™ card) in operation mode with a patent of anti-vibration design. The patent improves the system reliability and sustainability.

### 18.5-inch Projected Capacitive Multi-touch


18.5 inch WXGA TFT LCD is with 300nits higher brightness and can displays contents in HD resolution. With projected capacitive multi-touch, users can operate more directly and friendly. The hardness of touch glass surface is up to 7h and is better for anti-scratch purpose.

## Features

- 18.5-inch WXGA projected capacitive multi-touch screen
- Fanless design with LGA1150 socket 4th generation Intel® Core™ i7/i5/i3 & Celeron® processor (Haswell)
- Supports 2.5" SATA HDD, CFast™ and mSATA
- Supports WLAN module & antenna (optional)
- Supports 2 Gigabit LAN, 2 USB 3.0, 2 USB 2.0 & 2 COM ports
- IP65 front bezel and rugged design
- Supports panel mount and optional VESA arm/desktop stand/ wall mount
- Supports dual PCI Express Mini card slots



▲ Rear view

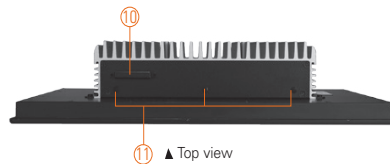

▲ Top view

## Specifications


Front Bezel	IP65 front bezel		
LCD Panel	Display Type	18.5" WXGA TFT LCD	
	Brightness (cd/m <sup>2</sup> )	300 nits	
	Resolution	1366 x 768	
Main System	CPU	LGA1150 socket 4th generation Intel® Core™ i7/i5/i3 & Celeron® processor (Haswell)	
	Chipset	Intel® H81	
	System Memory	1 x 204-pin DDR3 max. up to 8 GB	
	BIOS	AMI UEFI BIOS	
	Storage	1 x 2.5" SATA HDD	
		1 x CFast™ card and mSATA	
	Watchdog Timer	255 levels, 0-255 sec.	
	Onboard Graphics	Integrated Intel® GFX	

\* All specifications and photos are subject to change without notice.

**Specifications**

I/O Connector	2 x RS-3232/422/485 (COM1/2) 1 x Switch for power on/off (ATX) 2 x Audio (Line out & MIC-in) 2 x USB 3.0, 2 x USB 2.0 1 x HDMI 2 x 10/100/1000Mbps Ethernet
Expansion Interface	2 x PCIe Mini Card slot
Touchscreen	Projected capacitive multi-touch
Power Supply	19VDC
Dimensions	460 mm (18.1") (W) x 89.5 mm (3.5") (D) x 285 mm (11.2") (H)
Packing Dimensions	600 mm (23.58") (W) x 19.5 mm (7.67") (D) x 500 mm (19.68") (H)
Weight (net/gross)	6.3 kg (13.9 lb) / TBD
Environment	Operating temperature: 0°C ~ +40°C (+32°F ~ +104°F) Storage temperature: -20°C ~ +60°C (-4°F ~ +140°F) Relative humidity: 20% ~ 90% @ 40°C; non-condensing Operation vibration: 1.2G, 10 ~ 500Hz, random for CFast™ card
Certificate	CE
* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.	
* If the operation temperature is higher than 40°C, the wide temperature SSD/CFast™ card are recommended to be used on the device.	
* If the operation temperature is higher than 45°C, the wide temperature DRAM is recommended to be used on the device.	

**Dimensions**

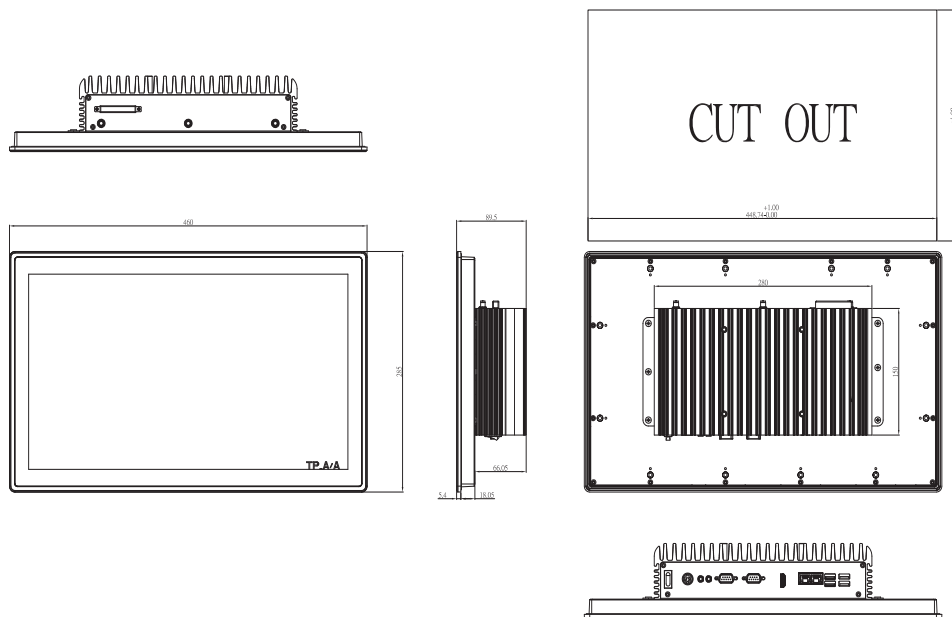

**Ordering Information**

GOT3187W-881-PCT-NP	18.5" WXGA TFT fanless PCAP multi-touch panel computer support Intel® LGA1150 socket with AC adapter
---------------------	--

**Optional EOS Installation**

WE8S
WES 7

**Optional OS Installation**

Windows® 8.x
Windows® 7



▲ Ideal for factory automation & self-service kiosk in retail

Overview

Industrial Panel Computers & Monitors

2

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

\* All specifications and photos are subject to change without notice.



## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660