

LNX-1802GN Series


18-Port Industrial Managed Ethernet Switch, w/16*10/100Tx and 2*GigE Combo Ports



Features

- ▶ 16-Port 10/100Tx and 2-Port 10/100/1000T/Mini-GBIC Combo
- ▶ 7.2 Gbps Back-Plane (Switching Fabric)
- ▶ Ethernet Ring Redundancy (Recovery Time <20ms)
- ▶ IEEE 802.1w Rapid Spanning Tree & IEEE 802.1d Spanning Tree Protocol
- ▶ IEEE 802.1x RADIUS
- ▶ IEEE 802.1p Class of Service for Traffic Classification & Prioritization
- ▶ QoS (Quality of Service)
- ▶ Supports Port Based VLAN & IEEE 802.1Q Tag VLAN
- ▶ IGMP with Query Mode for Multi-Media Applications
- ▶ Port Mirroring for Traffic Monitoring
- ▶ IP Address Security Management to Prevent Unauthorized Access
- ▶ UL Class 1 Division 2 Certified
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range: STD: -10° to 70°C, EOT: -40° to 80°C
- ▶ 5-Year Warranty

DIMENSIONS

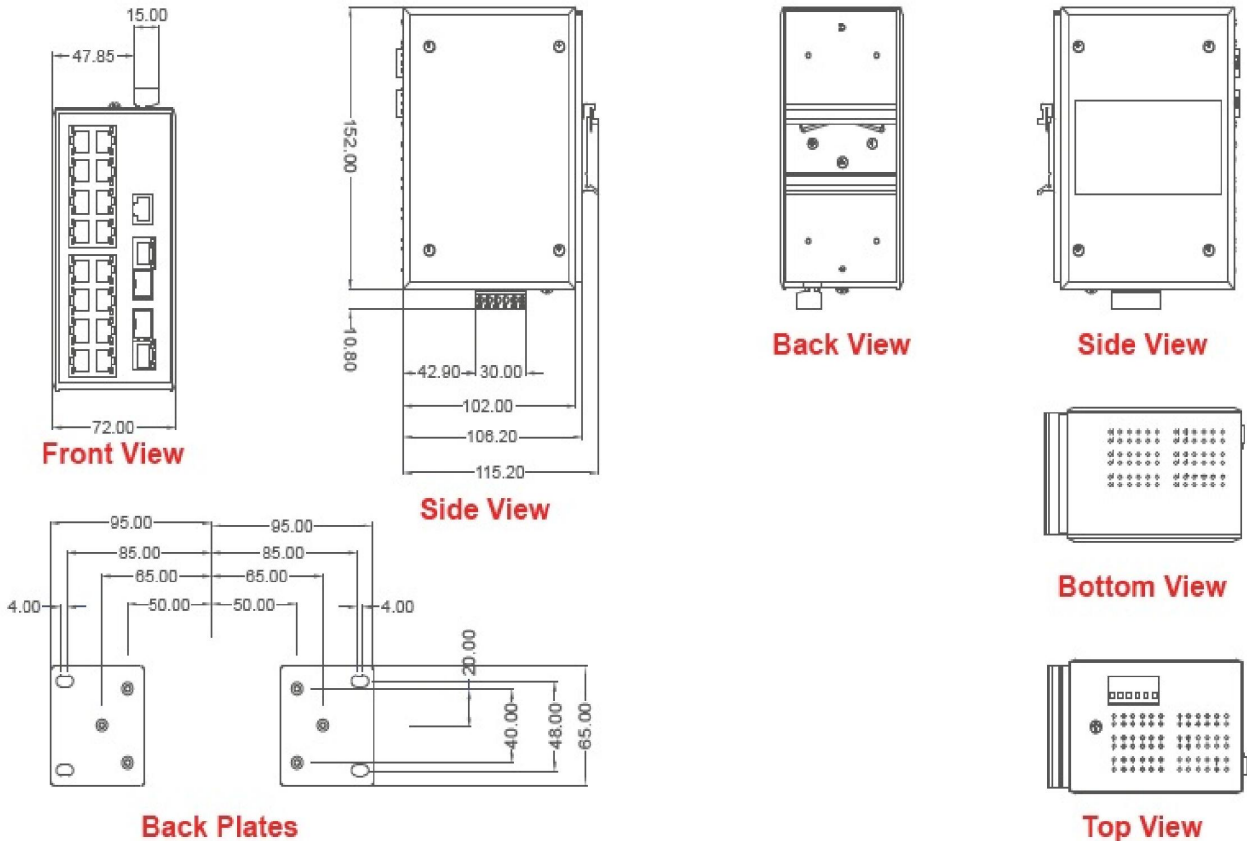

SPECIFICATIONS

Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX IEEE 802.3ab 1000BaseT IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control and Back-Pressure IEEE 802.3ad Port Trunking with LACP IEEE 802.1d Spanning Tree / IEEE 802.1w Rapid Spanning Tree IEEE 802.1p Class of Service IEEE 802.1Q VLAN Tag IEEE 802.1x User Authentication (RADIUS)	Class of Service (IEEE 802.1p)	Provides 4 priority queues per port
Management	SNMP v1, v2c, v3, Web, Telnet, CLI Management	Quality of Service	Port, Tag, IPv4 Type of Service, IPv4 / IPv6 Different Service
VLAN	Port Based, IEEE 802.1Q Tag VLAN (256 Entries) VLAN ID (Up to 4K, 0 to 4096), GVRP (256 Groups)	IGMP	IGMP v1, v2, and Query Mode. Up to 256 Groups
RFC Standard (SNMP MIB)	RFC1215 Trap, RFC1213 MIB II, RFC1157 SNMP MIB, RFC1493 Bridge MIB, RFC2674 VLAN MIB, RFC1643, RFC1757 RSTP MIB, Private MIB	Spanning Tree	IEEE 802.1d Spanning Tree IEEE 802.1w Rapid Spanning Tree
SNMP Trap Protocol	Up to 3 Trap Stations CSMA/CD	SNTP	Supports Simple Network Time Protocol
Switch Architecture	Back-Plane (Switching Fabric): 7.2Gbps Packet Throughput Ability (Full-Duplex): 10.7Mpps @ 64bytes	SMTp	Supports Simple Mail Transfer Protocol (6 email Accounts for Alerts)
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Fiber Ethernet Port	IP Security	Supports up to 10 IP Addresses for Secured Access
MAC Address	8K MAC Address Table	System Event Log	Supports System Log Record and Remote System Log Server
Packet Buffer	1 Mbits	Port Mirror	TX, RX, or Both Packets
Flash ROM	4 Mbytes	Port Security	100 MAC Address Entries for Static MAC and 100 MAC Filters
DRAM	32 Mbytes	Login Security	IEEE 802.1x Authentication/RADIUS
LED	Unit: Master, Power, Power 1, Power 2, Fault 10/100 TX: Link/Activity, Full-Duplex/Collision Gigabit Copper: Link/Activity, Speed SFP: Link/Activity	DHCP	DHCP Client, DHCP Server Functions
Interface	10/100TX: 16 x RJ-45 10/100/1000T/Mini-GBIC Combo: 2*RJ-45 + 2*100/1000 SFP Sockets RS-232 Connector: RJ-45 type	DNS	DNS Client Feature and Primary & Secondary DNS Server
Network Cable	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)	Bandwidth Control	Supports Ingress and Egress packet limit Provides 1 Relay Output (1A @ 24VDC) for Port Breakdown and Power Fail
Optical Cable	LC (Multi-Mode): 50/125µm ~ 62.5/125µm LC (Single-Mode): 9/125µm ~ 10/125µm Available Distance: See SFP Specifications Wavelength: 1310nm (Multi-Mode and Single-Mode)	Alarm	Supports TFTP Firmware Update, Config. Backup & Restore
Port Trunk with LACP	LACP Port Trunk: 4 Trunk Groups / Maximum 4 Trunk Members	Firmware Update	Supports Binary Configuration File for Quick System Installation
Redundant Ring	Supports Redundant Ring, Dual Homing, and Couple Ring Redundant Backup Feature and Recovery Time < 20 ms	Configuration Upload & Download	DC 12 ~ 48V, Redundant Power with Polarity Reverse Protect Function and Connective Removable Terminal Block
Flow Control	Flow Control for Full-Duplex and Back Pressure for Half-Duplex	Power Supply	DC 12 ~ 48V, Redundant Power with Polarity Reverse Protect Function and Connective Removable Terminal Block
		Power Consumption	11.5 Watts
		Mechanical	Casing: IP30 Metal Case, DIN-Rail/Wall Mountable Dimension (W x H x D): 72 x 152 x 105 mm (2.83 x 4.13 x 5.98 in.) Weight: 2.2 lbs. (Unit Weight), 3.3 lbs. (Shipping Weight)
		Operation Temperature	Standard: -10°C to 70°C (14°F to 158°F) Wide Operating Temperature: -40° to 80°C (-40° to 176°F)
		Operation Humidity	5% to 95% (Non-condensing)
		Storage Temperature	-40° to 85°C
		EMI	FCC Class A, CE EN6100-4-2,3,4,5,6,8,11,12, EN6100-6-2,4
		Safety	UL 60950-1, UL Class 1 Division 2, ISA 12.12.01
		Stability Testing	Shock: IEC60068-2-27 Free Fall: IEC60068-2-32 Vibration: IEC60068-2-6
		Warranty	5 Years

ORDERING INFO

LNX-1802GN	18-Port Industrial Managed Ethernet Switch, w/16*10/100Tx + 2*GigE Combo Ports
LNX-1802GN-T	18-Port Industrial Managed Ethernet Switch, w/16*10/100Tx + 2*GigE Combo Ports; EOT: -40° to 80°C
Optional Accessories	
SFP-M	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, 0° ~ 70°C
SFP-S10	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, 0° ~ 70°C
DR-45-24	45 Watt Series Industrial Single Output DIN-Rail Power Supply - 24 VDC / 2.0 Amps
DR-75-24	75 Watt Industrial Single Output DIN-Rail Power Supply - 24 VDC / 3.2 Amps
DR-120-24	120 Watt Industrial Single Output DIN-Rail Power Supply - 24 VDC / 5.0 Amps

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660