

# FPC-9000-L2U4

Robust Box PC with Intel® Xeon® E3/6<sup>th</sup> & 7<sup>th</sup> Generation Core™ i7/i5/i3 Processor



## Features


- **Fanless design**
- Wide range DC power input (9~36V)
- DisplayPort x 1 + HDMI x1 + VGA x 1 and DVI x 1 (support 3 independent displays)
- Rich I/O ( 10 x USB, 5 x GbE LAN, 4 x COM )
- Power on/off delay control / configurable ignition power control
- TPM 2.0 support
- RTC battery service window support
- Two-mPCIe for optional WiFi/3G/4G/GPS or I/O expansion supported
- 2 SATA SSD (1 x removable, 1 x internal), support RAID 0,1
- Front-accessible I/O support

Embedded Computing


<b>System</b>	
CPU	Intel® Xeon® E3/6 <sup>th</sup> & 7 <sup>th</sup> generation Core™ i7/i5/i3 processor in LGA1151 socket
Memory	2 x 260-pin DDR4 SO-DIMM sockets, supporting 2133 MHz SDRAM up to 32GB
Chipset	Intel® C236
Graphics	Integrated Intel® HD Graphics
ATA	2 x Serial ATA ports with 600MB/s HDD transfer rate
LAN Chipset	2 x Intel® WG1211AT GbE controllers 1 x Intel® WG1219LM GbE controller w/ iAMT 11.0 2 x Intel® WG82583V GbE controllers
Watchdog Timer	1~255 levels reset
<b>I/O</b>	
Serial Port	2 x RS-232/422/485 configurable via DB-9 connectors 2 x RS-232 ports via DB-9 connectors
USB Port	6 x USB 3.0/ 2.0 ports 4 x USB 3.0/ 2.0 ports
LAN	5 x RJ-45 ports for GbE
Video Port	1 x DisplayPort 1 x HDMI 1 x DB-15 female connector for Analog RGB 1 x DVI-D female connector for digital video output * Support 3 independent displays
Selectable Port	1 x DB25 connector for DIO (8 in/8 out) port or LPT port (either one, default is DIO)
Audio	Mic-in/Line-out
Expansion Bus	1 full-size & 1 half-size Mini-card interconnected for optional WiFi/3G/4G/GPS or I/O Expansion 1 x SIM socket
<b>Environmental</b>	
Operating Temp.	-20 ~ 55°C (-4 ~ 131°F), ambient w/ air flow, ( w/ 35W~65W TDP CPU, fanless )
Storage Temp.	-40 ~ 75°C (-40 ~ 167°F)
Operating Humidity	10 ~ 95% @ 55°C (non-condensing)
Vibration	3 Grms/5~500Hz/random operation w/ SSD

Shock	Operating 40G (11ms), Non-operating 60G with SSD
<b>Qualification</b>	
Certification	CE, FCC Class A
<b>Power Requirement</b>	
Power Input	DC 9~36V input ( w/ 4-pin DC input terminal block, combining remote power on/off switch
Ignition Switch	2-pin terminal block : IGN, GND
Power Consumption	Max. 75W (w/ 35W TDP CPU w/o I/O card) Max. 105W (w/ 65W TDP CPU w/o I/O card)
<b>Storage</b>	
Type	2 x 2.5" drive bays 1 x CFAST socket, can be outside accessible
<b>Mechanical</b>	
Construction	Aluminum alloy
Mounting	Wall-mount
Weight	6.4kg (14.1lb )
Dimensions (W x D x H)	225 x 292 x 90mm (8.86" x 11.50" x 3.54")
<b>OS Support</b>	
Windows 10 IOT ( For 7th Gen Intel CPU) Windows 7 / Windows 8.1 / Windows 10 IOT ( For 6th Gen Intel CPU) Linux ( Kernel 4.4.x )	
<b>Ordering Information</b>	
FPC-9000-L2U4	Fanless box PC for 35W~65W CPU, w/ 10 x USBs, 5x GbE LANs




All specifications are subject to change without notice.



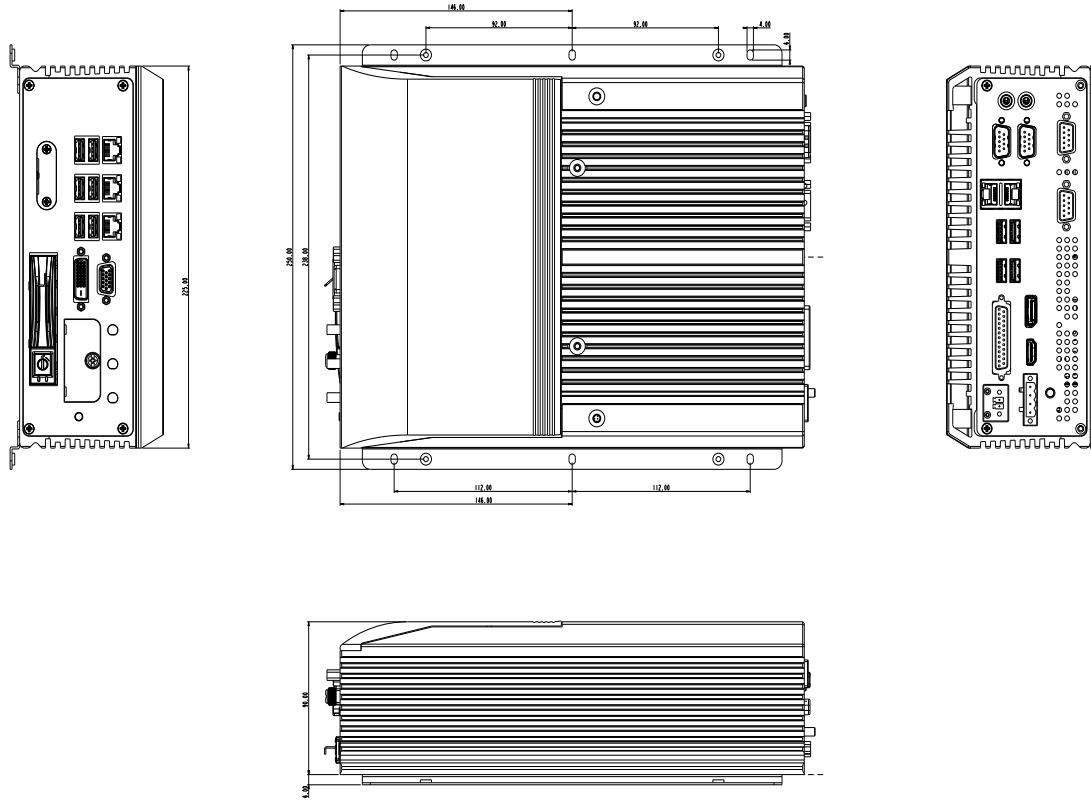





Dimensions



**Optional Accessories**

WMK-7000	Wall-mount kit for FPC-7XXX Series	
PAC-120W6B-FSP	120W AC/DC adapter kit w/ 2-pin/3-pin/4-pin block	
PAC-180W6C-FSP	180W AC/DC adapter kit w/ 2-pin/3-pin/4-pin block	

**Optional Configuration (CTOS\* Kit)**

240GB SSD	Intel® 2.5" 240GB SATAIII SSD kit		
WIFI-AT4550	Atheros QCNFA324 Wi-Fi module w/ 2x30cm internal wires		
ANT-H11	1 x 2dBi HSUPA antenna		
ANT-D11	1 x WiFi dual-band 2.4G/5G antenna		
Core™ i7-7700	Intel® 7 <sup>th</sup> Gen. Core™ i7-7700 processor, L2/8M, 3.6G		
Core™ i7-7700T	Intel® 7 <sup>th</sup> Gen. Core™ i7-7700T processor, L2/8M, 2.9G		
Core™ i5-7500	Intel® 7 <sup>th</sup> Gen. Core™ i5-7500 processor, L2/6M, 3.4G		
Core™ i5-7500T	Intel® 7 <sup>th</sup> Gen. Core™ i5-7500T processor, L2/6M, 2.7G		
Core™ i3-7101TE	Intel® 7 <sup>th</sup> Gen. Core™ i3-7101TE processor, L2/3M, 3.4G		
Xeon™ E3-1268L-V5	Intel® 6 <sup>th</sup> Gen Xeon™ E3-1268L processor, L2/8M, 2.4G		
MK-4C-4G/8G/16G	DDR4-2133 4GB/8GB/16GB SDRAM DIMM kit		

\*CTOS means Configure-to-Order Service.

Last update: 29/6/2022

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660