

CAPA13S NEW

3.5" Embedded SBC with AMD Ryzen™ Embedded V1807B/V1605B APU, DisplayPort++, 2 HDMI, eDP and 3 GbE LAN

Features

- AMD Ryzen™ Embedded V1807B and V1605B APU
- 1 DDR4 SO-DIMM for up to 16GB of memory
- Supports quad-view 4K/2K display
- 3 GbE LAN
- M.2 Key E
- M.2 Key B



Core System



CPU	AMD Ryzen™ Embedded V1807B/V1605B APU onboard
System Memory	1 x 260-pin DDR4-2400 (V1605B), DDR4-3200 (V1807B) SO-DIMM, up to 16GB
Chipset	SoC integrated
BIOS	AMI
SSD	1 x M.2 Key B (SATA, USB 2.0, PCIe x2 for optional) in 22 x 42 or 30 x 42
Watchdog Timer	255 levels, 1 to 255 sec.
Expansion Interface	1 x M.2 Key E (PCIe x1, USB 2.0) in 22 x 30
Battery Lithium	Lithium 3V/220 mAh
Power Input	2 x 2-pin connector +12V DC-in only AT Auto Power On function supported
Power Requirement	AMD V1605B @2.0 GHz 16GB DDR4, min. RMS. +12V@3.1A AMD V1807B @3.35 GHz 16GB DDR4, min. RMS. +12V@5.1A
Dimensions	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	-20°C to +60°C (-4°F to 140°F)
Humidity	10% - 95% relative humidity, non-condensing

I/O


SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	2 x 10/100/1000 Mbps Ethernet with Realtek RTL8111G; support Wake-on-LAN, PXE Boot ROM 1 x 10/100/1000 Mbps Ethernet with Realtek RTL8111G; support Wake-on-LAN, PXE Boot ROM (optional)
Audio	HD Codec audio as Mic-in/Line-in/Line-out with Realtek ALC662
USB	2 x USB 2.0 2 x USB 3.2 Gen2
Serial	1 x RS-232/422/485 1 x RS-232
TPM	ST ST33HTPH2E32AHB4 with TPM 2.0 compliant
SMBus	N/A
Digital I/O	8-channel in/out programmed

Display

Chipset	AMD Radeon™ RX Vega Graphics
Memory Size	Share System memory
Display Interface	1 x DisplayPort++ 2 x HDMI 1 x eDP

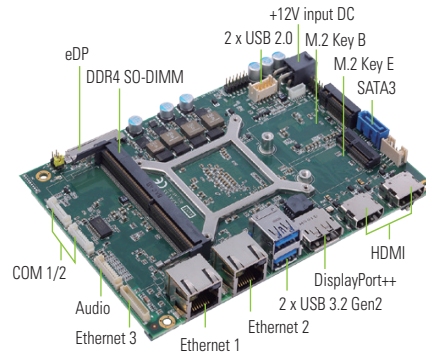

▲ Top view



▲ Rear view



▲ Assembly View

Ordering Information

Standard

CAPA13S-GGA-V1605B: FAN (P/N: E38E13S103)	3.5" Embedded SBC with AMD Ryzen™ V1605B (2.0 - 3.6 GHz, 2MB Cache, 15W) DisplayPort++, 2 HDMI, eDP, 2 GbE LAN, audio and fan
CAPA13S-GGA-V1807B: FAN (P/N: E38E13S102)	3.5" Embedded SBC with AMD Ryzen™ V1807B (3.35 - 3.8 GHz, 2MB Cache, 45W) DisplayPort++, 2 HDMI, eDP, 2 GbE LAN, audio and fan

Optional

CAPA13S-3GA-V1605B: FAN (P/N: E38E13S101)	3.5" Embedded SBC with AMD Ryzen™ V1605B (2.0-3.6 GHz, 2MB Cache, 15W), DisplayPort++, 2 HDMI, eDP, 3 GbE LAN, audio and fan
CAPA13S-3GA-V1807B: FAN (P/N: E38E13S100)	3.5" Embedded SBC with AMD Ryzen™ V1807B (3.35-3.8 GHz, 2MB Cache, 45W), DisplayPort++, 2 HDMI, eDP, 3 GbE LAN, audio and fan
594H3186800E	Buzzer cable 9 x 55 mm 2-pin, L=400 mm
59380880250E	COM port cable DB9-9 x 1P, P=1.25, L=250 mm
594E8422800E	2 x USB 2.0 cable with bracket, 180 mm
7128E13R000E	Heatspreader



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660