


# MIX-Q370D1

Mini-ITX with 8th/9th Gen Intel® Core™ Processor Family, DDR4 DRAM, USB x 10, Max. 65W TDPs

Industrial Motherboards

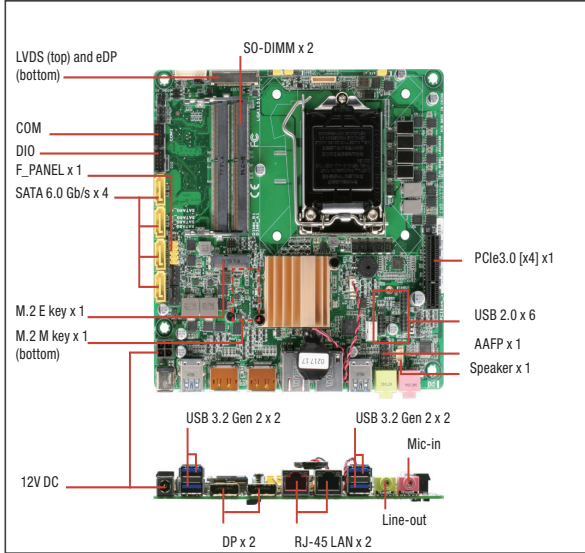

## Features

- DDR4 SODIMM x 2, Up to 32 GB
- Three Independent Display: DP x 2, eDP x 1, LVDS x 1
- Intel® LAN 210AT x 1, 219LM for iAMT 12.0 x 1
- M.2 Slot (M-key) x 1
- M.2 Slot (E-key) x 1
- USB 3.2 Gen 2 x 4, USB 2.0 x 6
- PCIe [x4] x 1
- Low Profile
- 12V DC Power Input
- Support Intel® NVMe M.2 SSD



### Rear Panel I/O Ports

USB	USB 3.2 Gen 2 (10 Gbps) x 4
Display I/O	DP x 2
Audio I/O	Mic-in x 1, Line out x 1
LAN I/O	LAN (RJ45) port x 2
Serial Port	—
PS/2 Port	—
Others	DC Jack

### Internal I/O Connectors

Storage	SATA 6.0Gb/s x4 M.2 M key (22 x 80 mm) x1 (Support Intel® NVMe M.2 SSD)
USB	3 x USB 2.0 pin header support additional 6 USB ports
Display I/O	40-pin LVDS connector x 1 40-pin eDP connector x 1 LCD backlight connector (inverter) x 1
Audio I/O	Speaker for 2W/4Ω x 1 AAFP follow ASUS pin out x 1
Serial Port	Box header x 1 for COM (COM1: RS-232/422/485 supports 5V/12V/RI)
PS/2 Port	—
Parallel Port	—
DIO	8-bit x 1 (In/Out programmable)
FAN	4-pin Chassis Fan connector x 1 4-pin CPU Fan connector x 1
Power	12V DC Power jack x 1
Others	Front panel header x 1 Clear CMOS jumper x 1 AT/ATX select jumper x 1 Chassis Intrusion x 1 4-pin SATA power x 1

### OS

OS Support	Windows® 10 64 bit, Ubuntu 16.04 LTS
------------	--------------------------------------

## Specifications

System	
Processor	8th/9th Generation Intel® Core™ i7/ i5/ i3, Pentium® LGA 1151 socket Processor (formerly Coffee Lake-S), Max. 65W TDPs
Chipset	Intel® Q370 Express Chipset
Memory	SODIMM x 2, Max. 32GB, DDR4 2666/2400 MHz, Non-ECC, Un-buffered Memory, Dual channel
I/O Chipset	NCT6793D
Ethernet	Intel® PHY i219LM Giga LAN (support Intel® AMT 12.0) x 1 Intel® i210AT Giga LAN x 1
Audio	Realtek® ALC897
TPM	Nuvoton TPM version 2.0
Expansion Slots	PCIe 3.0 [x4] x 1 M.2 M key (22 x 80 mm) x 1 at Bottom side, SATA & PCIe [x4] M.2 E key (22 x 30 mm) x 1 for Wireless-wifi module (PCIe+USB)
BIOS	256M bit Flash ROM, AMI BIOS
H/W Monitor	Temperature Monitor on CPU/System, Voltage Monitor on Vcore/5V/3.3V/12V, Fan Monitor on Chassis
WatchDog Timer	1~255 steps by software program
Smart Fan Control	CPU Fan/Chassis Fan
Wake On LAN/ PXE	Yes (WOL/PXE)
Power State	S3, S4, S5
Graphics	
Graphics Chipset	Intel® UHD Graphics
Graphics Multi Display	Three Independent Display
VGA	—
DVI	—
HDMI	—
Display Port	Up to 4096 x 2160 @ 24 Hz / 3840 x 2160 @ 60 Hz, with Digital Audio, DP++ supported
LVDS	LVDS Up to 1920 x 1200 @ 60 Hz, dual-channel 18/24 bit (via Chronitel 7511)
eDP	eDP UP to 4096 x 2304 @ 60Hz
Backlight Control	Voltage/PWM
Environment & Power & ME	
Battery	Lithium battery
Power Requirement	12V DC
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% R/H, non-condensing
Certificate	CE & FCC (Class A)
Form Factor	Mini-ITX: 6.7" x 6.7" (170 mm x 170 mm)
Weight	1.1 lb (0.5 Kg)
MTBF (Hours)	256,310

## Packing List


- SATA Cable
- SATA Power Cable
- I/O Shield
- MIX-Q370D1

# MIX-Q370D1

10


Industrial Motherboards

## Block Diagram

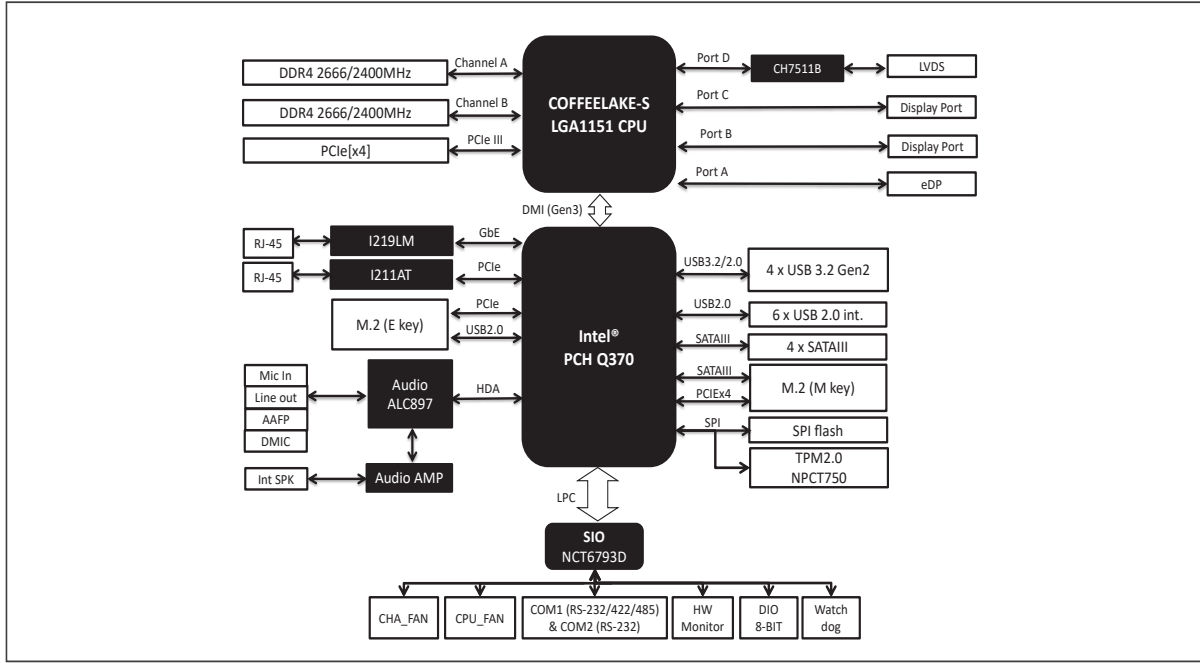

## Dimension

Unit: mm

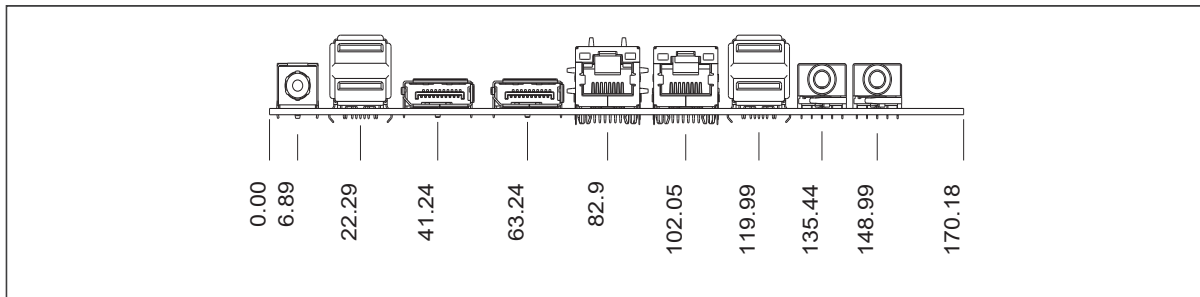

## Ordering Information

Part Number	CPU	RAM	Fan/Fanless	Display	Storage	LVDS	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	TPM	Temp.
MIX-Q370D1-A12	Socket	SODIMM x 2	Fan	DP x 2, LVDS, eDP	SATA3 x 4, M.2(M-key)	Dual Channel 18/24 bit	GbE x 2	USB2.0 x 6, USB 3.2 Gen 2 x 4	—	1	PCIe3.0(x4) x 1, M.2(M-key) x 1, M.2(E-Key) x 1	12V DC	2.0	32°F ~140°F (0°C ~ 60°C)

## Optional Accessories

Part Number	Description
1759200172	(TF)CPU Cooler Fan, LGA 1156 socket, 4P, 12V, 2-Ball Bearing, Dynatron, K785, (2U cooler)
175921156B	(TF)CPU Cooler Fan, LGA 1156 socket, 12V, 4P, 2Ball (Tray), Dreamer, DSA-00273
COOLER-65W-01	CPU Cooler, LGA 1156, 12V, 65W, 4P, Kingcooler, 0571-1463R
1709100201	USB 2.0 Cable (10P, 200MM, p=2.00mm, w/bracket)
1700100491	USB 2.0 Cable (2 x 5P, 490mm, p=2.00mm)
1709050201	USB 2.0 Cable (5P, 220mm, p=2.00mm)
1701100206	COM Cable (200MM, p=2.00mm)
1702150300	SATA Power Cable (4P, 300MM p=2.54mm)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660