

## LNX-C500-CC Series

5-Port Industrial Compact Unmanaged Ethernet Switch, with 5\*10/100Tx and Conformal Coating



### Features

- ▶ Conformal Coating
- ▶ Compact Industrial Grade Design
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Power Polarity Reverse Protect
- ▶ Overload Current Protection
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range: STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty


### INTRODUCTION

Antaira's compact design LNX-C500-CC series industrial unmanaged Ethernet switch is IP30 rated and DIN-Rail mountable. The LNX-C500 series is equipped with 5\*10/100Tx RJ45 Ethernet ports; with a backplane speed of 1gbps. The small form factor of this industrial switch is 30% smaller allowing for a more versatile implementation.

Conformal coating is a specialty film which conforms to the contours of the printed circuit board to protect the board from adverse environmental conditions. Antaira's conformal coating process meets or exceed the standards for protection against gases, dust, and water.

The LNX-C500-CC series is a perfect industrial networking product to support any application such as power/utility, water wastewater treatment, oil/gas/mining, process control automation, security access control systems, and intelligent transportation systems.

### DIMENSIONS

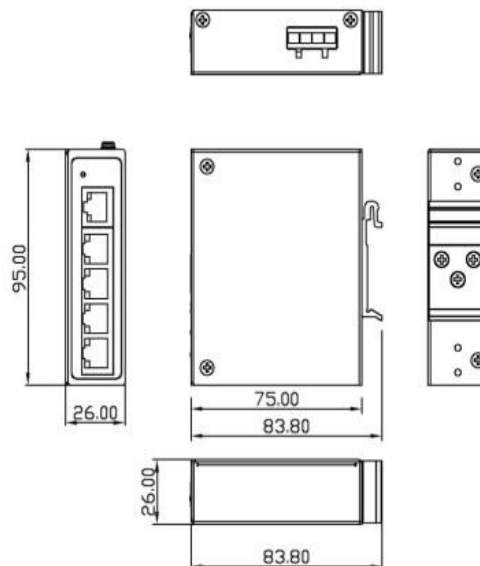

## SPECIFICATIONS

<b>Technology</b>		<b>Power Requirement</b>	
<b>Standards</b>	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet	<b>Input Voltage</b>	12~48VDC Redundant Input
<b>Processing Type</b>	Store-and-Forward	<b>Power Connection</b>	1 removable 4-contact terminal block
<b>Protocol</b>	CSMA/CD	<b>Reverse Polarity Protection</b>	Present (the unit will not be on, if power reverse)
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	<b>Overload Current Protection</b>	Present
<b>Switch Properties</b>		<b>Power Consumption</b>	1.2 Watts
<b>Packet Buffer</b>	448 Kbits	<b>Environmental Limits</b>	
<b>MAC Table Size</b>	8K	<b>Operating Temperature</b>	STD: -10° to 70°C EOT: -40° to 75°C
<b>Interface</b>		<b>Storage Temperature</b>	-40°~85°C
<b>Ethernet Port</b>	5*10/100BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable	<b>Regulatory Approvals</b>	
<b>LED Indicators</b>	Power and Port Link/Activity Status	<b>EMI</b>	FCC Class A
<b>Mechanical Characteristics</b>		<b>EMS</b>	EN61000-4-2,3,4,5,6,8
<b>Housing</b>	Metal, IP30 protection	<b>Free Fall</b>	IEC60068-2-32
<b>Dimensions</b>	26 x 95 x 75 mm	<b>Shock</b>	IEC60068-2-27
<b>Weight</b>	Unit: 1.0 lb Shipping: 1.5 lbs	<b>Vibration</b>	IEC60068-2-6
<b>Mounting</b>	DIN-Rail; Wall-mount (optional)	<b>Green</b>	RoHS Compliant
		<b>Certifications</b>	FCC, CE, UL61010-1,61010-2-201
		<b>Compliance</b>	NEMA TS1/TS2 IEC 60068-2-11, IEC 60068-2-52, IEC 60068-2-60
		<b>Corrosion Prevention</b>	IPC-CC-830B, MIL-I-46058C, IEC 61086-2 (Class 2), UL 94, UL 746E ISO 9223 (Class C5-Very High, Class GX-Severe) ANSI/ISA 71.04 (Class GX-Severe)
		<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LNX-C500-CC</b>	5-Port Industrial Compact Unmanaged Ethernet Switch, with 5*10/100Tx and Conformal Coating
<b>LNX-C500-T-CC</b>	5-Port Industrial Compact Unmanaged Ethernet Switch, with 5*10/100Tx; EOT: -40°~75°C and Conformal Coating

### Optional Accessories

<b>DIN-RACK-2U</b>	DIN-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height
<b>DIN-RAIL-10</b>	35mm Steel DIN-Rail Track – 10 Inches Long
<b>DR-15-12</b>	15 Watt Industrial Single Output DIN Rail Power Supply – 12 VDC / 1.25 Amps
<b>DR-75-48</b>	75 Watt Industrial Single Output DIN Rail Power Supply – 48 VDC / 1.6 Amps
<b>MDR-20-24</b>	20 Watt Industrial Single Output DIN Rail Power Supply – 24 VDC / 1.00 Amp
<b>MDR-40-48</b>	40 Watt Industrial Single Output DIN Rail Power Supply – 48 VDC / 0.83 Amps
<b>MDR-60-48</b>	60 Watt Industrial Single Output DIN Rail Power Supply – 48 VDC / 1.25 Amps

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660