





**Intel® Atom™ Processor E3900 Series
COM Express® Mini**



AL9A2

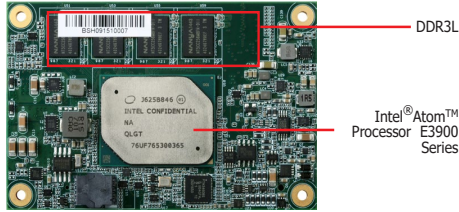

TOP




BOTTOM

Features


- Single Channel DDR3L 1600MHz Memory Down to 8GB
- 1 LVDS/eDP, 1 DDI (HDMI/DVI/DP)
Supports dual displays: DDI + LVDS/eDP
- DP++ resolution supports up to 4096x2160 @ 60Hz
- Multiple expansions: 4 PCIe x1
- Rich I/O: 1 Intel GbE, 2 USB 3.0, 8 USB 2.0



Mechanical Drawing

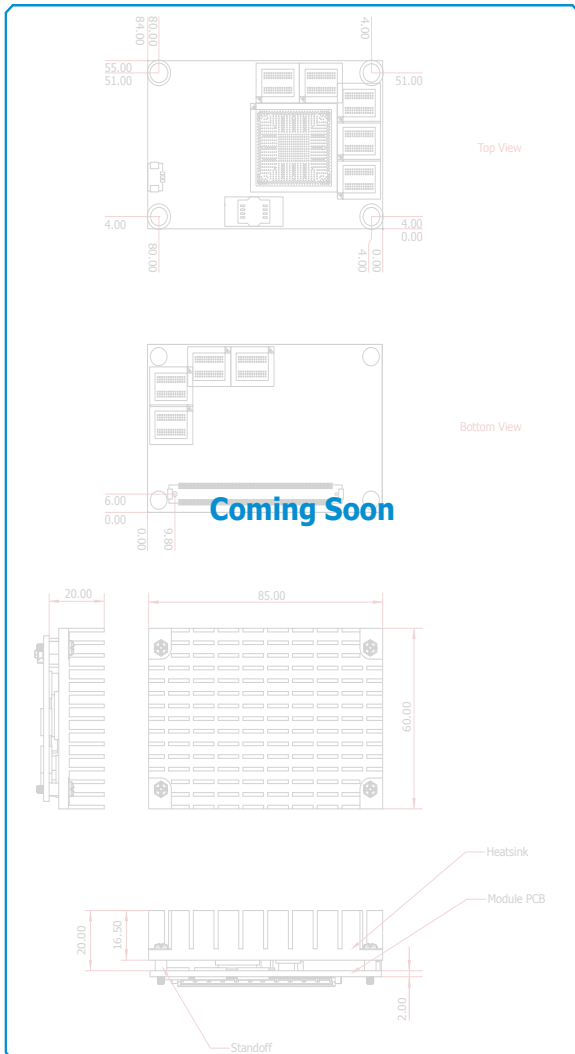

Block Diagram

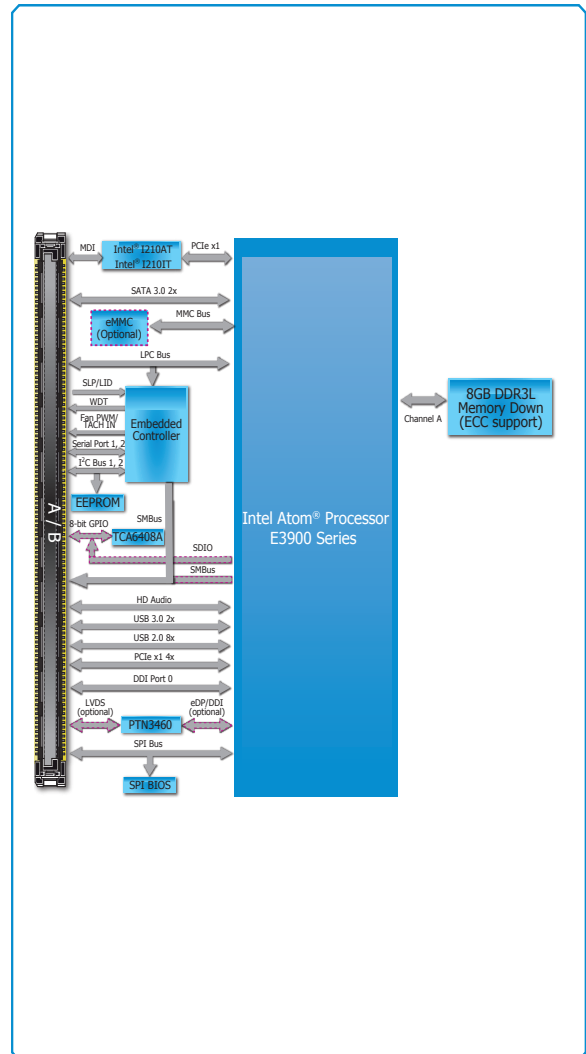



Specifications

SYSTEM	Processor	Intel® Atom™ Processor E3900 Series, BGA 1296 Intel® Atom™ x7-E3950 Processor, Quad Core, 2M Cache, 1.6GHz (2.0GHz), 12W Intel® Atom™ x5-E3940 Processor, Quad Core, 2M Cache, 1.6GHz (1.8GHz), 9.5W Intel® Atom™ x5-E3930 Processor, Dual Core, 2M Cache, 1.3GHz (1.8GHz), 6.5W Intel® Pentium® Processor N4200, Quad Core, 2M Cache, 1.1GHz (2.5GHz), 6W (without ECC function) Intel® Celeron® Processor N3350, Dual Core, 2M Cache, 1.1GHz (2.4GHz), 6W (without ECC function)	
	Memory	4GB/8GB DDR3L Memory Down	Single Channel DDR3L 1600MHz (ECC support only for 8GB)
	BIOS	AMI SPI 128Mbit (supports UEFI boot only)	
GRAPHICS	Controller	Intel® HD Graphics	
	Feature	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1, WMV9, JPEG/MJPEG, HEVC/H.265, VP8, VP9, MVC HW Encode: AVC/H.264, JPEG/MJPEG, HEVC/H.265, VP8, VP9, MVC	
	Display	1 x DDI (HDMI/DVI/DP) 1 x LVDS/eDP	LVDS: single channel 24-bit, resolution up to 1366x768 @ 60Hz HDMI: resolution up to 3840 x 2160 @ 30Hz DP++: resolution up to 4096x2160 @ 60Hz eDP: resolution up to 3840x2160 @ 60Hz
EXPANSION	Dual Display	DDI + LVDS	DDI + eDP
	Interface	4 x PCIe x1 (Gen 2) 1 x SDIO (available upon request) 1 x LPC 2 x I ² C 1 x SMBus 1 x SPI 2 x UART (TX/RX)	
AUDIO	Interface	HD Audio	
ETHERNET	Controller	1 x Intel® I210AT (10/100/1000Mbps) (0°C to 60°C) 1 x Intel® I210IT (10/100/1000Mbps) (-40°C to 85°C)	
I/O	USB	2 x USB 3.0 8 x USB 2.0	
	SATA	2 x SATA 3.0 (up to 6Gb/s)	
	eMMC	1 x 8GB/16GB/32GB/64GB eMMC (available upon request)	
	GPIO	1 x 8-bit GPIO	
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	
POWER	Type	4.75V~20V, 5VSB, VCC_RTC (ATX mode)	4.75V~20V, VCC_RTC (AT mode)
	Consumption	Typical: E3950: 12V @ 0.44A (5.28W) Max.: E3950: 12V @ 1.89A (22.68W)	
OS SUPPORT (UEFI ONLY)		Windows 10 IoT Enterprise 64-bit	Fedora 24 (Intel® graphic driver available) Ubuntu 15.10 (Intel® graphic driver available) Yocto Project v2.0
ENVIRONMENT	Temperature	Operating: 0 to 60°C -40 to 85°C	Storage: -40 to 85°C
	Humidity	Operating: 5 to 90% RH	Storage: 5 to 90% RH
	MTBF	TBD	
MECHANICAL	Dimensions	COM Express® Mini	84mm (3.30") x 55mm (2.16")
	Compliance	PICMG COM Express® R2.1, Type 10	

Ordering Information

Model Name	P/N	Processor	Memory	eMMC	DIO/SDIO	LVDS/eDP	GbE	USB 3.0	USB 2.0	Power	Thermal	Temp.
AL9A2-T80-E3940	770-AL9A21-000G	E3940	8 GB ECC	N/A	DIO	LVDS	1	2	8	ATX/AT	Fanless	-40 to 85°C
AL9A2-B80-E3950	770-AL9A21-100G	E3950	8 GB ECC	N/A	DIO	LVDS	1	2	8	ATX/AT	Fanless	0 to 60°C
AL9A2-T40-E3930	770-AL9A21-200G	E3930	4 GB / non-ECC	N/A	DIO	LVDS	1	2	8	ATX/AT	Fanless	-40 to 85°C
AL9A2-B40-N4200	770-AL9A21-300G	N4200	4 GB / non-ECC	N/A	DIO	LVDS	1	2	8	ATX/AT	Fanless	0 to 60°C

Note: N4200 is supported upon request with MOQ requirement.

Packing List

- 1 AL9A2 board
- 1 DVD
- 1 Heat sink: TBD

Optional Items

- COM100-B carrier board kit: 770-COM102-000G
- Heat spreader: A71-808304-000G (E Series)
A71-808305-000G (N Series)

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660