

# IMP-C100-XX Series

Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter with SC/ST Connector



## Features


- ▶ 1\*10/100Tx Fast Ethernet with IEEE 802.3at Compliant PoE+
- ▶ 1\*100Fx SC/ST Connector (Multi / Single-Mode)
- ▶ RJ45 Port Support Auto MDI / MDI-X Function
- ▶ Auto Negotiation Speed, Half / Full Duplex
- ▶ Store-and-Forward Switching Architecture
- ▶ Built-in Link Fault Pass Through (LFP)
- ▶ Built-in Far End Fault (FEF)
- ▶ Wide-Range Redundant Power Design
- ▶ Redundant Power Input: 48~55VDC
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty

## INTRODUCTION

**Antaira Technologies' IMP-C100-XX series** is a compact IP30 rated Ethernet-to-fiber media converter featuring a 10/100TX Ethernet port that supports IEEE 802.3at high power PoE that can supply up to 30 watts, and a fixed fiber interface supporting ST and SC connectors depending on the model. There are Multi-Mode and Single-Mode models to support applications with a variety of fiber distances and types. It is designed to fulfill industrial applications that require fiber optic distance extension while using minimal space.

The IMP-C100-XX series has a built-in "Link Fault Pass Through" (LFP) and "Far End Fault" (FEF) function with 48~55VDC redundant power inputs with reverse polarity and overload current protection. This product series supports DIN-Rail as well as wall mountable orientations and provides two operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 80°C.

## DIMENSIONS

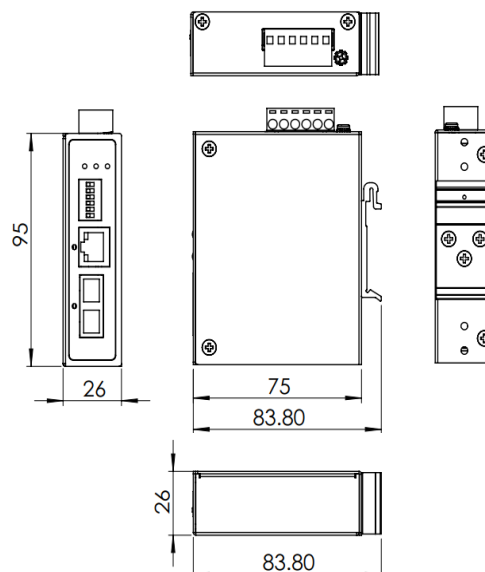

## SPECIFICATIONS

<b>Technology</b>		<b>Power Requirement</b>	
<b>Standards</b>	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3af/at Power Over Ethernet	<b>Input Voltage</b>	48 to 55VDC, Redundant Inputs
<b>Processing Type</b>	Store and Forward	<b>Power Connection</b>	1 removable 6-contact terminal block
<b>Protocol</b>	CSMA/CD	<b>Reverse Polarity Protection</b>	Present
<b>Flow Control</b>	IEEE 802.3x back pressure flow control	<b>Overload Current Protection</b>	Present
<b>Switch Properties</b>		<b>Power Consumption</b>	2.4Watts for System
<b>Memory Buffer</b>	128kbits	<b>Max. PoE Power Budget</b>	30Watts
<b>Interface</b>		<b>Relay Contact</b>	24VDC, 1A resistive
<b>Ethernet Port</b>	1*RJ45 Port w/10/100T(X), auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	<b>Environmental Limits</b>	
<b>Fiber Port</b>	1*100Fx SC/ST type connector Multi-mode: 50/125um or 62.5/125um Single-mode: 9/125um or 10/125um	<b>Operating Temperature</b>	STD: -10°C to 70°C EOT: -40°C to 80°C
<b>Fiber Wavelength</b>	Depends on fixed fiber modules	<b>Storage Temperature</b>	-40°C to 85°C
<b>LED Indicators</b>	Power 1, Power 2, Fault: On / Off Fiber Port: Link / Act Ethernet Port: Link / Act PoE: On-connected to PD devices	<b>Ambient Relative Humidity</b>	5% to 95%, (non-condensing)
<b>Mechanical Characteristics</b>		<b>Regulatory Approvals</b>	
<b>Housing</b>	Metal, IP30 protection	<b>EMI</b>	FCC Part 15 Subpart B Class A, CE EN 55032 Class A, EN 61000-6-4 Class A
<b>Dimensions</b>	26 x 95 x 75 mm (W x H x D)	<b>EMS</b>	CE EN 55024 Class A, EN 61000-6-2 Class A, IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
<b>Weight</b>	Unit: 0.661 lbs. Shipping: 0.903 lbs.	<b>Free Fall</b>	IEC60068-2-32
<b>Mounting</b>	DIN-Rail Mounting, Wall Mounting	<b>Shock</b>	IEC60068-2-27
		<b>Vibration</b>	IEC60068-2-6
		<b>Green</b>	RoHS Compliant
		<b>Certifications</b>	FCC, CE, UL 61010-1 (Pending), UL 61010-2-201 (Pending)
		<b>Warranty</b>	5 Years

## ORDERING INFO

<b>IMP-C100-M</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Multi-Mode, 2KM, SC Connector
<b>IMP-C100-M-T</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Multi-Mode, 2KM, SC Connector; EOT: -40°C to 80°C
<b>IMP-C100-S3</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Single-Mode, 30KM, SC Connector
<b>IMP-C100-S3-T</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Single-Mode, 30KM, SC Connector; EOT: -40°C to 80°C
<b>IMP-C100-ST-M</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Multi-Mode, 2KM, ST Connector
<b>IMP-C100-ST-M-T</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Multi-Mode, 2KM, ST Connector; EOT: -40°C to 80°C
<b>IMP-C100-ST-S3</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Single-Mode, 30KM, ST Connector
<b>IMP-C100-ST-S3-T</b>	Compact 10/100Tx to 100Fx Industrial PoE+ Media Converter, Single-Mode, 30KM, ST Connector; EOT: -40°C to 80°C

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660