



USB3C-104-HUB Rugged USB3 Gen2 5-Port A&C HUB

FEATURES

- 5-port USB 3.1 Gen 2 hub with data transfers up to 10Gbps
- USB C with PD 3.0 upstream connection to host computer
- One downstream USB Type C with PD 3.0 at up to 20V @ 5A
- Two USB Type C and two Type A downstream ports with Battery Charging v1.2 and Apple Charging standards (up to 2.8A per port)
- IEC 61000-4 Level 4 ESD, EFT and Surge Protection on all USB data lines
- Rugged, industrial grade (-40°C to 85°C) operation
- Locking upstream, downstream, and power connectors prevent accidental disconnects
- SuperSpeed+ (10Gbps), SuperSpeed (5Gbps), Hi-Speed (480Mbps), Full-Speed (12Mbps), and Low-Speed (1.5Mbps) transfers supported on all ports
- Requires 24V power via DC power jack and a pair of screw terminals
- Compact, steel, low-profile enclosure
- RoHS compliant



FACTORY OPTIONS

- OEM (board only) option with PC/104 mounting holes and footprint for convenience in embedded applications
- Economy version equipped with standard, instead of locking connectors
- Tantalum capacitors for flight and space based applications
- Conformal coating

FUNCTIONAL DESCRIPTION

The USB3C-104-HUB is an industrial-grade 5-port USB hub optimized for harsh and rugged environments. This hub has latching / locking connectors on upstream and downstream ports as well as power, preventing accidental disconnects - making it perfect for applications that require vibration proofing. The rugged steel enclosure, positive retention connections, and -40°C to +85°C operation makes the USB3C-104-HUB stand out compared to commercially available hubs — and it's 100% Made in the USA.

Each connection has been designed for rugged use without loose or intermittent cables disrupting your application. The input power is secured via screw terminal or threaded DC Jack. Type C connections utilize USB-standard latching cables. The latching Type A ports' connectors provide high-retention (50N) downstream connections compatible with all industry-standard USB cables.

In addition to secure retention connectors signal integrity is further protected by IEC 61000-4-2 maximum-rated ESD protection diodes (15kV Contact & Air-gap).


The board is designed to be used in rugged industrial environments, but is small enough to fit nicely onto any desk or testing station. The module is PC/104 sized at 3.550" by 3.775", while the enclosure is approximately 4" x 4" x 1".

ACCESSORIES

Available accessories include the MP104-DIN for DIN rail mounting the USB3C-104-HUB and an external instrument grade power supply.

SOFTWARE

No software is provided or needed with this board. There is no need to install any drivers to use the USB3C-104-HUB. It will enumerate as a Generic Hub which uses the USB Hub Class Driver that is built in Windows OS or Linux, et al.

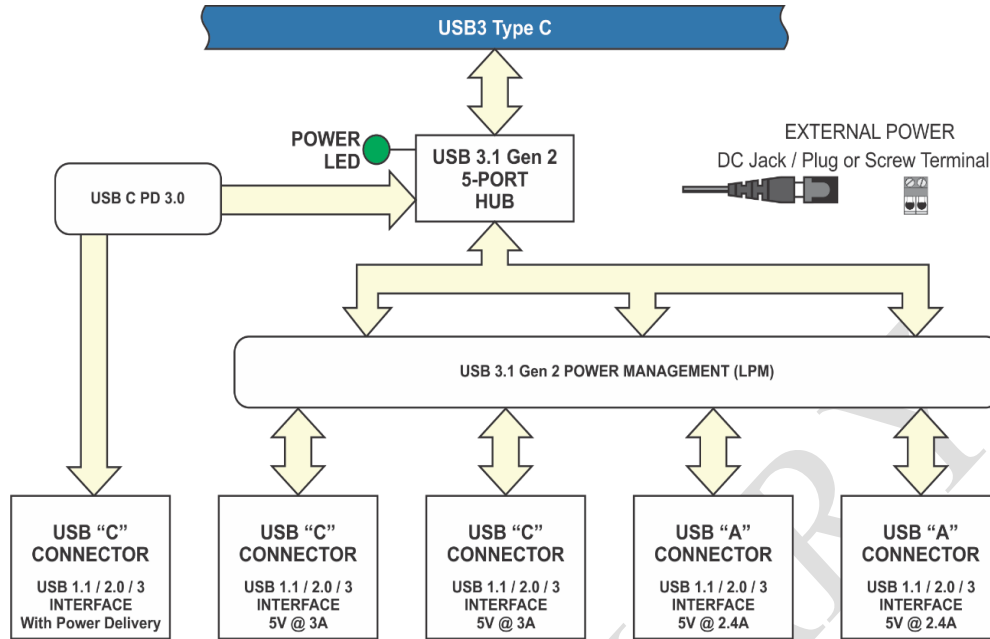

BLOCK DIAGRAM

SPECIFICATIONS

Bus Type: USB 3.1 Gen 2
SS+, SS, HS, FS, and LS supported on all ports
One Type C upstream port with PD3.0
One downstream Type C with PD3.0
Two Type C downstream
Two Type A downstream ports

Environmental

Operating & Storage: -40° to +85°C
Humidity: 5-95% non-condensing
Board Size: 3.550" x 3.775"
Enclosure Size: 3.985" x 3.990" x 1.045"
Weight: 284 grams (with enclosure)
65.8 grams (-OEM version)

Cable Power

Power Delivery
6' USB3 cable Type C with latch
Connect via screw terminals, a locking DC jack / plug or standard jack / plug
One upstream and one downstream type C port support the full PD3.0 standards of 20V, 15V, 9V, and 5V power at up to 5A
Two downstream Type C support 3A
Two downstream Type A support USB Battery Charging v1.2 and Apple Charging standards (2.4A)

Connectors

USB Type A Latching Retention up to 50 Newtons
Physical shock: Per EIA-364-27 Condition H (11ms 30G)
Vibration: Per EIA-364-28D Condition V, Test A
USB Type A 8 Newtons disconnect non-locking
DC Jack (locking) (MIL-STD-202G) Vibration: Method 201A
Ins. Resistance: Method 302 ConditionB
Thermal Shock: Method 107G

Temperature: -40-105°C (-40-+221°F)
DC Jack (non-locking) 2.22 Newtons disconnect
USB Type C 8 Newtons disconnect non-latching cable

Ordering Guide

USB3C-104-HUB RoHS compliant industrial USB 3.1 Gen 2 hub with locking/latching connectors in rugged enclosure (includes 6' high-quality USB 3.1 Type C latching cable)
USB3C-104-HUB-E Economy version with standard non-latching power and data connections (includes 6' high-quality USB 3.1 Type C cable)

Model Options

-OEM Board only version (no enclosure)
-TAN Tantalum Capacitors instead of Electrolytic for high altitude usage
-CC Conformal Coating for use in high humidity and dusty environments

Optional Accessories

MP104-DIN DIN rail mounting provision



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660