

LMP-0702G-SFP-V2 Series

7-Port Industrial Gigabit PoE+ Light Layer 3 Managed Ethernet Switch, w/4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx, and 2*100/1000 SFP Slots; Version 2 Hardware



Features


- ▶ Supports 4*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port, 1*10/100/1000Tx RJ45 Port, and 2*100/1000 SFP Slots
- ▶ Network Redundancy Support: RSTP/MSTP, and G.8032 ERPS v1/v2 (Recovery Time <50ms)
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ Supports IGMP v1/v2/v3, up to 1024 Groups
- ▶ Supports QoS (IEEE802.1p) and CoS/ToS
- ▶ Supports IEEE802.1Q VLAN, SNMP v1/v2c/v3
- ▶ Power Input: 48~55VDC in 6-Pin Terminal Block
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ Operating Temperature Range
 - STD: -10° to 65°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMP-0702G-SFP-V2 series is a 7-port industrial Gigabit PoE+ managed Ethernet switch embedded with 4*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, 1*10/100/1000Tx Gigabit Ethernet port, and 2*100/1000 dual rate SFP slots for fiber connection. The LMP-0702G-SFP-V2 series is a fully manageable Light Layer 3 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 Ethernet Ring Protection Switch (ERPS) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-0702G-SFP-V2 series is IP30 rated and DIN-rail mountable. There are also two wide-operating temperature models for either a standard temperature range (STD: -10°C to 65°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

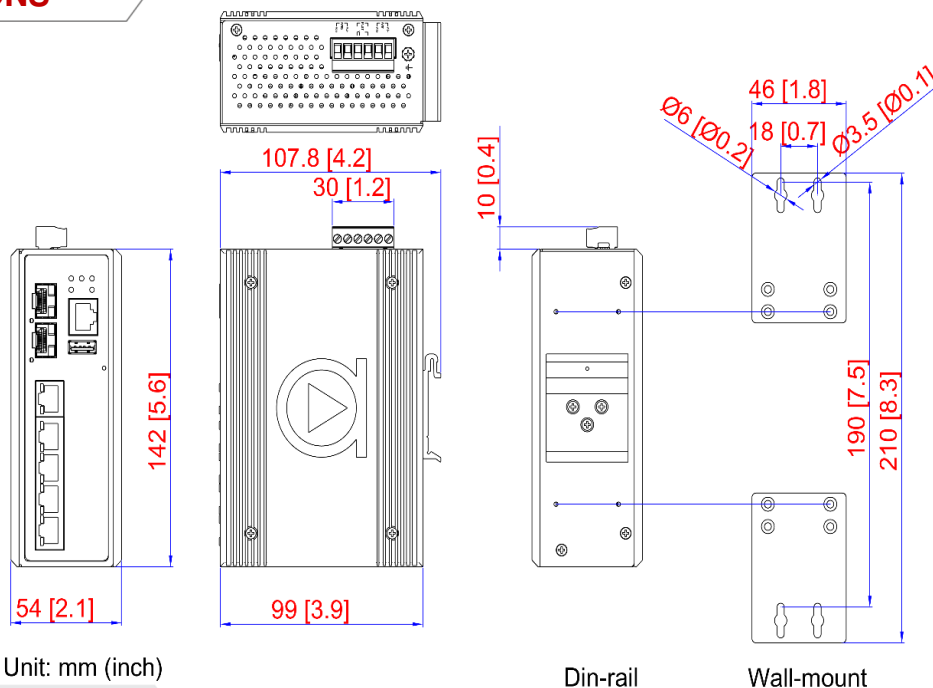

SPECIFICATIONS

Technology		Protection	
L2 Switching	Port/MAC/Protocol/IP Subnet-based VLAN, VLAN trunking, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP v1/v2/v3 snooping, MLD snooping, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, ARP, MEP, G.8032 v1/v2, NAT, DHCP per port, SMTP, Quick ERPS, TLS	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000Base-T: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
L3 Switching	DHCP option82, static routes	Mechanical Characteristics	
QoS	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode	Housing	Metal, IP30 protection
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az EEE power management	Dimensions	54 x 142 x 99 mm (W x H x D)
Network Redundancy	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)	Weight	Unit: 2.09 lbs Shipping: 2.75 lbs
Configuration System / Diagnostics	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3	Mounting	DIN-Rail, Wall Mounting
Switch Properties		Power Requirement	
Back-Plane (Switching Fabric)	14Gbps	Input Voltage	48~55VDC Redundant Input
Priority Queues	8	Power Connection	1 removable 6-contact terminal block
Processing Type	Store and Forward	Relay Contact	24VDC, 1A resistive
Flow Control	IEEE 802.3x flow control, back pressure flow control	Overload Current Protection	Present
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port	Reverse Polarity Protection	Present
Memory Buffer	4Mbits	PoE Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, Mode A)
Jumbo Frame	9.6Kbytes	PoE Power Budget	Max. 120W @48~55VDC
MAC Table Size	8K	System Power Consumption	7.5W
VLAN Group	4095	Environmental Limits	
IGMP Group	1024	Operating Temperature	STD: -10°C to 65°C EOT: -40°C to 75°C
Port Interface		Storage Temperature	-40°C to 85°C
Ethernet Port	5*10/100/1000Base-TX (30W/Port for Port 1~4 only), auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	Ambient Relative Humidity	5% to 95%, (non-condensing)
SFP Port	2*100/1000 SFP Slots	Regulatory Approvals	
RS232 Serial Console	1*RS232 in RJ45	EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault Ethernet Ports: Speed/Link/Active SFP: Link/Active	EMS	CE EN55035/EN61000-6-2 IEC61000-4-2,3,4,5,6,8
		Free Fall	IEC60068-2-32
		Shock	IEC60068-2-27
		Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, 61010-2-201
		Warranty	5 Years

ORDERING INFO

LMP-0702G-SFP-V2	7-Port Industrial Gigabit PoE+ Light Layer 3 Managed Ethernet Switch, w/4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx, and 2*100/1000 SFP Slots; Version 2 Hardware
LMP-0702G-SFP-T-V2	7-Port Industrial Gigabit PoE+ Light Layer 3 Managed Ethernet Switch, w/4*10/100/1000Tx (30W/Port), 1*10/100/1000Tx, and 2*100/1000 SFP Slots; EOT: -40°C to 75°C; Version 2 Hardware

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660