

LNX-0702C-SFP Series

7-Port Industrial Unmanaged Ethernet Switch, with 5*10/100Tx and 2*100/1000 SFP Slots



Features


- ▶ Supports 5*10/100Tx Ethernet Ports and 2*100/1000 SFP Slots
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 5Gbps Back-Plane (Switching Fabric)
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range:
STD: -10°C to 70°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNX-0702C-SFP series is a 7-port industrial unmanaged Ethernet switch embedded with 5*10/100Tx Ethernet ports and 2*100/1000 dual rate SFP slots for fiber connection.

The LNX-0702C-SFP series has been specifically designed for rugged and harsh environmental deployments. This product series is housed in a hardened IP30 rated metal enclosure that includes DIN-rail and wall mounting hardware. There are two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C).

DIMENSIONS

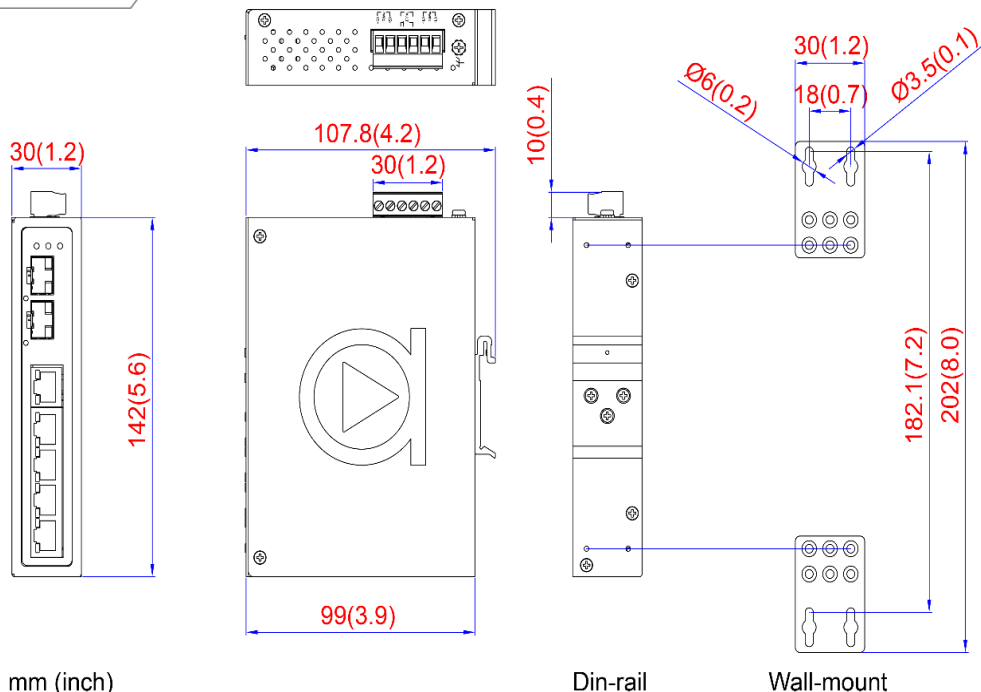

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet IEEE 802.3z Gigabit Fiber
Switch Properties	
Switch Architecture	Switching Fabric (Back-Plane): 5Gbps
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Protocol	CSMA/CD
Transfer Rate	14,880pps for Ethernet 148,800pps for Fast Ethernet
MAC Table Size	8K
Jumbo Frame	9.6Kbytes
Memory Buffer	4Mbits
Port Interface	
Ethernet Port	5*10/100BaseTx Auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
SFP Port	2*100/1000 SFP Slots System: Power 1, Power 2, Fault
LED Indicators	Ethernet Ports: Speed/Link/Active SFP: Link/Active
Network Cable	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)

Mechanical Characteristics	
Housing	Metal, IP30 rated
Dimension	30 x 142 x 99 mm (W x H x D)
Weight	Unit: 1.26 lbs; Shipping: 1.59 lbs
Mounting	DIN-Rail mounting, Wall mounting
Power Requirement	
Input Voltage	12~48VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
Overload Current Protection	Present (Slow-Blown Fuse)
Reverse Polarity Protection	Present
System Power Consumption	8W
Relay Contact	24VDC, 1A resistive
Environmental Limits	
Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 75°C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A, CE EN55022/EN61000-6-4 Class A
EMS	CE EN55024/EN61000-6-2: EN61000-4-2,3,4,5,6,8
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 61010-1, UL 61010-2-201, UL Class 1 Division 2, ISA 12.12.01
Warranty	5 Years

ORDERING INFO

LNX-0702C-SFP	7-Port Industrial Unmanaged Ethernet Switch, with 5*10/100Tx and 2*100/1000 SFP Slots
LNX-0702C-SFP-T	7-Port Industrial Unmanaged Ethernet Switch, with 5*10/100Tx and 2*100/1000 SFP Slots; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660