

LMX-1002G-SFP Series

Features

10-Port Industrial Gigabit Managed Ethernet Switch, with 8*10/100/1000Tx and 2*100/1000 SFP Slots




- ▶ Supports 8*10/100/1000Tx Gigabit Ethernet Ports and 2*100/1000 Dual Rate SFP Slots for Fiber Connection
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Support RMON Function for Efficient Network Monitoring
- ▶ Support Port Mirroring for Online Diagnostic
- ▶ 5-Year Warranty

INTRODUCTION

Antaira's LMX-1002G-SFP series is a 10-port industrial gigabit managed Ethernet switch that is embedded with eight gigabit Ethernet ports and two dual rate (100/1000) SFP slots for fiber connection. It supports Jumbo Frame up to 9.6K for huge Ethernet data packet transmissions. It is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-1002G-SFP series is a compact, IP30 rated, and DIN-rail or wall mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

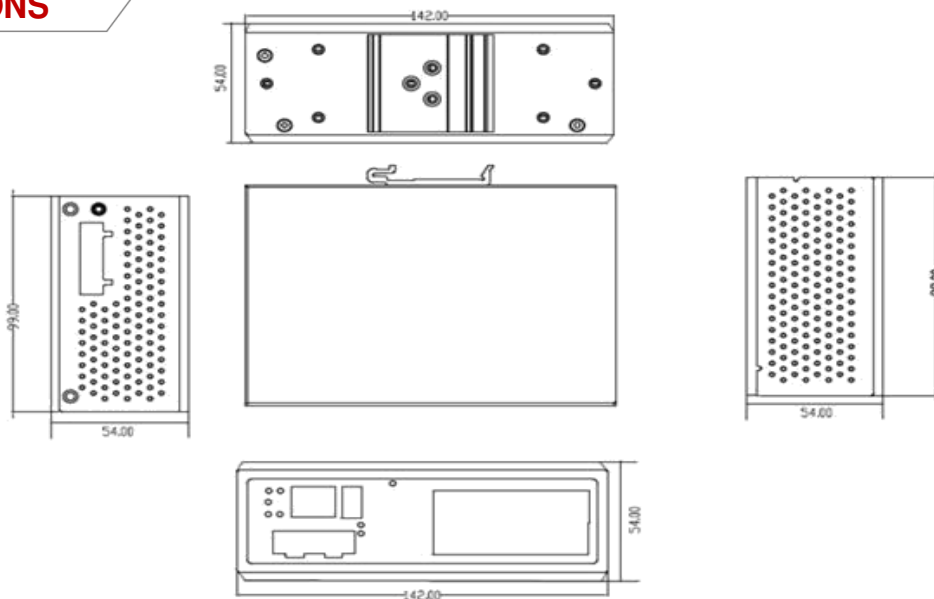

SPECIFICATIONS

Technology		IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol)	Protection	
Standards		IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	Overload Current	Present
Protocol		IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS	Power Reverse Polarity	Present
Switch Properties			CPU Watchdog	Present
Switch Architecture	Back-Plane (Switching Fabric): 20.0Gbps		Network Cable	
Configuration	Web Console, Telnet, CLI		10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)	
Processing Type	Store and Forward		Mechanical Characteristics	
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode		LED Indicator	Per Unit: Power 1 & 2 (Green), Fault (Red)
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet		Housing	Metal IP30 rated
Packet Buffer	4 Mbits		Dimension	54 x 142 x 99 mm
Jumbo Frame	9.6K		Weight	Unit: 2.2 lbs.; Shipping: 3.0 lbs.
MAC Table Size	8K		Mounting	DIN-Rail; Wall-Mount (optional)
VLAN Group	1 ~ 4094		Power Requirement	
IGMP Group	Up to 256 Groups		Input Voltage	12~48VDC Redundant Input
Port Interface			Power Connection	1 removable 6-contact terminal block
Ethernet RJ45 Port	8*10/100/1000BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection		Power Consumption	15 Watts
Fiber Port	2* 100/1000 SFP Slot		Environmental Limits	
Wavelength	Refer to SFP Modules		Operating Temperature	STD: -10 to 70°C EOT: -40 to 75°C
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1		Storage Temperature	-40°C ~ 85°C
Configuration Backup	1*USB 2.0		Ambient Relative Humidity	5 to 95%, (non-condensing)
			Regulatory Approvals	
			EMI	FCC Class A
			EMS	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4
			Free Fall	IEC60068-2-32
			Shock	IEC60068-2-27
			Vibration	IEC60068-2-6
			Green	RoHS Compliant
			Certifications	
			FCC, CE, ATEX UL 61010-1, 61010-2-201 Class 1 Division 2 NEMA TS2	
			Warranty	5 Years

ORDERING INFO

LMX-1002G-SFP	10-Port Industrial Gigabit Managed Ethernet Switch with 8*10/100/1000Tx + 2*100/1000 SFP Slots
LMX-1002G-SFP-T	10-Port Industrial Gigabit Managed Ethernet Switch with 8*10/100/1000Tx + 2*100/1000 SFP Slots; EOT -40° to 75°C
Optional Accessories	
MDR-40-48	40W Industrial Din Rail Power Supply (48VDC)
MDR-60-48	60W Industrial Din Rail Power Supply (48VDC)
DR-75-48	75W Industrial Din Rail Power Supply (48VDC)
DR-120-48	120W Industrial Din Rail Power Supply (48VDC)
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
DIN-RACK-2U	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660