


TPM-3315

Arestech

IP65 Protected 15" Stainless Steel Industrial Monitor with P-Cap Touchscreen

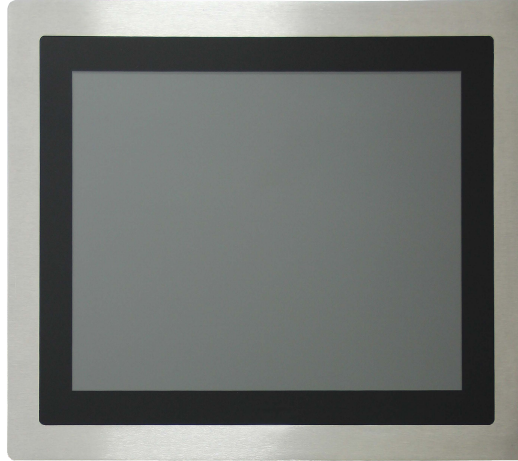

Features

- IP65 Protected Stainless steel Flat Panel Design
- 15" XGA LCD Panel up to 1024 x 768 Resolution
- Projected Capacitive Touch Technology
- 12-24 V DC Power Input with Terminal Block
- USB Touch Interfaces
- -20~60° C Operating Temperature
- Panel and VESA Mounting

Applications

- Embedded HMI Display System
- Factory Manufacturing Automation
- ATM Self-service Kiosk Applications
- Vending Machine
- Ticketing Machines

→ Packing List

Description
1 x TPM-3315
1 x Driver CD
1 x USB Cable
1 x VGA Cable
1 x Power Adapter
12 x Panel Mounting Screws

→ Optional Items

Part No.	Description
ACS-PS-US	Power Cable 3-pin, 180 cm, USA Type
ACS-PS-EU	Power Cable 3-pin, 180 cm, Euro Type
ACS-PS-CN	Power Cable 3-pin, 180 cm, China Type
ACS-100-STD	LCD VESA Table Stand


→ Ordering Information

Part No.	Description
TPM-3315P-A1	15" XGA, IP65 Stainless Flat Panel, Projected Capacitive Multi-touch Display

TPM-3315

Arestech

→ Dimensions

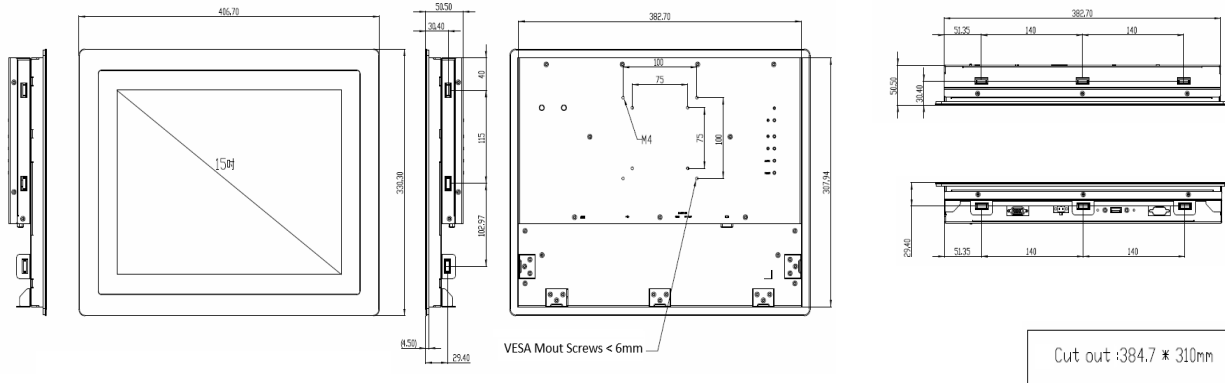

→ Specifications

	Model	TPM-3315P
Display	Panel Size	15" LCD Panel
	Resolution	1024 x 768 (XGA)
	Viewing Angle	80 x 80 (H) x 80 x 80 (V)
	Brightness	300 (cd/m ²)
	Color Support	16.7 M
	Contrast Ratio	600 : 1
	Response Time	8 (msec)
Touchscreen	Type	Projected Capacitive
	Surface Hardness	7 Mohs
	Durability	-
	Transparency	90% (±3%)
I/O Interface	Video Interface	1 VGA
	Touch Interface	Projected Capacitive (for USB only)
OSD Control	Function Key	5 Keys: Menu, Up, Down, Auto Adjust, Monitor Power on/off Menu Functions: Brightness, Contrast, Color Adjust, Color Temp, Auto Color, Language
Power	Power Connector	Phoenix Terminal Block, 2 pins
	Power Input	12-24 V DC power input, single power source
	Power Consumption (Typical)	10.1 W
Environment	Operating Temperature	-20~60° C (-4~140° F)
	Storage Temperature	-30~70° C (-22~158° F)
	Humidity	5~95% @ 40° C, Non-condensing
	Vibration	5-500 Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
General	Ingress Protection	IP65
	Dimensions (W x H x D)	406.7 x 330.3 x 50.5 mm (16.01" x 13.00" x 1.99")
	Weight	5.08 kg (11.2 lb)
	Operating System	Windows 7/8.1/10, WES7, WE8S, Linux Fedora, Ubuntu

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660