

GPU Computing



# Nuvo-7164GC Series

Ruggedized AI Inference Platform Supporting nVidia® Tesla P4/ T4 and Intel® 8th-Gen Core™ Processor



CE FC

## Key Features

- Supports nVidia® Tesla P4/ T4 GPU
- Dedicated heat dissipation for -25°C to 60°C wide-temperature operation
- Intel® 8th-Gen Core™ hexa-core 35W/ 65W LGA1151 CPU
- 6x GigE ports, 802.3at PoE+ option available (ports 3~6)
- M.2 2280 M key NVMe (Gen3 x4) socket for fast storage access
- 4x USB 3.1 Gen2 ports and 4x USB 3.1 Gen1 ports
- Accommodates two 2.5" SATA HDD/SSD with RAID 0/1 support
- MezzIO™ interface for easy function expansion

## Introduction

Nuvo-7164GC is a rugged AI inference platform designed for advanced inference acceleration applications such as voice, video, image and recommendation services. It supports nVidia® Tesla P4 GPU, featuring 5.5 TFLOPS in FP32 and Tesla T4 GPU, featuring 8.1 TFLOPS in FP32 and 130 TOPs in INT8 for real-time inference based on trained neural network model. In addition, it supports Intel® 8th-Gen Coffee Lake Core™ 6-core/12-thread CPU and 32 GB DDR4-2666, offering great balance between CPU, GPU and memory performance.

Thanks to Neosys' patented Cassette and air tunnel design, which guides the intake air to flow through the passive heat sink of nVidia® Tesla P4/ T4, Nuvo-7164GC is capable of effectively dissipating the heat generated by the GPU. This promising design guarantees system operation of up to 60°C ambient temperature with sustained 100% GPU loading.

Nuvo-7164GC also incorporates cutting-edge I/O technologies to boost overall system flexibility, functionality and performance. It has an M.2 NVMe interface that supports disk read/ write speeds over 2000 MB/s and USB 3.1/ GbE ports for fast data transfer, such as acquiring HD video data. With the combination of a fast CPU and inference accelerator GPU, Nuvo-7164GC is the ideal inference platform for artificial intelligence applications.

## Specifications

System Core		Internal Expansion Bus	
<b>Processor</b>	Supporting Intel® 8th-Gen Coffee Lake CPU (LGA1151 socket, 65W/ 35W TDP) - Intel® Core™ i7-8700/ i7-8700T - Intel® Core™ i5-8500/ i5-8500T - Intel® Core™ i3-8100/ i3-8100T	<b>PCI/PCI Express</b>	1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette for installing nVidia® Tesla P4/T4 GPU
<b>Chipset</b>	Intel® Q370 platform controller hub	<b>Mini PCI Express</b>	1x full-size mini PCI Express socket with internal SIM socket (mux with mSATA)
<b>Graphics</b>	Integrated Intel® UHD graphics 630	<b>M.2</b>	1x M.2 2242 B key socket with dual front-accessible SIM sockets, supporting dual SIM mode with selected M.2 LTE module
<b>Memory</b>	Up to 32 GB DDR4 2666/ 2400 SDRAM (two SODIMM slots)	<b>Expandable I/O</b>	1x MezzIO™ expansion port for Neosys MezzIO™ modules
<b>AMT</b>	Supports AMT 12.0	<b>Power Supply</b>	
<b>TPM</b>	Supports TPM 2.0	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8~35VDC DC input
<b>I/O Interface</b>		<b>Remote Ctrl. &amp; LED Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output
<b>Ethernet</b>	6x Gigabit Ethernet ports by I219 and 5x I210	<b>Mechanical</b>	
<b>PoE+</b>	Optional IEEE 802.3at PoE+ PSE for port 3 ~ port 6 100 W total power budget	<b>Dimension</b>	240 mm (W) x 225 mm (D) x 111 mm (H)
<b>USB</b>	4x USB 3.1 Gen2 (10 Gbps) ports 4x USB 3.1 Gen1 (5 Gbps) ports	<b>Weight</b>	4.5 Kg (including CPU, GPU, memory and HDD)
<b>Video Port (Integrated Graphics)</b>	1x VGA connector, supporting 1920 x 1200 resolution 1x DVI-D connector, supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution	<b>Mounting</b>	Wall-mount mounting bracket or optional DIN-Rail mounting
<b>Serial Port</b>	2x software-programmable RS-232/422/485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	<b>Environmental</b>	
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out	<b>Operating Temperature</b>	with 35W CPU and nVidia® Tesla P4/ T4 -25°C ~ 60°C *** with 65W CPU and nVidia® Tesla P4/ T4 -25°C ~ 60°C **/ *** (configured as 35W TDP mode) -25°C ~ 50°C **/ *** (configured as 65W TDP mode)
<b>Storage Interface</b>		<b>Storage Temperature</b>	-40°C ~ 85°C
<b>SATA HDD</b>	2x internal SATA ports for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	<b>Humidity</b>	10%~90% , non-condensing
<b>M.2 NVMe</b>	1x M.2 2280 M key NVMe socket (PCIe Gen3 x4) for NVMe SSD installation	<b>Vibration</b>	Operating, MIL-STD-810G, Method 514.6, Category 4
<b>mSATA</b>	1x full-size mSATA port (mux with mini-PCIe)	<b>Shock</b>	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
		<b>EMC</b>	CE/FCC Class A, according to EN 55032 & EN 55024


\*\* For i7-8700 running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.

\*\*\* For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.


Nuvo-7164GC Series



## Appearance

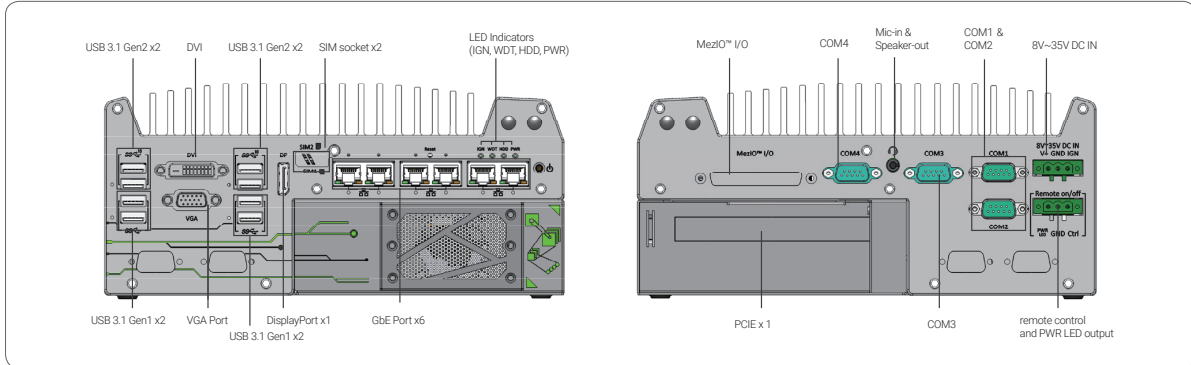

## Dimensions

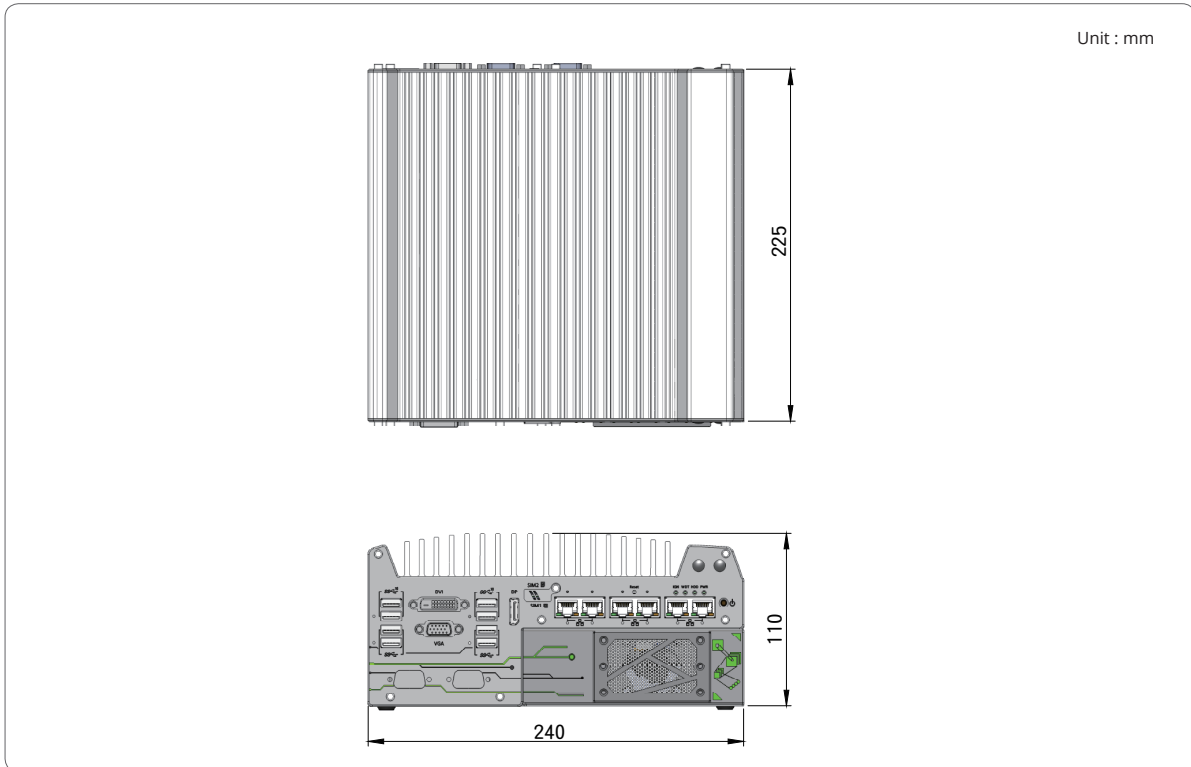

## Ordering Information

Model No.	Product Description
Nuvo-7164GC	Intel® 8th-Gen Core™ AI Inference Platform with 6x GbE and MeziO™, supporting nVidia® Tesla P4/T4 GPU
Nuvo-7164GC-PoE	Intel® 8th-Gen Core™ AI Inference Platform with 2x GbE, 4x 802.3at PoE and MeziO™, supporting nVidia® Tesla P4/T4 GPU

## Optional Accessories

PA-280W-OW	280W AC/DC power adapter 24V/11.67A; 16AWG/100cm; Cord end terminals for terminal block, operating temperature : -30°C to 60°C.
Damping bracket	Neousys' patented damping bracket assembly for Nuvo-7160GC/ Nuvo-7164GC

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660