


AI Vehicle Computer

COMPACT AI Railway Series

Intelligent Machine Learning Unit with NVIDIA Jetson AGX Xavier

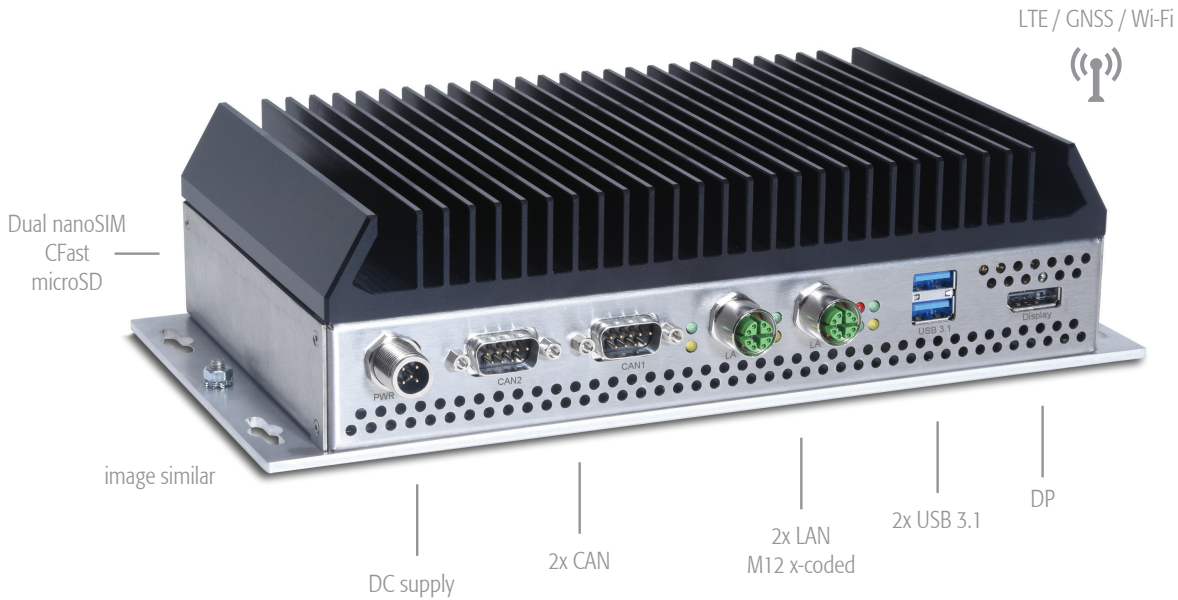

IPC/COMPACT A3 - RSL

This fanless RSL COMPACT-A3 generation is based on the Jetson AGX Xavier processor module and offers a wide range of interface options.

The robust and uncompromising industrial design allows the implementation in the most demanding AI applications and guarantees long term availability.

- 24/7 continuous operation
- Extended AI Computing
- Railway approved product
- Passively cooled, no moving parts
- Long term availability with fixed BOM

 **NVIDIA.** Linux for Tegra (L4T)

Product Highlights

- No moving parts / passively cooled
- Positioning capabilities with dead reckoning
- Power ignition controller
- Long term availability (fixed BOM)
- Maintenance free
- Shock and vibration resistant
- Goldcap instead of battery backup for RTC

Product Features

- 512-Core NVIDIA Volta™ GPU with 64 Tensor Cores
- 8-Core ARM v8.2 64-bit NVIDIA Carmel CPU
- 32GB 256-Bit LPDDR4x RAM soldered on board
- Socket for CFast
- Ethernet, USB, Passive or Active CAN
- LTE, GNSS and WiFi options
- Aluminum & Stainless steel housing

Markets

- Production and Industrial Automation
- Automated Guided Vehicles (AGV)
- Transportation
- Logistics
- Robotics
- Railway (rolling stock)



	Order Code	IPC/RSLA3K22-A101S ¹	IPC/RSLA3K22-C101S ¹
Processor module / Performance			
NVIDIA Jetson AGX Xavier (32GB) 512-Core NVIDIA Volta™ GPU with 64 Tensor Cores		•	•
8-Core ARM v8.2 64-bit NVIDIA Carmel CPU			
AI Performance		32 TOPs	32 TOPs
Memory / Storage			
Data L3 Cache Size		4MB	4MB
256-Bit LPDDR4x RAM soldered on board		32GB	32GB
eMMC 5.1 Flash Storage on board		32GB	32GB
microSD Card socket		1	1
M.2 2280 socket ²		1	1
CFast socket with retention frame ²		1	1
Features			
Inertial measurement unit (IMU) STMicroelectronics ISM330DHCXTR		•	•
Real time clock (RTC) with goldcap backup (charge holds 48h)		•	•
Hardware Watchdog & Temperature supervisor		•	•
Buzzer		•	•
Communication Interfaces			
Graphic interface		DisplayPort 1.2	DisplayPort 1.2
USB version 3.1 (Type A)		2	2
Internal USB version 2.0 OTG <small>behind the cover</small> (micro USB Type AB)		1	1
Ethernet 10/100/1000Mbit (M12 female x-coded)		2	2
Active/passive-CAN ESD protected, isolated (DSUB9)		2	2
Power over Ethernet - IEEE802.3at 10/100/1000Mbit <small>requires taller housing: h105mm</small> (RJ45 / M12 female x-coded)		optional	none
Serial RS232 / RS422/RS485 (DSUB9)		optional	none
Digital I/O's, 24VDC (up to 4 inputs & 4 outputs)		optional	none
Analog input, 16bit resolution, voltage input: -10 ...+10V / 0 ... 30V <small>Accuracy: +/- 0.1%</small> (4 inputs)		optional	none
Analog input, 16bit resolution, current: 0-20mA (4 inputs)		optional	none
I2C bus ²		•	•
MIPI CSI-2 / GMSL2 / FPDLinkIII Camera interface ¹		on request	on request
Wireless Connectivity			
Cellular 4G Module (LTE/UMTS/GSM) Sierra Wireless MC7455- M2M only! (full size miniPCIe Slot)		2x SMA	none
Dual SIM Support (nanoSIM to mPCIe slot)		•	none
Wireless LAN IEEE 802.11a/b/g/n/ac dual-band 2x2 MIMO Sparklan WPEB 263ACNI(BT) (half size MiniPCIe Slot)		2x RP-SMA	none
GNSS Positioning Module (GPS, Galileo, Glonass, Beidou) u-blox NEO-M8U Module incl. acceleration sensor and gyroscope		1x SMA	none
High Accuracy GNSS Positioning Module w/ RTK support u-blox ZED F9P		optional	none
Technical Data			
Dimensions [mm] (housing, incl. mounting plate)		w255 x h63 x d125	w255 x h63 x d125
Net weight [gram]		~2300	~2300
Isolated input voltage with ignition controller and reverse polarity protection (M12 5P male a-coded)		16.8 ... 45VDC	16.8 ... 45VDC
Interruption of voltage supply time: EN50155 Class S2		>10ms	>10ms
Environmental Conditions			
Operating temperature ³		-25°C ... +55°C	-25°C ... +55°C
Storage temperature		-25°C ... +80°C	-25°C ... +80°C
Ingress protection standard according to EN60529		IP20	IP20
Conformal coating ⁴		PCX	PCX
UN/ECE R10 (E-mark) certification		on request	on request
Shock		EN61373 / EN60068-2-27	EN61373 / EN60068-2-27
Vibration		EN61373 / EN60068-2-64	EN60068-2-64 / EN61373
EMI-Conformity		EN50121-3-2	EN50121-3-2
Safety (designed to meet)		EN62368-1	EN62368-1
Fire protection		EN45545-2 HL3	EN45545-2 HL3
Radio and Telecommunication (designed to meet)		RED	RED
MTBF @ 25°C ambient <small>according to Telcordia SR-332, Environment GB, excluding battery</small>		~325 000h	~435 000h

¹ Please contact factory for minimum order quantities

² Internal connector

³ Depending on installation situation and interface connection. Please see user documentation.

⁴ On all possible components (excl. NVIDIA Xavier Module, connectors and wireless devices)

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2020 Syslogic Datentechnik AG
All rights reserved

Syslogic Datentechnik AG
Täferstrasse 28
CH-5405 Baden Dättwil

Version 1.2 | August 2020

For further information and support:

info@syslogic.com
support@syslogic.com
www.syslogic.com

+41 56 200 90 40
+49 7741 9671-420

Switzerland (Headquarters)
Germany and Austria



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660