

Edge AI GPU Computing

ABOX-5200G4

Taiwan Patent No. M565941

Intel Gen 8th 6 Cores i7 CPU w/ 10 x GbE (Optional 8 x PoE) / 3 x COM/ 3 x DP/ 4 x HDMI/ 4 x USB 3.0/ NVIDIA® GeForce GTX 1060 1280 CUDA cores GPU/ DC 9-48V Input AI GPU Computing

Features

- Intel GEN 8th 6 Cores i7-8700T
- NVIDIA® GeForce GTX 1060 GPU
- Support 1280 CUDA Cores
- 8 x GPI and 4 x GPO and 3 x RS-232/422/485
- Dual Hot Swappable SATA Storage RAID 0,1,5
- 9-48V DC Input and Operating Temp.: -40~60°C
- 10 x GbE LAN (Optional for 8 x PoE)



Introduction

The ABOX-5200G4 is powered by Intel Gen 8th 6 Cores i7 CPU with 10 x GbE (Optional 8 x PoE) and NVIDIA GeForce GTX 1060 1280 CUDA cores GPU/ 9-48V AI GPU Computing. It provides high computing performance to accelerate computational workloads. ABOX-5200G4 include the ability to process deep learning operations with NVIDIA CUDA technology and support end-to-end deep learning solutions, which plays a vital role in managing autonomous vehicles and factory automation. Furthermore, it can assist systems in detecting objects, performing basic classification, and alerting drivers.

ABOX-5200G4 can be implemented to autonomous vehicles and mining machine, mining trucks, as well as driving performance monitoring. It provides advanced intelligent assistance to monitor and track the traffic.


Specifications

System	
CPU	Intel Gen8 Core i7-8700T (12M Cache 2.4GHz up to 4.0GHz)
	Intel Gen8 Core i5-8500T (9M Cache 2.1GHz up to 3.5GHz)
	Intel Gen8 Core i3-8100T (6M Cache 3.1GHz)
	Intel Gen8 Celeron G4900T (2M Cache 2.9GHz)
Memory	2 x DDR4 2133 MHz SO-DIMM up to 32GB
LAN Chipset	9 x Intel i210-AT and 1 x i219LM (iAMT9.5 w/ i5, i7 only) Gb/s Ethernet Controllers Onboard Support PXE and WOL
Watchdog	1 ~ 255 Level Reset
TPM	2.0
I/O	
Serial Port	3 x RS-232/422/485 (Optional Max 4 x RS-232/422/485)
USB Port	4 x USB 3.0 Ports
LAN	10 x RJ45 Ports for GbE (Optional for 8 x POE total Max.100w)
Video Port	3 x DP, 4 x HDMI Ports
DIO Port	8 x GPI and 4 x GPO
Audio	1 x Line-out, 1 x Line-in and 1 x Mic-in
Expansion Bus	3 x Full Mini-PCIe Slots and 1x M.2 A-E Key 2230/3030 slot (2 x SIM Card Sockets for 3G/LTE)
Software	
Operating System	Win 10, Ubuntu 18.04 64bit
Graphics	
Graphics	NVIDIA® GeForce GTX 1060 GPU (1280 CUDA Cores) Support for OpenGL 4.5 and OpenCL™ 1.2 Support for DirectX® 12 (Feature Level 12_0) features, VR Ready
Resolution	Max Resolution (HDMI 2.0b) :4096x2160@60Hz

Environmental	
Operating Temp.	-40°C ~ 60°C, ambient w/ 0.6m/s airflow Patent No. : M565941 - Thermal Cooling
Storage Temp.	-40°C ~ 80°C
Relative Humidity	10% RH ~ 90% RH (non-condensing)
Vibration (with SSD)	IEC60068-2-64, random, 2.5G@5~500Hz, 1hr/axis MIL-STD-810G, Method 514.6, Procedure I, Cat.4, Operating
Shock	Operating: MIL-STD-810G, Method 516.6, Procedure I, Trucks and semi-trailers=15G (11ms) with SSD
Certifications	CE, FCC Class A, E13
Storage	
Type	2 x 2.5" Drive Bay for SATA Type HDD/SSD RAID 0, 1, 5 1 x mSATA
Power Requirement	
Power Input	9V - 48V DC Power Input
Power Protection	Automatics Recovery Short Circuit Protection
Power Mgmt.	Vehicle Power Ignition for Variety Vehicle
Power Off Control	Power off Delay Time Setting by BIOS and Software
Battery (UPS)	Internal Battery Kit for 10 Mins Operating (optional) *UPS backup time varies depending on actual overall system power consumption. Patent No. : M447854 - Build-in Battery
Mechanical	
Construction	Aluminum Alloy
Mounting	Wall-mount
Weight	5250g (Barebone)
Dimensions	260(L) x 250(W) x 95(H) mm

All specifications are subject to change without notice.

Dimensions

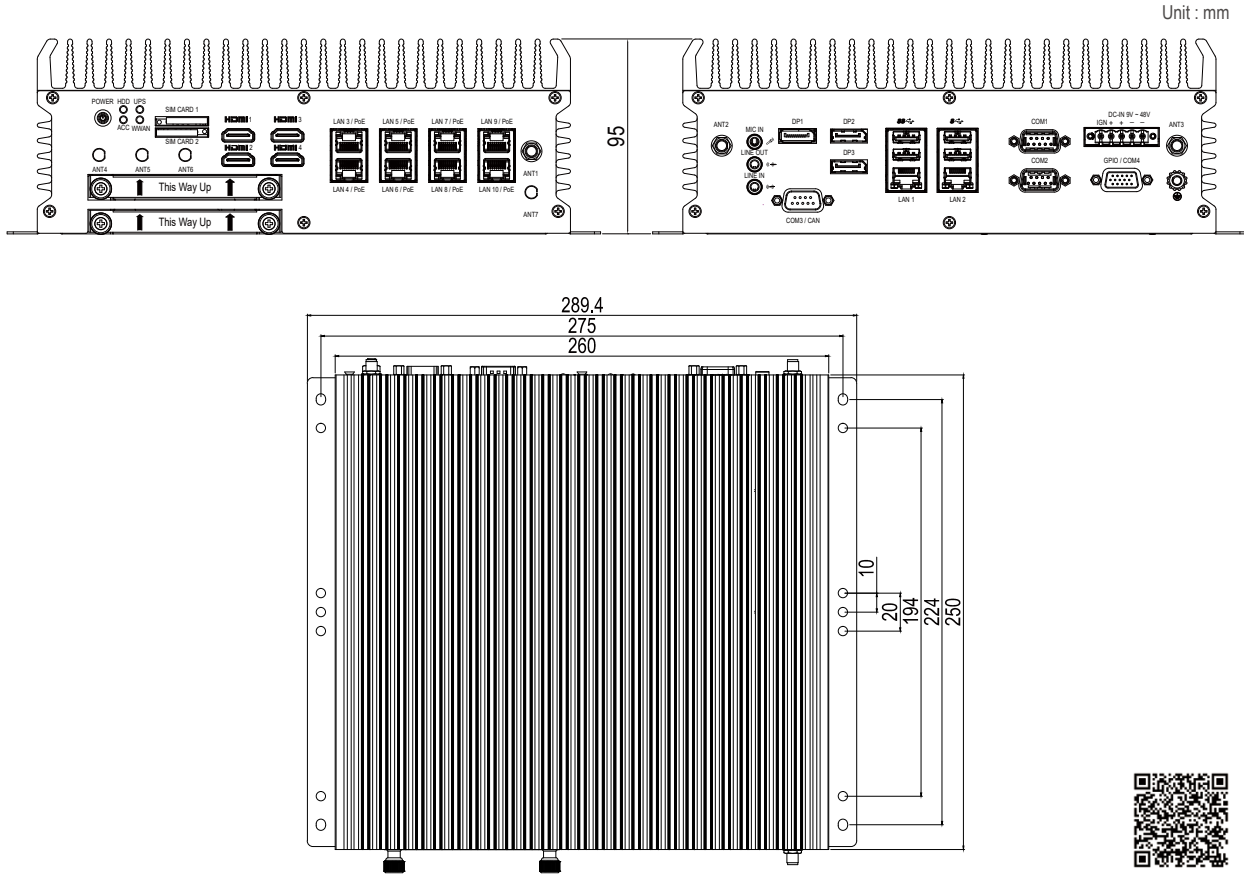

Please Scan The QR Code For More Information

Ordering Information

Part Number	ABOX-5200PG4-i7 Optional for i5/i3/C1 (with PoE) ABOX-5200G4-i7 Optional for i5/i3/C1
Description	Intel Gen 8th 6 Cores i7 CPU w/ 10 x GbE (Optional 8 x PoE)/ 3 x COM/ 3 x DP/ 4 x HDMI/ 4 x USB 3.0/ NVIDIA® GeForce GTX 1060 1280 CUDA cores GPU/ DC 9-48V Input AI GPU Computing
State of Origin	Made in Taiwan

Optional Accessories

DRAM	SO-DIMM max.DDR4-2666,4GB-32GB,0~70°C/-40~85°C
SATA SSD	2.5inch MLC/TLC 64GB~1TB 0~70°C/-40~85°C
mSATA	MLC 16G~512GB, 0~70°C/-40~85°C
Wifi	M.2 802.3a/b/g/n/ac
Modem	LTE miniPCle card
GPS	GPS miniPCle card
CANBUS	CANBUS miniPCle card
Battery backup kit	BAT-5200 kit, 5200mA/h, -30~60°C, discharge -20~60°C, operating about 10 mins. Cannot be used w/GTX1060
Power adapter	AC/DC 280W/24V power adaper
Fan kit	ABOX-5200 FAN kit, total size 260x253x120.7mm

All specifications are subject to change without notice.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660