

Lanolinx LNX-500A/800A

5/8-Port 10/100BaseTX Slim Industrial Switch




Features

- ▶ RJ-45 Port Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 2K MAC Address Table
- ▶ Wide-Range Redundant Power Design
- ▶ Power Polarity Reserve Protect
- ▶ Overload Current Resettable Fuse Present
- ▶ Provides Broadcast Storm Protection
- ▶ Provides EFT Protection 3000 VDC for Power Line
- ▶ Supports 4000 VDC Ethernet ESD Protection
- ▶ UL Class I, Division 2 Certified
- ▶ IP30 Rugged Aluminum Case Design
- ▶ DIN-Rail and Wall Mount Design
- ▶ 5-Year Warranty



▶ Specifications

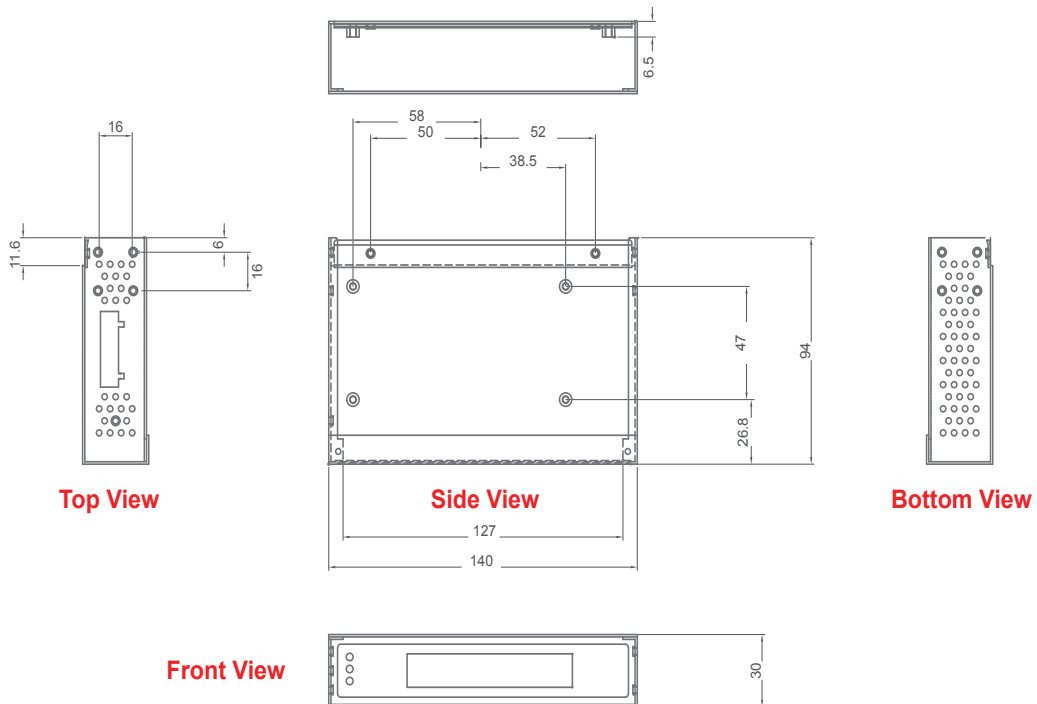

► Specifications

Standard

IEEE 802.3 10BaseT Ethernet
IEEE 802.3u 100BaseTX Fast Ethernet
IEEE 802.3x Flow Control and Back-Pressure

Protocol

CSMA/CD

Switch Architecture

Store and Forward

Transfer Rate

14,880pps for Ethernet Port
148,800pps for Fast Ethernet Port

MAC Address

2K MAC Address Table

Memory Buffer

LNX-500A: 384 Kbits
LNX-800A: 448 Kbits

LED

Unit: Power 1, Power 2, Fault
Port: Link/Activity, Full-Duplex/Collision

Connector

LNX-500A: 5 x 10/100TX RJ-45 with Auto MDI/MDI-X Function
LNX-800A: 8 x 10/100TX RJ-45 with Auto MDI/MDI-X Function

Network Cable

10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m)
100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)

Back-Plane

LNX-500A: 1.0 Gbps
LNX-800A: 1.6 Gbps

Packet Throughput Ability

LNX-500A: 1.49Mpps @ 64bytes
LNX-800A: 2.38Mpps @ 64bytes

Power Supply

DC 12 ~ 48V, Redundant Power with Polarity Reverse Protect Function and Removable Terminal Block

Power Consumption

LNX-500A: 2.93 Watts
LNX-800A: 4.71 Watts

Reverse Polarity Protection

Present

Overload Current Protection

Present

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 30 x 140 x 95 mm (1.18 x 5.51 x 3.74 in.)
Installation: DIN-Rail/Wall Mountable

Weight

Unit Weight: 1 lbs.
Shipping Weight: 1.5 lbs.

Operation Temperature

Standard: -10° C to 70° C (14° F to 158° F)
Wide Operating Temperature: -40° to 80° C (-40° to 176° F)

Operation Humidity

5% to 95% (Non-condensing)

Storage Temperature

-40° C to 85° C

EMI

FCC Class A
CE EN6100-4-2/EN6100-4-3/EN6100-4-4/EN6100-4-5/EN6100-4-6
/EN6100-4-8/EN6100-4-11/EN6100-4-12/EN6100-6-2/EN6100-6-4

Safety

UL/cUL Class I, Division 2
CE EN60950-1

Stability Testing

Shock: IEC60068-2-27
Free Fall: IEC60068-2-32
Vibration: IEC60068-2-6

Warranty

5-Year Warranty

► Ordering Information

LNX-500A
LNX-500A-T
LNX-800A
LNX-800A-T

5-Port 10/100BaseTX Slim Industrial Ethernet Switch
5-Port 10/100BaseTX Slim Industrial Ethernet Switch, Wide Operating Temperature
8-Port 10/100BaseTX Slim Industrial Ethernet Switch
8-Port 10/100BaseTX Slim Industrial Ethernet Switch, Wide Operating Temperature

Optional Accessories

DR-4524
DR-75-24
DR-120-24

45W 24VDC Industrial DIN Rail Power Supply
75W 24VDC Industrial DIN Rail Power Supply
120W 24VDC Industrial DIN Rail Power Supply

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>

antaira
www.antaira.com

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660