


**Hisense**

55" High Brightness Display

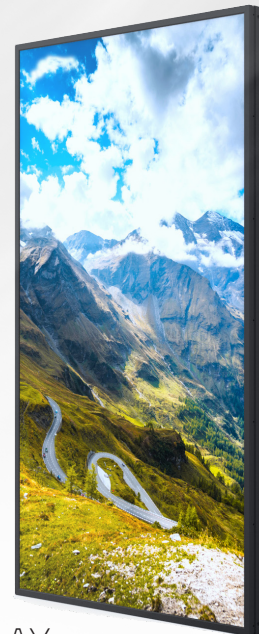

# 55WF25E

## 55" WINDOW FACING - HIGH BRIGHTNESS DISPLAY

Easy to install Window Facing Digital Signage Display's maximise customer engagement with vivid their image quality. With ultra high brightness of 2500 nits, the Hisense window facing displays will attract attention in any lighting condition.

### Highlights



#### Round-the-clock operation

Designed with quad-core System on Chip (SoC) technology the window facing display can be used as reliable digital signage displays for both offline and cloud based content.



#### Landscape & portrait

Both landscape and portrait orientations are possible, providing you with endless creative and functional possibilities to fulfil your commercial or informative goals.



#### 2500 nits

With 2500 nits maximum brightness, the panels are 3500 well equipped to make your content vividly stand out in any commercial location. We also have 3500 and 4500 nit window facing displays available to special order. Please contact your Hisense representative for more details.



#### 178° Wide viewing angle

The extra wide 178° viewing angle is a perfect fit for shoppers, employees or visitors that will view Window Facing displays from diverse angles while passing by.



#### Visible With Polarized Sunglasses

2,500 nits LCD to give you a clear image, even in direct sunlight. Enables clear visibility even when the viewer is wearing polarized sunglasses.



#### Smart Brightness Sensor

Adjusts the brightness of the monitor automatically according to the surrounding lighting conditions. This feature considerably reduces power consumption and increases the monitor's lifetime.



# Hisense

55" High Brightness Display

## Specifications

### General

	55WF25	55WF35	55WF45
Model	55WF25	55WF35	55WF45
Screen Size	55"	55"	55"
Screen Active Area(mm)	1209.6x680.4	1209.6x680.4	1209.6x680.4
Resolution	FHD(1920x1080)	FHD(1920x1080)	FHD(1920x1080)
Aspect Ratio	16:9	16:9	16:9
Brightness(nit)	2500nits	3500nits	4500nits
Contrast Ratio	1000:1	1000:1	1000:1
Dynamic CR	Upto 250000:1	Upto 350000:1	Upto 450000:1
Viewing Angle(H/V)	178°/178°	178°/178°	178°/178°
Backlight Life Cycle	50,000 Hrs	50,000 Hrs	50,000 Hrs
Operation Hours	24/7	24/7	24/7
Response Time	6ms	6ms	6ms
Screen Orientation	Portrait or Landscape	Portrait or Landscape	Portrait or Landscape

### System

OS	Android 9.0
CPU	ARM Quad Core Cortex-A53 1.5G
GPU	Arm Mali-G52 2EE MC1
DDR	DDR 2GB
ROM	8GB EMMC
Language	Chinese/English

### Connectivity

Input	USB2.0 x2, HDMI IN x2, Ethernet RJ45 x2, RS232 RJ45 x1, IR in x1, Sensor x1
Output	HDMI Out x1, Audio out x1

### Network connection

Wifi or LAN	Yes
3G/4G connection	Optional

### Speaker

Build in speaker	Yes
Line-out Support	Yes
BT Speaker Support	Yes

### Thermal management

Smart Backlight Control	Yes
Smart Temperature Control	Yes
Smart Fans Control	Fanless
Smart Monitoring System Cloud	Optional / CetusMSC
Overheating protection	Yes

Special Order

### Physical

IP rating	IP5X (Front Panel)
Glass	No
Shell	Aluminum
Standard Color	Black
Bezel width(T/L/R/B)	15.3mm(T/B/L/R)
Dimensions	1242.2(H)x713(W)x56.75(D) mm
Net Weight	29 kg
Packing Dimensions(W×H×D)	1404(W)x867(H)x180(D) mm
20GP container capacity (pcs)	96 PCS
40GP container capacity (pcs)	192 PCS

### Operation

Working environment	Indoor window facing
Auto Brightness control	Light sensor
Noise(Operating at 25±2°C,100cm apart from the module)	/
Operation Temperature (ambient temp.)	-10°C to 35°C (Direct Sunlight) -10°C to 45°C (w/o Direct Sunlight)
Operation Humidity	10% to 80%
Storage Temperature	-10°C to +60°C
Storage Humidity	10% to 80%

### Power


Power Supply	AC 110 /220V,50/60Hz
Power Type	Built-In Power
Power Consumption	320W(Max.)

### What's in the box

Accessories	Power cord
	Remote controller
	User manual
	WIFI antenna

### Dimensions

**55"** 1242.2 x 713 x 56.75 mm  
29 kg

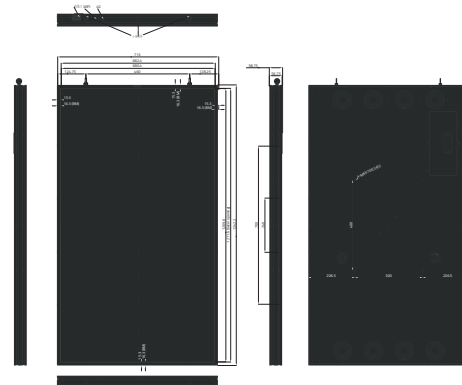

### HISENSE B2B EUROPE

Beechavenue 139,  
1119 RB Schiphol-Rijk,  
Netherlands

[www.hisense-b2b.com](http://www.hisense-b2b.com)  
[sales@hisense-b2b.com](mailto:sales@hisense-b2b.com)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660