

ViTAM-919BPR(H)

19" IP66 / IP69K Stainless Steel Panel PC

Industrial Panel PC



Features / /

- 19" New Generation Stainless Steel Panel PC
- 8th Gen. Intel Core i3/i5 BGA type Processor
- True Flat Front Bezel Design and Grade 304 Stainless Steel Enclosure (Grade 316 for Option)
- IP66/IP69K Rated with M12 Connectors
- Support Resistive Touch, Projected Capacitive Touch
- Touch on/off Button on the Side Edge for Hygienic Cleaning
- Support Ergonomic Versatile Mounting: Yoke Mounting / Space-saving VESA 100 x 100 mm Mounting







System	
CPU	Core i5-8365UE(Quad Core, 6 MB cache, 1.6GHz) Core i3-8145UE(Dual Core, 4 MB cache, 2.2GHz)
System Chipset	SoC
Memory	2 x 260-pin SO-DIMM up to 64GB DDR4 2400MHz
TPM	Firmware TPM (TPM 2.0 compliance)
IO Port	
10 Port	
USB	1 x M12 8-pin for USB 2.0 with waterproof cover and chain
Serial / Parallel	1 x M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain
LAN	1 x M12 8-pin for LAN with waterproof cover and chain
Others	1 x Touch on/off button at the side
Power Connector	1 x M12 3-pin for DC power with waterproof cover and chain 1 x Power switch on the rear
Option	2 x optional blank M12 connector with waterproof cover and chain for selecting two from the following options: 2 x USB 2.0 1 x USB 3.2 Gen.1 1 x LAN 1 x COM


Storage Space	
HDD	1 x 2.5" SATA3 HDD (for option)
M.2	1 x B-key 2280 (SATA as default, PCI-e select by BIOS) for SSD

LXPailSiOil	
Expansion slot	1 x Full size mSATA/mPCle (mSATA as default, select by BIOS) 1 x NANO-SIM
	1 x M.2 E-key 2230 (PCle+USB) for optional WIFI/BT module
RFID module	RFID module design on the front side (for option)

Display	Standard	High Brightness Optional
Display Type	19" TFT-LCD	19" TFT-LCD
Max. Resolution	1280 x 1024	1280 x 1024
Max. Color	16.7M	16.7M
Luminance (cd/m²)	350	1000
View Angle	170(H) /160(V)	170(H) /160(V)
Contrast	1000:1	1000:1
Backlight Lifetime	50.000 hrs	50,000 hrs

Touch Screen	
Туре	Resistive Touch (for BR model) Projected Capacitive (for BP model)
Interface	USB
Light Transmission(%)	Resistive Touch : 80% Projected Capacitive : 90%



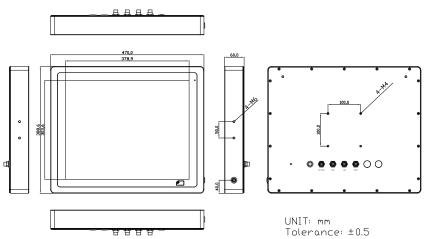

Power		
Power Input		DC 9~36V
Power Consumpti	on	ViTAM-919BP: 39W
Mechanical		
Construction		304 Stainless steel chassis(default), 316 Stainless steel chassis(optional)
Mounting		VESA mount 100 x 100, Yoke mount for optional
IP Rating		Total IP66/IP69K
Dimensions		470 x 388.6 x 60 mm
Net Weight		9.5 kg
Environmental		
Operating Temper	ature	0~50°C
Storage Temperat	ure	-30~70°C
Humidity		10 to 95% @ 40°C, non-condensing
Certificate		CE/FCC Class A
Operating System	n Supp	port
Windows 10 IoT ENT LTSB, Windows 11		SB, Windows 11
Ordering Informa	ation	
ViTAM-919BP	2 x SO-	SA IP66/IP69K stainless steel panel pc, Intel 8th Gen. Core i Processor DIMM DDR4 slots, 128GB TLC SSD, projected capacitive touch, 9~36V rer input with Adapter
ViTAM-919BR	2 x SO-	SA IP66/IP69K stainless steel panel pc, Intel 8th Gen. Core i Processor, DIMM DDR4 slots, 128GB TLC SSD, 5 wire resistive touch window, 9~36 ver input with Adapter
ViTAM-919BPH	2 x SO-	3A IP66/IP69K stainless steel panel pc, Intel 8th Gen. Core i Processor, DIMM DDR4 slots, 128GB TLC SSD, projected capacitive touch, 9~36V ver input with Adapter, 1000 nits
ViTAM-919BRH	2 x SO-	GA IP66/IP69K stainless steel panel pc, Intel 8th Gen. Core i Processor, DIMM DDR4 slots, 128GB TLC SSD, 5 wire resistive touch window, 9~36 rer input with Adapter. 1000 nits

V 1.2

Industrial Panel PC

All specifications and photos are subject to change without notice.

All specifications and photos are subject to change without notice

Industrial Panel PC



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660