

# R15L600-65EX

## 15" IP65 Stainless ATEX Rugged Display



### KEY FEATURES

- Class 1, Division 2 & ATEX Zone 2 application certification rugged touchscreen
- 15" 1024 x 768, 550 nits (Optional 1000 nits) LCD Panel
- Explosion-proof 5-wire resistive touch
- Stainless steel design
- IP65 Certified, dust-proof and water-resistant



### SPECIFICATIONS

Display			
<b>Touch / Glass</b>	Resistive Touch Screen Bonding With Panel (Explosion-Proof)	<b>Resolution</b>	1024x768
<b>Size</b>	15.0 inches	<b>Contrast Ratio</b>	2000:1
<b>Panel Brightness</b>	550 nits 1000 nits(Optional)	<b>Display Color</b>	16.2M Colors
<b>View Angles</b>	88,88,88,88	<b>Active Area</b>	304.1x228.1 mm
Mechanical			
<b>Dimension</b>	396 x 310 x 49 mm	<b>Weight</b>	5.5 kg
<b>Mounting</b>	VESA Mount	<b>Enclosure</b>	Stainless Housing
<b>Cooling System</b>	Fanless design	<b>Cut out</b>	365 x 270 mm
Environment			
<b>Operating Humidity</b>	10% to 95% RH, Non-Condensing	<b>Operating Temperature</b>	-20°C to 60°C
<b>Storage Temperature</b>	-20°C to 60°C	<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I (Optional)
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	<b>IP rating</b>	IP65
<b>Drop</b>	MIL-STD-810G Method 516.6 Procedure IV		
Certification			
<b>Certification</b>	CE, FCC  UL 60950-1 CAN/CSA C22.2 No. 60950-1-07 EN 62368-1  Class I, Div.2, Groups A,B,C,D T4 -20 ≤ Tamb ≤ 50 Meet Standards ANSI/ISA-12.12.01-2012 CSA/CSA C22.2 No. 213-M1987  ATEX II 3G Ex ic nA IIC T4 Gc -20 ≤ Tamb ≤ 50 Meet Standards EN 60079-0, EN 60079-11, EN 60079-15  IECEx Ex nA IIC T4 Gc -20 ≤ Tamb ≤ 50 Meet Standards		

IEC 60079-0, IEC 60079-15

**IO Ports**

<b>Power Input</b>	1 x 9~36V DC, M12 Type connector	<b>USB Port</b>	1x M12 type connector for Touchscreen
<b>Serial Port</b>	1 x M12 type connector for RS232 remote control	<b>Video</b>	1x M12 type connector for VGA input
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for standby		


**Control**

<b>Button</b>	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
---------------	---

**Accessory**

<b>Accessory</b>	100~240V AC to DC Power Adapter with M12 Connector Power Cord M12 Type Power Cable M12 Type RS232 Male Cable for remote control M12 Type USB Male Cable for Touch M12 Type VGA Cable Manual VESA screws
------------------	--

**DIMENSIONS** UNIT:MM

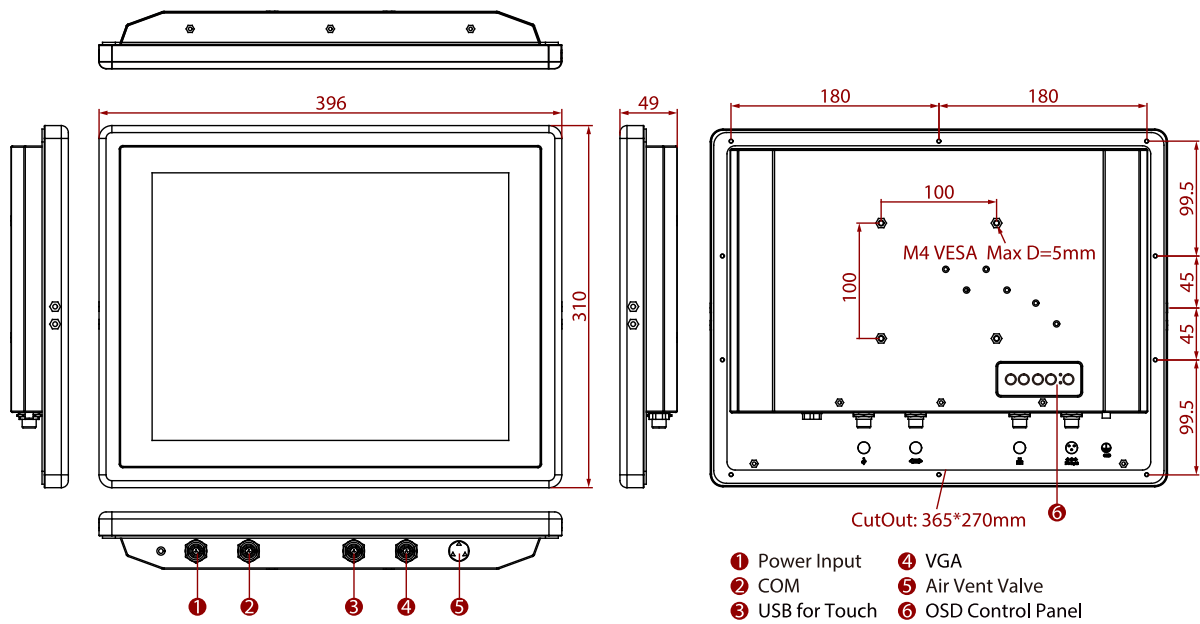

**NOTE**

1. Total usable memory will be less depending upon actual system configuration
2. Length measurements do not include protrusions. Weight varies with options.
3. Accessories and integrated options may vary depending on your configuration
4. This is a simplified drawing and some components are not marked in detail.
5. All specifications are subject to change without prior notice.
6. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660