

# LMX-0800G Series

8-Port Industrial Managed Ethernet Switch, with 8\*10/100/1000Tx Ports; 12~48VDC Power Input



## Features


- ▶ Supports 8\*10/100/1000Tx RJ45 Ports
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ System Warning Setting for Automatic Warning through E-mail
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temperature Range: STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

## INTRODUCTION

**Antaira Technologies' LMX-0800G series** is an 8-port industrial Gigabit managed Ethernet switch that is embedded with 8\*10/100/1000Tx Ethernet ports. The LMX-0800G series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-0800G series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

## DIMENSIONS

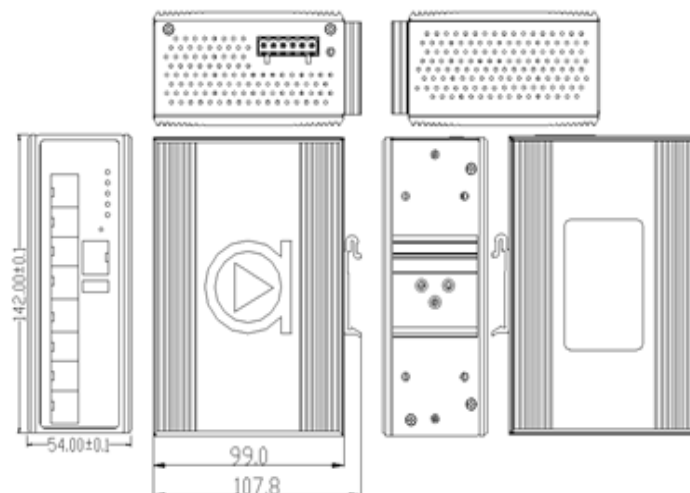

## SPECIFICATIONS

<b>Technology</b>		<b>Protection</b>	
	IEEE 802.3 10Tx Ethernet	<b>Overload Current Protection</b>	Present
	IEEE 802.3u 100Tx Fast Ethernet	<b>Power Reverse Polarity</b>	Present
	IEEE 802.3x Flow Control for Full Duplex	<b>CPU Watchdog</b>	Present
	IEEE 802.3ad for Port Trunk with LACP		10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m)
	IEEE 802.1d STP (Spanning Tree Protocol)	<b>Network Cable</b>	1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	<b>Mechanical Characteristics</b>	
<b>Standards</b>	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)	<b>LED Indicators</b>	Per Unit: Power 1 & 2 (Green), Fault (Green/Red)
	ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol	<b>Housing</b>	Metal, IP30 rated
	IEEE 802.1Q for VLAN Tagging	<b>Dimension</b>	54 x 142 x 99 mm
	IEEE 802.1x for Network Authentication	<b>Weight</b>	Unit: 2.4 lbs Shipping: 2.9 lbs
	IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	<b>Mounting</b>	DIN-Rail; Wall-mount (optional)
<b>Switch Properties</b>		<b>Power Requirement</b>	
	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS	<b>Input Voltage</b>	12~48VDC Redundant Input
<b>Protocol</b>	Web Console, Telnet, CLI	<b>Power Connection</b>	1 removable 6-contact terminal block
<b>Configuration</b>	Store and Forward	<b>Power Consumption</b>	15 Watts
<b>Processing Type</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	<b>Environmental Limits</b>	
<b>Flow Control</b>	14,880pps for 10Base-T Ethernet	<b>Operating Temperature</b>	STD: -10° to 70°C EOT: -40° to 75°C
<b>Transfer Rate</b>	148,800pps for 100Base-T Fast Ethernet	<b>Storage Temperature</b>	-40°~85°C
	1,488,000pps for Gigabit Ethernet	<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
<b>Packet Buffer</b>	4 Mbits	<b>Regulatory Approvals</b>	
<b>Jumbo Frame</b>	9.6K	<b>EMI</b>	FCC Class A
<b>MAC Table Size</b>	8K	<b>EMS</b>	EN61000-4-2,3,4,5,6,8 EN61000-6-2,4
<b>VLAN Group</b>	0 ~ 4094	<b>Free Fall</b>	IEC60068-2-32
<b>IGMP Group</b>	Up to 256 Group	<b>Shock</b>	IEC60068-2-27
<b>Port Interface</b>		<b>Vibration</b>	IEC60068-2-6
<b>Ethernet Port</b>	8*10/100/1000BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	<b>Green</b>	RoHS Compliant
<b>RS232 Serial Console</b>	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1	<b>Certifications</b>	FCC, CE, UL 61010-1, UL 61010-2-201
<b>Configuration Backup</b>	1*USB 2.0	<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LMX-0800G</b>	8-Port Industrial Managed Ethernet Switch, with 8*10/100/1000Tx Ports; 12~48VDC Power Input
<b>LMX-0800G-T</b>	8-Port Industrial Managed Ethernet Switch, with 8*10/100/1000Tx Ports; 12~48VDC Power Input; EOT: -40° to 75°C

### Optional Accessories

<b>MDR-60-24</b>	60W Industrial Din Rail Power Supply, 24VDC
<b>MDR-60-48</b>	60W Industrial Din Rail Power Supply, 48VDC
<b>DR-75-48</b>	75W Industrial Din Rail Power Supply, 48VDC
<b>DIN-RACK-2U</b>	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660