


# BOXER-6645U-RPL

Fanless Embedded Box PC with Socket Type 12/13/14th Generation Intel® Core™ Processor

Compact Fanless BOX PC Solutions

Front View

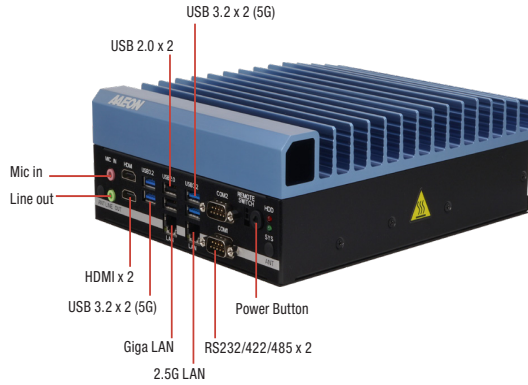

Rear View



## Features

- 12/13/14th Generation Intel® Core™ LGA 1700 socket-type Processor with Intel® H610E Chipset
- Wide Operating Temperature (-25°C ~ 70°C)
- HDMI output x 2
- GbE LAN x 2
- USB Type-A x 6
- RS-232/422/485 x 2, RS-232 x 4 (Optional)
- Internal 2.5" SSD bay x 2
- 10 ~ 35 VDC power input range
- TPM 2.0 onboard



## Specifications

System	
CPU	12/13/14th Generation Intel® Core™ LGA 1700 socket-type Processor, Max TDP 65W 13th Generation Intel® Core™ Processors: Intel® Core™ i9-13900TE, Intel® Core™ i9-13900E, Intel® Core™ i7-13700TE, Intel® Core™ i7-13700E, Intel® Core™ i5-13500TE, Intel® Core™ i5-13500E, Intel® Core™ i3-13100TE, Intel® Core™ i3-13100E, 14th Generation Intel® Core™ Processors: Intel® Core™ i9-14900, Intel® Core™ i9-14900T, Intel® Core™ i7-14700, Intel® Core™ i7-14700T, Intel® Core™ i5-14500, Intel® Core™ i5-14500T, Intel® Core™ i3-14100, Intel® Core™ i3-14100T,
Chipset	Intel® H610E
System Memory	DDR5 SODIMM x 2, up to 64GB
Display Interface	HDMI x 2, 4K x 2K @30Hz
Storage Device	2.5" SATA Drive Bay x 2 M.2 2280 M-Key x 1 (PCIe Gen 3 [x4]) for NVMe
Ethernet	Intel® I219-LM, GbE RJ-45 x 1 Intel® I226-LM, 2.5GbE RJ-45 x 1
I/O	USB 3.2 Gen 2 x 4, USB 2.0 x 2 DB-9 x 2 for RS-232/422/485 Audio x 1 (Mic-in/Line-out) Power Button with power LED x 1 Remote Power On/Off x 1
Expansion	M.2 2280 M-Key x 1 (For NVMe Storage) M.2 2230 E-Key x 1 (for Wi-Fi/Bluetooth) Full Size MiniPCIe x 1 (optional for mSATA) Onboard TPM 2.0
Indicator	System / Storage
OS support	Windows® 10 IoT Enterprise 64-bit Windows® 11 PRO 64-bit Linux Ubuntu 22.04
Power Supply	
Power Requirement	3-pin DC Input 10~35V
Mechanical	
Mounting	Wallmount
Dimensions (W x H x D)	7.09" x 3.04" x 8.66" (180mm x 77.2mm x 220mm) 8.43" x 3.31" x 8.66" (214mm x 84.2mm x 220mm) with brackets
Gross Weight	8.59 lb (3.9 kg)
Net Weight	6.39 lb (2.9 kg)
Environmental	
Operating Temperature	-13°F ~ 131°F (-25°C ~ 55°C), IEC60068-2 with 0.7 m/s AirFlow, with wide temperature memory/storage (TDP 65W CPU) -13°F ~ 158°F (-25°C ~ 70°C), IEC60068-2 with 0.7 m/s AirFlow, with wide temperature memory/storage (TDP 35W CPU)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Storage Humidity	5 ~ 95% @ 40°C, non-condensing
Anti-Vibration	IEC60068-2-64, 3 Grms/5 ~ 500Hz/ operation (with SSD)
Anti-Shock	50G, IEC60068-2-27, half sine, 11ms duration (with SSD)
Certification	CE/FCC Class A



## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660