
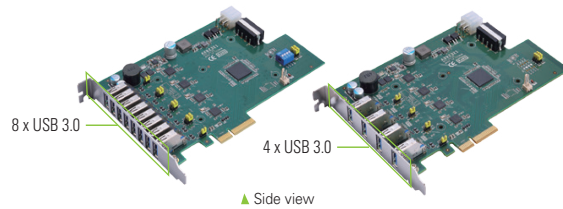


# AX92321 NEW

4-port/8-port USB 3.0 PCI Express Card with 4 Independent Host Controllers

## Features

- Four or eight USB 3.0 ports
- Four independent USB 3.0 host controllers
- 900 mA/1500 mA max. per port configurable via jumper settings
- Compliant with USB 3.0 Rev.1.0 and Intel® xHCI Rev.1.0
- PCI Express x4 interface
- Operating temperature from 0°C to 70°C
- Supports Windows® 7/10
- Supports each port's power on/off via software settings

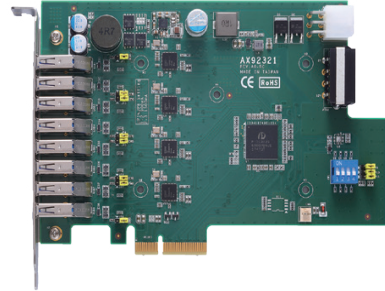

## Introduction

The AX92321 has two versions – 4-port or 8-port – for users to choose from for various applications. The 4-port AX92321 has four independent Renesas μPD720202 USB 3.0 host controllers to offer up to 5 Gbps bandwidth per port, even when four ports are used simultaneously. The AX92321 can be configured to support maximum 900mA or 1500mA current output to supply stable power for various external USB devices. The AX92321 also support power on/off control for each port via software settings. This USB 3.0 PCI Express card is able to operate under a wide operating temperature range of 0°C to 70°C, allowing it to be used in harsh environments for vision and factory automation applications.

## Specifications

USB	
Channels	4 x USB 3.0 type A connector (AX92321-4U) 8 x USB 3.0 type A connector (AX92321-8U)
Controller	4 x Renesas μPD720202 host controllers Compliant with USB 3.0 specification and Intel® xHCI specification, revision 1.0
Max. Current	900/1500 mA maximum per port configurable via jumper settings
Data Transfer Rate	Super speed (5.0 Gbps)/high speed (480.0 Mbps)/full speed (12.0 Mbps)/low speed (1.5 Mbps)

General	
Bus Type	PCI Express x4 Gen2
Power Requirements	Power from PCIe slot (total power max. 20W USB power output) 2.1A @ +12V 0.8A @ +3.3V Power from ATX power connector 5A @ +12V or 2.5A @ +24V 0.8A @ +3.3V (from PCIe slot) Power from 4P Molex power connector 5A @ +12V 0.8A @ +3.3V (from PCIe slot)
Dimensions	168 mm (6.6") x 107 mm (4.2")
Power Connector	4-pin Molex connector 6-pin ATX power connector
Operating Temperature	0°C to +70°C (+32°F to +158°F)
Storage Temperature	-20°C to +80°C (-4°F to +176°F)
Operating Humidity	10 - 95% RH, non-condensing
Certifications	CE compliance
OS	Windows® 7/10 (32/64-bit)
Software	Each port's power on/off is controlled by software

## Ordering Information

AX92321-4U (P/N: E392321101)	4-port USB 3.0 PCI Express card with 4 independent USB 3.0 host controllers
AX92321-8U (P/N: E392321100)	8-port USB 3.0 PCI Express card with 4 independent USB 3.0 host controllers
For IPC962/964 Riser Card Power Connector (P/N: 59492320700E)	Power cable 4P3.0/6P4.2, L=100 mm

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

PCI Express Cards

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660