

HPS-SRSU4A

Single 4th Generation Intel® Xeon® Scalable Processor with Intel® C741 Chipset, 1300W, 5x RJ-45, IPMI2.0 Workstation



Features

- 19" 4U Chassis
- 430mm (W) x 174.8mm (H) x 528mm (D)
- 1x 1300W PS2 ATX PSU
- 3x Front accessible 2.5" storage bays
- Intel LGA4677 Socket supports 4th Generation Intel® Xeon® Scalable Processor (Max. TDP at 270W)
- Intel® C741 Chipset
- 6x DDR5 4800/ 4400 MHz RDIMM up to 1.5TB
- IPMI 2.0 with AST 2600 BMC controller onboard
- 1x Intel I210AT 1GbE controller
- 1x Intel I226-LM 2.5GbE controller
- 1x Intel X550AT2 10GbE controller supports 2 x 10GbE Ethernet ports



4th Gen. Intel® Xeon® Scalable Processor



6x DDR5 RDIMM 4800/4400MHz



IPMI 2.0 Supported



10GbE



PCIe Gen5 Multiple Expansion

Specifications

System Information

Processor	Intel LGA4677 Socket supports 4th Generation Intel® Xeon® Scalable Processor (Max. TDP at 270W)
Platform Controller Hub	Intel® C741 Chipset
System Memory	6x DDR5 4800/ 4400 MHz RDIMM up to 1.5TB
BIOS	AMI UEFI BIOS
Watchdog Timer	System reset event 0 ~ 6553 seconds
H/W Status Monitor	CPU temperature Fan speed and voltage monitoring Fan speed control Case open detection
TPM	TPM 2.0 onboard
IPMI	IPMI 2.0 with AST 2600 BMC controller onboard
SBC	HPM-SRSUA

Front I/O

USB	2x USB 3.2 Gen1 ports
Power Button	1x Power button
Reset Button	1x Reset button
LED Indicator	1x Power status indicator 1x Disk activity indicator 1x Network activity indicator

Rear I/O

USB	4x USB 3.2 Gen1 ports 2x USB 2.0 type A ports
COM Port	1x RS232 port
VGA	1x VGA port
RJ-45	5x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shares with IPMI access LAN2 port for 2.5GbE LAN3 and 4 ports for 10GbE

Display

Graphic Chipset	AST 2600 BMC controller
Resolution	1x VGA port VGA: 1920 x 1200 @ 60Hz 32bpp

Power Requirement

Power Supply Unit	1x 1300W PS2 ATX PSU
--------------------------	----------------------

Expansion

Expansion	4x PCIe Gen5 x16 slots and 3x PCIe Gen5 x4 slots Slot 1, PCIe 5.0 x16 Slot 2, PCIe 5.0 x4 Slot 3, PCIe 5.0 x16 Slot 4, PCIe 5.0 x4 Slot 5, PCIe 5.0 x16 Slot 6, PCIe 5.0 x4 Slot 7, PCIe 5.0 x16 (Slot 7 is the slot closest to CPU)
------------------	---

Storage

M.2	1x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280/22110 form factor
2.5 Drive Bay	3x Front accessible 2.5" storage bays

Ethernet

LAN Chipset	1x Intel I210AT 1GbE controller 1x Intel I226-LM 2.5GbE controller 1x Intel X550AT2 10GbE controller supports 2 x 10GbE Ethernet ports
LAN Port	5x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shares with IPMI access LAN2 port for 2.5GbE LAN3 and 4 ports for 10GbE

Mechanical & Environmental

Operating Temp.	0 ~ 35°C (L6 system)
Storage Temp.	-40°C 24hrs IEC60068-2-1 Cold test Test: Ab 70°C/ RH95% 24hrs IEC 60068-2-3 Test: Ca
Operating Humidity	35°C @95% Relative Humidity, Non-condensing
Weight	19.5KG
Dimension (W x L x D)	19" 4U Chassis 430mm (W) x 174.8mm (H) x 528mm (D) 482.6mm (W) x 174.8mm (H) x 528mm (D) with ear mount


Software Support

OS	Windows 10 IoT Enterprise LTSC 2021 Windows 11 Windows Server 2019 Windows Server 2022 Ubuntu 21.10, 22.04 LTS or later Red Hat Enterprise Linux (RHEL) 8.2 and later
-----------	--

HPS-SRSU4A

Single 4th Generation Intel® Xeon® Scalable Processor with Intel® C741 Chipset, 1300W, 5x RJ-45, IPMI2.0 Workstation

Mechanical Drawing

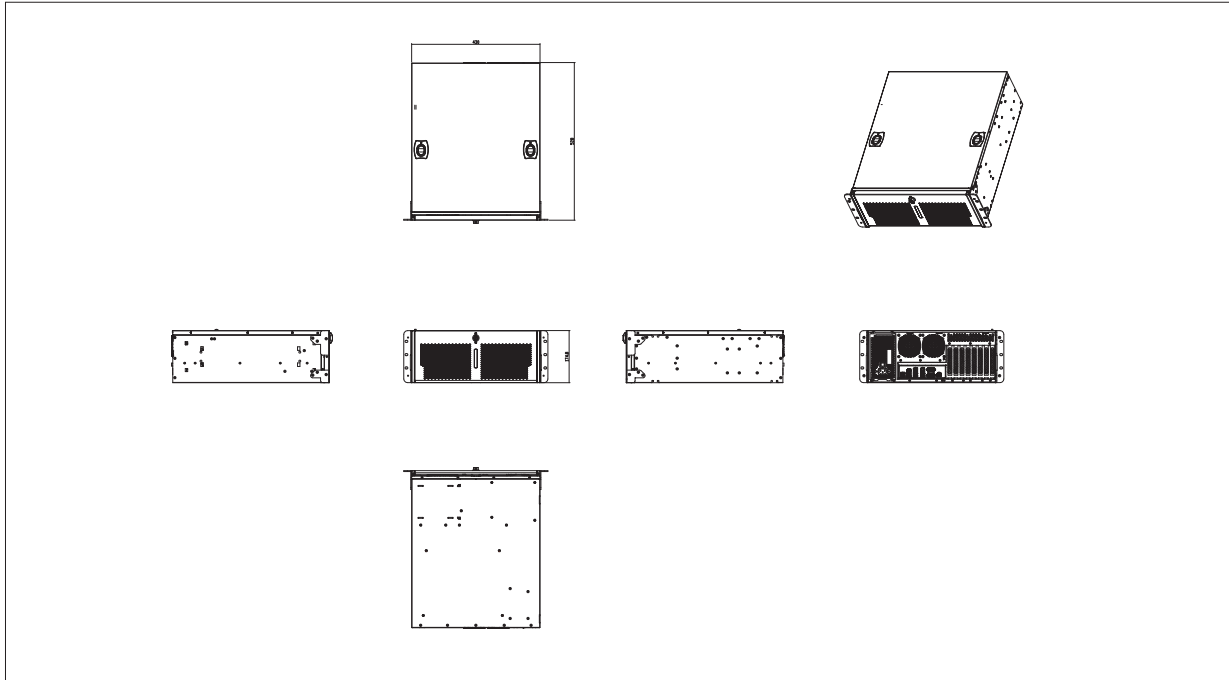

Ordering Information

Model Name	P/N	CPU	Chipset	Memory	PCIe Slot	10GbE/2.5GbE/1GbE	USB 3.2 Gen2/USB 3.2 Gen1/USB 2.0	2.5" Drive Bay	PSU
HPS-SRSU4A	HPS-SRSU4AD-A1R	1	C741	6	7	2/1/1	0/6/2	3	1300W PS2 ATX

Packing List

Item	P/N	Quantity
L6 19" 4U Rackmount w/HPM-SRSUAA/1300W	HPS-SRSU4AD-A1R	1
LGA4677 CPU carrier-E1B	E199TR00063R	1


Optional Items

Item	P/N
CPU Cooler for LGA4677 4U 4500RPM 350W	BCC-FAN-467-01R
US Power Cord 1.8M	E170P060390R
EU Power Cord 1.8M	E1702031000R
UK Power Cord 1.8M	E170P060380R
JP Power Cord 1.8M	E170P060410R

HPS-SRSU4A

Single 4th Generation Intel® Xeon® Scalable Processor with Intel® C741 Chipset, 1300W, 5x RJ-45, IPMI2.0 Workstation

I/O Overview

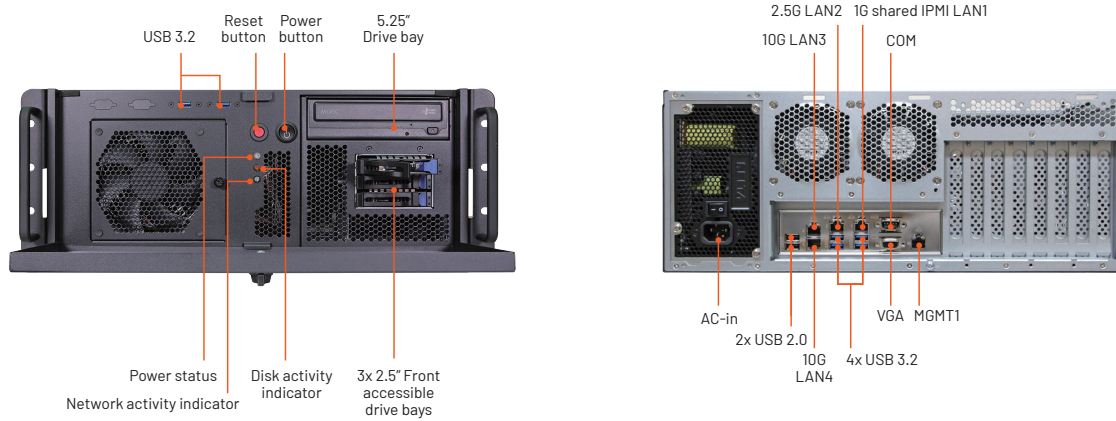

CPU Support List (HPC Only)

SKU	Launch Date	# of Cores	# of Threads	Processor Base Frequency	Max Turbo Frequency	TDP (W)
Intel® Xeon® Gold 6448Y	Q1,23	32	64	2.1 GHz	4.1 GHz	225
Intel® Xeon® Gold 6426Y	Q1,23	16	32	2.5 GHz	4.1 GHz	185
Intel® Xeon® Gold 6418H	Q1,23	24	48	2.1 GHz	4.0 GHz	185
Intel® Xeon® Gold 5415+	Q1,23	8	16	2.9 GHz	4.1 GHz	150
Intel® Xeon® Gold 5420+	Q1,23	28	56	2.0 GHz	4.1 GHz	205
Intel® Xeon® Gold 5418Y	Q1,23	24	48	2.0 GHz	3.8 GHz	185
Intel® Xeon® Silver 4416+	Q1,23	20	40	2.0 GHz	3.9 GHz	165
Intel® Xeon® Silver 4410Y	Q1,23	12	24	2.0 GHz	3.9 GHz	150
Intel® Xeon® Silver 4410T	Q1,23	10	20	2.7 GHz	4.0 GHz	150
Intel® Xeon® Bronze 3408U	Q1,23	8	8	1.8 GHz	1.9 GHz	125
Intel® Xeon® Gold 6430	Q1,23	32	64	2.10 GHz	3.40 GHz	270

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660