

OPC-5128(P)

12.1" Intel Celeron N2930 Open Frame Panel PC

Industrial Panel PC

HMI Controller

Box PC




Features /

- Intel Celeron N2930 Processor
- Low Power Consumption Design
- Slim & Fanless Design
- Easily Achieve Flat Front Bezel Design
- Adjustable Front Bezel Design(2mm, 3mm and 6mm Front Bezel)
- 5-wire Resistive Touch Window/Projected Capacitive Touch Screen Support 7H Optional
- Front Bezel IP65
- Wide-ranging 9~36V DC Power Input
- System Power LED Light



Dimensions /

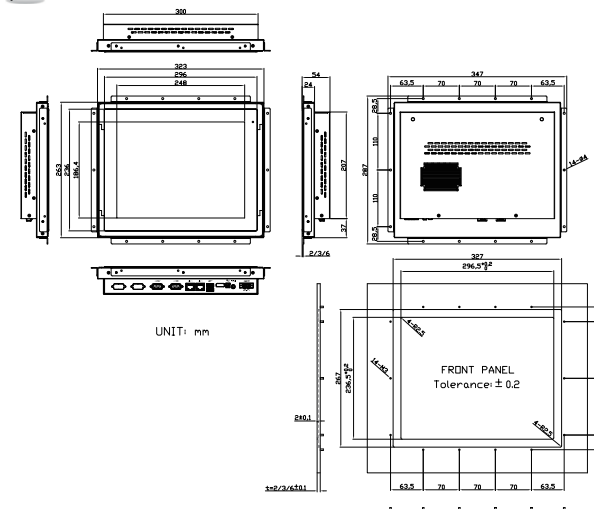

Specifications

System	
Processor	Onboard Intel Celeron N2930 1.83GHz Processor
System Chipset	SoC
System Memory	Onboard 4GB DDR3L 1600MHz
External I/O	
USB	2 x USB 3.0 type A
Serial/Parallel	1 x RS-232/422/485 DB-9, Default RS-232, COM1 1 x RS-232 DB-9, COM2
Audio	1 x Audio line out
LAN	2 x GbE LAN RJ-45
Power	1 x 3-pin DC Power input terminal 1 x 2-pin Connector for power on/off button
Others	1 x System power LED light
Option	2 x RS-232 DB-9 + 1 x Mini-PCle slot via TB-528C2ME1 2 x CAN bus via TB-528CAN2 2 x USB 2.0 type A + 1 x Mini-PCle slot + 1 x RS-232 DB-9 + 1 x Power Button via TB-528C1U2P1 2 x USB 2.0 type A via TB-528U2

Expansion

Expansion slot	1 x Intel Mini-PCIe slot full size
----------------	------------------------------------

Storage Space

Storage	1 x 2.5" SATA HDD bay for SATA HDD
---------	------------------------------------

LCD

Display Type	12.1" TFT-LCD
Max. Resolution	800 x 600 / 1024 x 768 (optional)
Max. Color	262K / 16.2M
Luminance (cd/m ²)	450 / 500 (optional)
View Angle	160(H) / 150(V) 160(H) / 140(V) (optional)
Contrast	800:1 / 700:1 (optional)
Backlight Lifetime	50,000 Hrs

Touch screen – Resistive Touch Window

Interface	USB
Light transmission (%)	Over 80%

Touch screen – Projected Capacitive Type)

Interface	USB
Light transmission (%)	Over 90%



Power

Power input	9~36V DC
Power Consumption	MAX: 18.7W (OPC-5128) MAX: 19.5W (OPC-5128P)

Mechanical

Front Bezel	Flat Bezel Design(2mm, 3mm, 6mm)/Steel/Stainless Steel /Aluminum With System Power LED Light
Rear Bezel	Steel
IP Rating	IP65 compliant front panel
Dimension	323 x 263 x 54 mm
Net Weight	3.7 Kg

Environmental

Operating temperature(°C)	0~40°C without fan / 0~60°C with fan
Storage temperature(°C)	-20~60°C
Storage humidity	10 to 90% @ 40°C, non-condensing
Certification	CE/FCC class A

Operating System Support

Windows Embedded Compact 7, Windows Embedded Standard 7, Windows 7 Pro(FES),
Windows 7 Ultimate(FES), Windows Embedded 8.1 Industry Pro,
Windows 10 IoT 2016LTSC

Ordering information

OPC-5128-01	12.1" SVGA fanless open frame PC with AtomN2930 1.83G CPU, 4GB DDR3 RAM, Resistive touch screen, 9~36VDC input with adapter, steel enclosure
OPC-5128P-01	12.1" SVGA fanless open frame PC with AtomN2930 1.83G CPU, 4GB DDR3 RAM, Projected capacitive touch, 9~36VDC input with adapter, steel enclosure

V1.0-0

Industrial Panel PC

All specifications and photos are subject to change without notice.

All specifications and photos are subject to change without notice.

Industrial Panel PC

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660