



FPC-9108-P6-G3

Ruggedized Edge AI Computing Platform supporting NVIDIA® RTX-3090 GPU Card, Intel® 10th Gen Xeon® Core™ Processor with 6 GbE PoE



Features

- Intel 10th Gen (Comet Lake-S) with W480E chipset
- Supports NVIDIA® RTX-30 series up to 350W GPU(up to 334.6mm length)
- Wide Range DC power input (24~36V)
- HDMI x 1 +VGA x1 (2 independent display)
- Power on/off delay control/ Configurable ignition power control
- TPM2.0 support
- 2 x outside accessible SATA SSD, supporting RAID 0,1
- 2 x USB3.2 supports up to 10Gbps data transfer rate
- Front-accessible I/O support
- PWM FAN control support
- 6 x 802.3af Gigabit PoE ports
- 1 x M.2 (NGFF) B-Key(2242/3052/2280) socket for storage or 5G / LTE
- 1 x M.2 (NGFF) E-Key(2230) socket for WiFi / BT


Industrial Automation

System		Environmental	
CPU	10 th generation Intel® Xeon® Core™ i9/i7/i5/i3 processor in LGA1200 socket	Operating Temp.	80W TDP CPU : -20 ~ 50°C (-4 ~ 122°F) 65W TDP CPU : -20 ~ 55°C (-4 ~ 131°F) 35W TDP CPU : -20 ~ 70°C (-4 ~ 158°F) w/ NVIDIA® RTX-3090 : -20 ~ 45°C (-4 ~ 112°F)
Memory	2 x 260-pin DDR4 SO-DIMM sockets, supporting 2933 (i9/ i7 CPU)/2666(i5/ i3 CPU)/2400 MHz (Pentium/ Celeron CPU) SDRAM up to 64GB (ECC / Non-ECC)	Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Chipset	Intel® W480E	Operating Humidity	10 ~ 95% @ 50°C (non-condensing)
Graphics	Integrated Intel® HD Graphics	Vibration	Comply with MIL-STD-810G, Method 514.6, Category 4 w/ SSD
ATA	2 x Serial ATA ports with 600MB/s HDD transfer rate	Shock	Comply with MIL-STD-810G, Method 516.6, Table 516.6-II, 20G
LAN Chipset	1 x Intel® WGI225LM 2.5GigE LAN 1 x Intel® WGI219LM PCIe controllers w/ iAMT14.0 6 x Intel® WGI211AT PCIe controllers for PoE	Qualification	
Watchdog Timer	1~255 levels reset	Certification	CE, FCC Class A
I/O		Power Requirement	
Serial Port	2 x RS-232/422/485 configurable (default RS-232)	Main Power Input	DC 12~36V input (w/ 2-pin DC input terminal block)
USB Port	2 x USB 3.2 Gen2 (10Gbps) / 2.0 ports 2x USB 2.0	Secondary Power Input	DC 24-36V input (w/ 4-pin DC input terminal block for graphic cards power support)
LAN	2 x RJ-45 ports for GbE/2.5GbE 6 x RJ-45 ports for PoE (Power budget 60W)	Ignition Switch	2-pin terminal block: IGN, GND
Video port	1 x HDMI 1 x DB-15 female connector for Analog RGB	Storage	
Digital I/O	1x DB25 connector for DIO (8 in /8 out) port	Type	2 x 2.5" drive bays (outside accessible) 1 x M.2 B key (2242/3052/2280) w/ (PCIex2+USB3.0+SATA) interconnected with SIM for 5G/ LTE expansion or storage (either one)
Audio	Mic-in/Line-out	Mechanical	
Expansion Bus	1 x mini-PCI Express Slot interconnected with SIM card sockets for optional WiFi/BT/3G/LTE/GPS (PCIex1+USB2.0, Full Size) 1 x M.2 E key (2230) with PCIex1+USB2.0, for Wireless 1 x M.2 B key (2242/3052/2280) w/ (PCIex2+USB3.0+SATA) interconnected with SIM for 5G / LTE expansion or for storage (either one) 1 x PCIe x16 slot for 350W GPU card 3 x PCI slots	Construction	Metal
		Mounting	Wall-mount
		Weight	7.4 kg (16.31lb)
		Dimensions (W x D x H)	181 x 380 x 250 mm
		OS Support	
		Windows	10 IOT Enterprise 2019
		Linux	(Kernal 4.9)
		Ordering Information	
		FPC-9108-P6-G3	Ruggedized Edge AI Computing Platform supporting NVIDIA® RTX-3090 GPU Card, Intel® 10 th Gen Xeon® Core™ Processor with 6 x GbE PoE (Up to 80W TDP CPU)

All specifications are subject to change without notice.



Dimensions

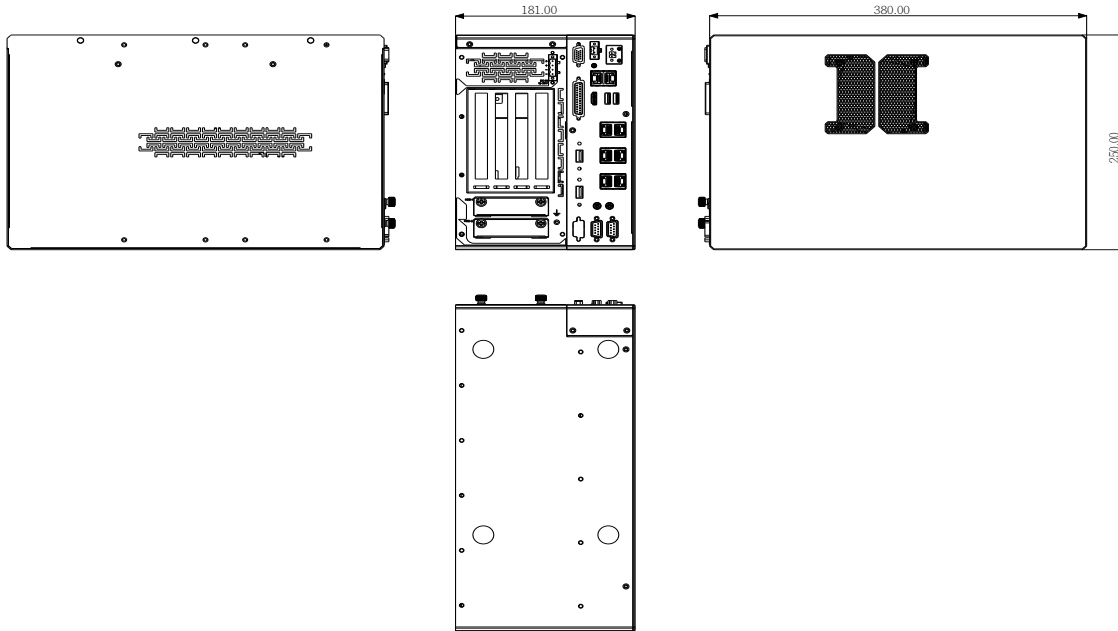

Optional Accessories

WMK-7000	Wall-mount kit for FPC-7XXX Series	
PAC-180W6C-FSP	180W AC/DC 24V adapter kit (For System)	
PAC-480W6C-MW	480W AC/DC 24V DIN Rail adapter kit (For GPU Box)	

Optional Configuration (CTOS* Kit)

MK-4C-4G/8G/16G/32G	DDR4-2400 4GB/8GB/16GB/32G(DDR4-2933) SDRAM DIMM kit	
WIFI-IN2550	Intel AX200NGW M.2 Wi-Fi 6 module w/ 2 x 30cm internal wires	
ANT-H11	1 x 2dBi HSUPA antenna	
ANT-D11	1 x WiFi dual-band 2.4G/5G antenna	
Xeon® W-1250E	Intel® Xeon® W-1250E processor, L2/12M, 3.5G	
Core™ i9-10900E	Intel® 10 th Gen. Core™ i9-10900E processor, L2/20M, 2.8G	
Core™ i9-10900TE	Intel® 10 th Gen. Core™ i9-10900TE processor, L2/20M, 1.8G	
Core™ i7-10700E	Intel® 10 th Gen. Core™ i7-10700E processor, L2/16M, 2.9G	
Core™ i7-10700TE	Intel® 10 th Gen. Core™ i7-10700TE processor, L2/16M, 2.0G	
Core™ i5-10500E	Intel® 10 th Gen. Core™ i5-10500E processor, L2/12M, 3.1G	
Core™ i5-10500TE	Intel® 10 th Gen. Core™ i5-10500TE processor, L2/12M, 2.3G	
Core™ i3-10100E	Intel® 10 th Gen. Core™ i3-10100E processor, L2/6M, 3.2G	
Core™ i3-10100TE	Intel® 10 th Gen. Core™ i3-10100TE processor, L2/6M, 2.3G	

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660