



DW SERIES

DW551DR4

55" Dual Side Digital Signage




3000 / 1000NITS
DUAL SIDED DESIGN



PORTRAIT &
LANDSCAPE



CEILING
SUSPENDED



FLOOR
MOUNTED



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan


65501 | V1.04

SPECIFICATION


MODEL	DW551DR4
LCD Panel Type	54.64 inches LCD (x2)
Native Resolution	1920 x 1080
Backlight	LED
Default Color Temperature	D65 (6500 K)
Brightness	1000 nits/ 3000 nits
Color Depth	8 bits
Contrast Ratio	3000:1
Response Time (Typ.)	9 ms
Viewing Angle (H/V)	178° / 178°
Light Life Time (Typ.)	100,000 hrs
Panel Surface	AR, 2H
Blackening Defect Free	Up to 110°C (230°F)
Viewable With Polarized Lenses	Yes
Power Supply	Internal
Rated Voltage	100-240V ~ 50/60Hz
Power On Mode (Typ./ Max)	240 W / 380 W
Power Saving Mode	< 1W
Bezel Width (T/B/L/R)	Even bezel 29.5 mm
Cabinet Color	Black
Monitor Dimension (LxHxD, w/o stand)	1272.8 x 743.3 x 62.7 mm
Monitor Weight	40 kg
Orientation	Portrait/ Landscape
Carring Handles	Yes
Language	English
Support SNMP (Up to V3.0)	Yes
Dimming Control	Yes
Proof of Image Retention	Yes
Auto Orientation Sensor	Yes
Ambient Light Sensor	Yes
Power On/Off Scheduling	Yes
Internal Temperature Sensor	Yes
OSD Menu Rotation	Yes
HDMI 1.4b (HDCP 1.4)	x2 (1080p)
Display Port 1.2	x2
DVI-D	x2
Micro SD Slot	x2 (For Internal Player)
USB 2.0	x2 (For Internal Player)
Audio	x2
RS-232	In x2
RJ-45	x2 (LAN)
Operating System	Android 7.1.2
Processor	ARM Quad-Core Cortex-A7
Clock Speed	1.2 GHz
Main Memory Interface	DDR3L-1066, 1GB
Graphics	Mali-400MP2 GPU, Support OpenGL ES1/2.0
Storage	Internal: Nand flash 8GB(multi sources) External: Support Micro SD, Up to 32GB
Multimedia	VP8/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz
Operating Temperature	0° C ~ 45° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS

DIMENSIONS

Unit: mm [inch]

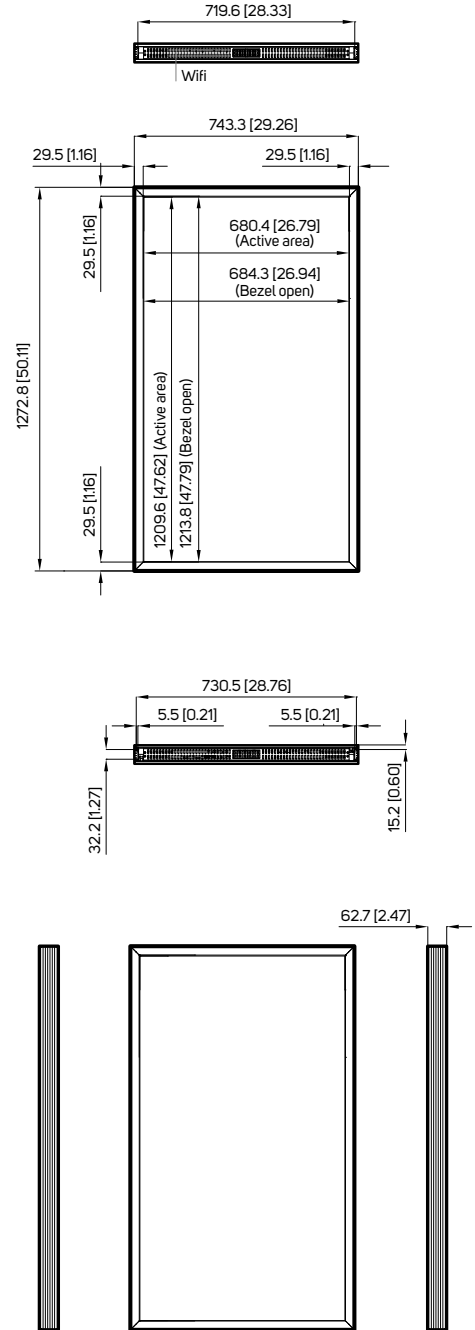

INTERFACE

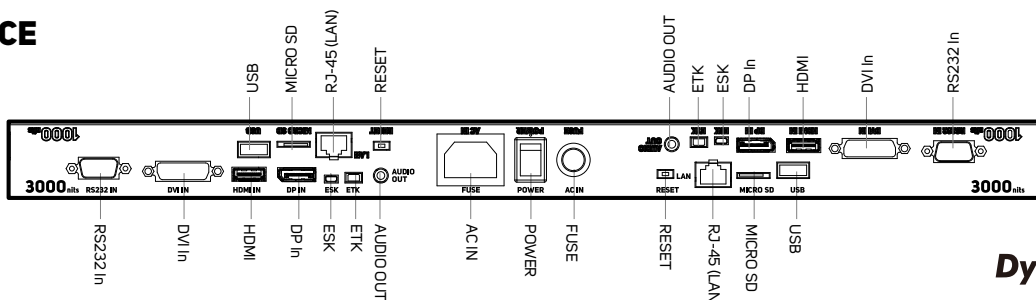

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660