

IN-VEHICLE Computing

VBOX-3611-POEX

Taiwan Patent No. M447854, M448011

Intel Gen6 Core i7-6600U CPU with 4 x POE Ports On-Board Computer

Features

- Intel Core i7-6600U
- Wireless support LTE w/ SIM Card, WLAN, GPS Dead Reckoning, BT (Option)
- 4 x Power Over Ethernet (POE)
- Smarter Vehicle Power Ignition for Variety Vehicle
- Dual Hot Swappable SATA Storage, RAID 0, 1, 5
- 1 x CAN Bus 2.0B (Optional)



POE



GPS



Wireless



Wide Range



Delay Time

Introduction

The VBOX-3611-POEX is powered by Intel Gen 6 Core i7-6600U with 4x POE ports In-Vehicle Computer, wireless support LTE, 3.5G w/ Dual SIM cards (Auto-switch). Additionally, it supports 9V - 36V DC Power Input. It can be operated in extreme weather conditions (Operating temperature: -40°C ~ 70 °C) and is suitable for railway station management and license plate recognition (LPR).

The VBOX-3611-POEX is designed for fleet management, mobile DVR, driver behavior record and in-vehicle digital signage. This technology enables us to offer a new in-vehicle component which can be applied as part of biometric systems and passenger information collection for user authentication purposes.


Specifications

System	
CPU	Intel Gen6 Core i7-6600U 2.6GHz up to 3.4GHz Intel Gen6 Core i5-6300U 2.4GHz up to 3.0GHz Intel Gen6 Core i3-6100U 2.3GHz Intel Gen6 Dual Core 3955U 2.0GHz
Memory	2 x DDR4 2133 MHz SO-DIMM up to 32GB
Chipset	Intel 6th Generation Core SoC Processor
LAN Chipset	Intel I210-AT Gb/s Ethernet Controllers Onboard Support PXE and WOL
Audio	Realtek ALC662 HD Codec Onboard
Watchdog	Watchdog Timer Support, Offer 1 – 255 Step
TPM	2.0
I/O	
Serial Port	3 x RS-232 (2 with RS-422/485 (Optional Max 4 x RS-232/422/485))
USB Port	2 x USB 3.0 Ports, 2 x USB 2.0 Ports
LAN	4 x M12 X-Code for GbE PoE (IEEE802.3af 15.4W per port)
Video Port	1 x DVI-I* , 1 x DP, 1, VGA (Support Triple Independent Display)
DIO Port	4 In and 4 Out
Audio	1 x Line-out and 1 x Mic-in (Line-in Optional)
SIM Card Socket	1 x SIM Card Socket Supported Onboard with eject * Use only with Single Link DVI Cables.
Graphics	
Graphics	Intel® HD Graphics 520 DirectX Video Acceleration (DXVA) for Accelerating Video Processing - Full AVC/VC1/MPEG2 HW Decode Supports DirectX 11/10.1/10/9 and OpenGL 4.0
Resolution	Max Resolution (HDMI1.4) : 4096x2304@24Hz Max Resolution (DP1.2) : 4096x2304@60Hz

Software	
Operating System	Win 10, Ubuntu 16.04 64bit
Environmental	
Operating Temp.	-40°C ~ 70°C, ambient w/ 0.6m/s airflow Patent No. : M448011 - Thermal Cooling
Storage Temp.	-40°C ~ 80°C
Relative Humidity	10% RH – 90% RH (non-condensing)
Vibration (with SSD)	IEC60068-2-64, random, 2.5G@5-500Hz, 1hr/axis MIL-STD-810G, Method 514.6, Procedure I, Cat.4, Operating
Shock	Operating: MIL-STD-810G, Method 516.6, Procedure I, Trucks and semi-trailers=15G (11ms) with SSD
Certifications	CE, FCC Class A, E-13
Storage	
Type	2 x 2.5" Drive Bay for SATA Type HDD/SSD RAID 0, 1, 5 1 x mSATA
Power Requirement	
Power Input	9V - 36V DC Power Input
Power Protection	Automatics Recovery Short Circuit Protection
Power Mgmt.	Vehicle Power Ignition for Variety Vehicle
Power Off Control	Power off Delay Time Setting by Software and BIOS
Battery (UPS)	Internal Battery Kit for 10 Mins Operating (Optional) *UPS backup time varies depending on actual overall system power consumption. Patent No. : M447854 - Build-in Battery
Mechanical	
Construction	Aluminum Alloy
Mounting	Supports Both of Wall-mount/VESA-mount
Weight	1980 g (Barebone)
Dimensions	250 x 150 x 55 mm

All specifications are subject to change without notice.

Dimensions

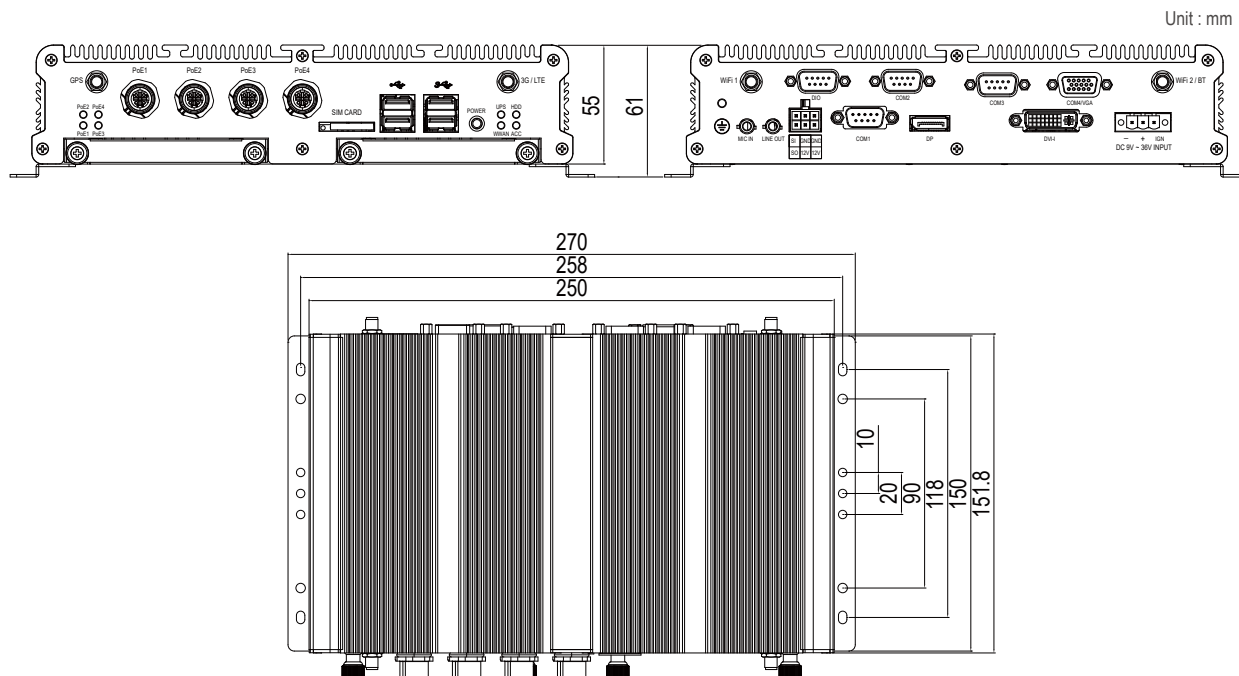

Please Scan The QR Code For More Information

Ordering Information

Part Number	VBOX-3611-POEX-i7, option for i5/i3/C1
Description	Intel Gen6 Core i7-6600U CPU with 4x POE Ports On-Board Computer
State of Origin	Made in Taiwan

Optional Accessories

DRAM	SO-DIMM max.DDR4-2133,4GB~32GB,0~70°C/-40~85°C
SATA SSD	2.5inch MLC/TLC 64GB~1TB 0~70°C/-40~85°C
mSATA	MLC 8G~128GB, 0~70°C/-40~85°C
Wifi	Wifi miniPCle card 802.3a/b/g/n/ac
Modem	LTE miniPCle card
GPS	GPS miniPCle card
CANBUS	CANBUS miniPCle card
Battery backup kit	BAT-3610 kit, 1150mAh 3S1P Battery kit (-30~60°C)
Power adapter	Power Adapter 24V/5.41A 130W Jack

All specifications are subject to change without notice.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660