



# SEMIL-2000 Series

2U 19"/2 rack mount IP69K waterproof computer supporting Intel® 14th / 13th/ 12th-Gen Core™ processor with 2x M12 10GbE and 4x M12 PoE+ ports



## Key Features

- IP69K waterproof computer
- -40°C to 70°C wide-temperature fanless operation
- 2x 10GbE, 1x GbE, and 4x 2.5GbE PoE+ via M12 X-coded connectors
- 2x SocketCAN and 2x USB3.2 Gen1 Type-C w/ DP alternative mode
- 8V to 48V wide-range DC input with reverse polarity protection and built-in ignition power control
- MIL-STD-810H compliant



CONTACT US

GET QUOTE

\*R.O.C Patent No. I697759  
\*CN Patent Pending

## Introduction

SEMIL-2000 is an extreme-rugged embedded platform with IP69K dustproof and waterproof design in a 2U 19"/2 rack-mount form factor. SEMIL-2000 features Neosys' best-in-class thermal design to ensure fanless operation from -40°C to 70°C wide-range temperatures, two 5Gbps Type-C ports with alternative DisplayPort signal outputs.

SEMIL-2000 is powered by Intel's 14th/ 13th/ 12th-Gen platform. The platform benefits from Intel® 7 photolithography, the latest Core™ desktop processors come with a hybrid configuration consisting of performance and efficient cores, and it can support up to 64GB DDR5 memory.

The system adopts a corrosion-proof stainless steel and aluminum chassis to counteract moisture and salinity. Utilizing all M12 connectors to guarantee extreme-rugged connection in shock and vibration environments, it offers a variety of I/O connectivity, two CAN bus 2.0 with SocketCAN driver, two USB 3.2, seven Ethernet (including two 10GbE), and four 802.3at PoE+ ports to supply 25.5W of power per port to connected compatible devices. Internal expansion-wise, it has an M.2 M-key socket to support NVMe SSD and mini-PCIe sockets for extending feature sets. Additionally, SEMIL-2000 features two 2.5" SATA SDD/ HDD accommodation, 8-48V wide-range DC input with ignition power control, and it is in compliance with MIL-STD-810H standards.

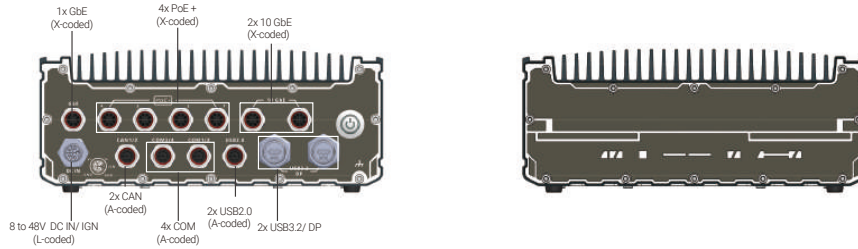
## Specifications

System Core		Expansion Bus	
Processor	Supporting Intel® 14th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mini PCI-E	3x full-size mini PCI Express socket with SIM slot
	- Intel® Core™ i9-14900/ i9-14900T	M.2	1x M.2 2242/3052 B key socket with dual SIM slot for M.2 5G/ 4G module 1x M.2 2230 E key socket for Wi-Fi
	- Intel® Core™ i7-14700/ i7-14700T	Power Supply	
	- Intel® Core™ i5-14500/ i5-14400/ i5-14500T	DC Input	8V to 48V DC input, with reverse polarity protection (M12 L-coded)
Processor	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Ignition Control	Built-in ignition power control (IGN/ GND signal via M12 L-coded connector)
	- Intel® Core™ i9-13900E/ i9-13900TE	Mechanical	
	- Intel® Core™ i7-13700E/ i7-13700TE	Dimension	220mm (W) x 310mm (D) x 90.5mm (H)
	- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE	Weight	6 kg
Processor	Supporting Intel® 12th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mounting	Rack-mounting (optional) and wall-mounting (standard)
	- Intel® Core™ i9-12900E/ i9-12900TE	Environmental	
	- Intel® Core™ i7-12700E/ i7-12700TE	Operating Temperature	<b>With 35W CPU</b> -40°C to 70°C <b>With CPU operating &gt;= 65W CPU</b> -40°C to 70°C (configured as 35W TDP mode) -40°C to 60°C (configured as 65W TDP mode)
	- Intel® Core™ i5-12500E/ i5-12500TE	Storage Temperature	-40°C ~85°C
Processor	- Intel® Core™ i3-13100E/ i3-13100TE	Humidity	10%~90% , non-condensing
	- Intel® Pentium® G7400E/ G7400TE	Vibration	MIL-STD-810H, 514.8C-IV, Category 4
	- Intel® Celeron® G6900E/ G6900TE	Shock	MIL-STD-810H, 516.8 Procedure I
		EMC	EN 50121 (EN 50155 EMC) CE/FCC Class A, according to EN 55032 & EN 55024
Chipset	Intel® Q670E platform controller hub	Ingress Protection	IP69K
Graphics	Integrated Intel® UHD Graphics 770 (32EU)		
Memory	Up to 64 GB DDR5 4800 SDRAM (two SODIMM slots)		
AMT	Supports Intel vPro/ AMT 16.0		
TPM	Supports dTPM 2.0		
I/O Interface			
Ethernet Port	2x 10GbE Ethernet by X550-AT2 (with WoL) (M12 X-coded) 4x 2.5GbE Ethernet by Intel I226-IT (PoE+) (M12 X-coded) 1x GbE Ethernet by Intel I219-LM (with WoL) (M12 X-coded)		
PoE+	4x IEEE 802.3at PoE+ PSE with 100 W total power budget		
CAN Bus	2x isolated CAN 2.0 port, supporting SocketCAN in Linux		
USB	2x Type-C USB 3.2 Gen1x1 (5Gbps) ports (shared DisplayPort) 2x USB 2.0 ports (M12 A-coded)		
Video Port	2x Type-C USB connector supporting DP output (shared USB3.2 Gen1x1)		
Serial Port	2x isolated 3-wire RS-232 ports (COM1/ COM2) 1x isolated 3-wire RS232 (COM3) & 1x RS-422/ 485 port (COM4)		
Storage Interface			
SATA HDD	2x Internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1		
M.2	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD		


SEMIL-2000 Series



**Appearance**



**Dimensions**

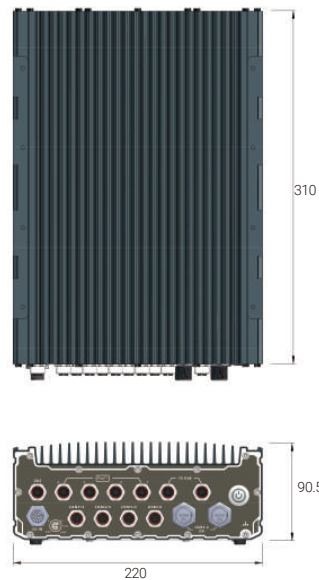

**Ordering Information**









Model No.	Product Description
SEMIL-2007	19"/2 rack mount IP69K waterproof computer supporting Intel® 14th/ 13th/ 12th-Gen Core™ processor with 2x M12 10GbE and 4x M12 PoE+ ports

**Optional Accessories**

PA-280W-CW6P-2P	280W AC-DC power adapter 24V 11.67A, 85~264VAC, -30~+70°C w/ Wafer FML6P to 2P End Terminal cable for AWP/SEMIL
PA-600W-C4PY-4P	600W AC-DC power adapter 24V 25A, 85~264VAC, -20~+70°C, w/ 4PY Terminal to 4P End Terminal cable for AWP/SEMIL
JPlate-SL	Joint plate for dual SEMIL assembly (for SEMIL-2000)
Rmkit-SL	Rack mount for single SEMIL (for SEMIL-2000)

All specifications and photos are subject to change without prior notice

## SEMIL-2000 Series

Type	Model Name	Description
	Cbl-TpCPlug-DPM-1M	TypeC Male Plug to DP Male Cable, Length : 1M
	Cbl-TpCPlug-U3TA-50CM	TypeC Male Plug to USB3.0 Type-A FML, Length: 50CM
	Cbl-TpCPlug-UTpCF-50CM	TypeC Male Plug to USB Type-C FML Cable, Length : 50CM
	Cbl-M12X8M-RJ45-500CM	M12(8-pole-X-coded) to RJ45, CAT6, Length : 500CM
	Cbl-M12A8M-2U2TA-180CM1	M12 (8-pole-A-coded) to 2xUSB 2.0 type A (female), Length: 180CM
	Cbl-M12A8M-2DB9M_OW2-180CM1	M12 A-Code Male 8P to x2 DB9 Male+2P, Length: 180CM
	Cbl-M12A8M-2DB9M-180CM	M12 (8-pole-A-coded male) to 2x DB9 male, Length: 180CM
	Cbl-M12L5F-CordEnd5-180CM	M12 L-Code 5P(FML) to Cord End Terminal 5P, Length: 1.8M

### Cable Kit

SEMIL-2000 M12 cable kit		
Cblkit-M12-SEMIL2000	7x Cbl-M12X8M-RJ45-500CM	1x Cbl-M12A8M-2U2TA-180CM1
	2x Cbl-M12A8M-2DB9M_OW2-180CM1 (COM1/2 & CAN1/2)	1x Cbl-M12A8M-2DB9M-180CM (COM3/4)
	1x Cbl-M12L5F-CordEnd5-180CM	

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660