




AMD Ryzen™ Embedded R1000 Series 1.8" SBC




GHF51

AMD

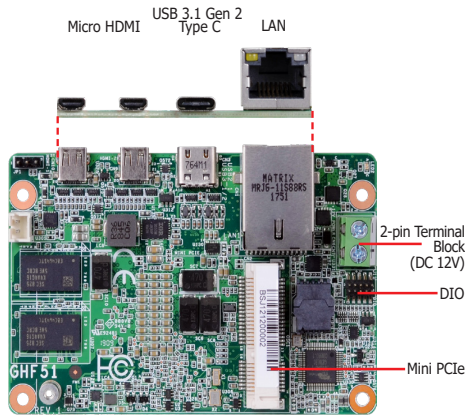

Top View

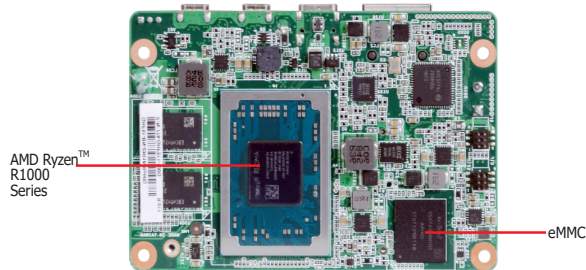


Bottom View

Features


- Small form factor 1.8" SBC for space-limited applications
- Single Channel DDR4 Memory Down up to 4GB/8GB
- HDMI 1.4 resolution supports up to 4096x2160 @ 60Hz
- Expansion and Storage: 1 Mini PCIe, 1 SMBus
- Rich I/O: 1 Intel GbE, 1 USB 3.1 Gen 2, 2 Micro HDMI



Mechanical Drawing

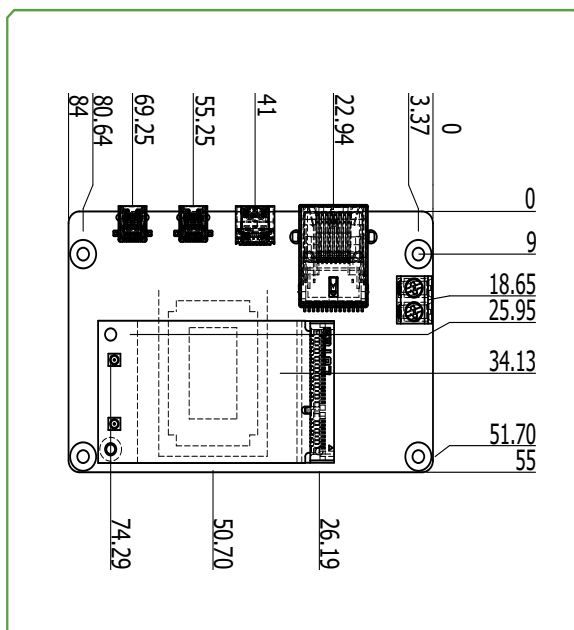

Block Diagram

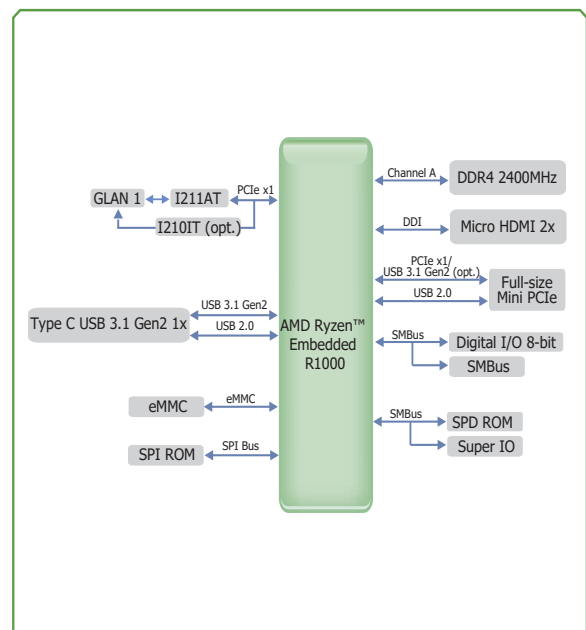



Specifications

SYSTEM	Processor	AMD® Ryzen™ Embedded R1606G, Dual Core, 1MB Cache, 3 CU, 2.6GHz (3.5GHz), 12W AMD® Ryzen™ Embedded R1505G, Dual Core, 1MB Cache, 3 CU, 2.4GHz (3.3GHz), 12W AMD® Ryzen™ Embedded R1305G, Dual Core, 3 CU, 1.5GHz (2.8GHz), 8-10W (Coming soon) AMD® Ryzen™ Embedded R1102G, Dual Core, 3 CU, 1.2GHz (2.6GHz), 6W (Coming soon)		
	Memory	DDR4 Memory Down up to 4GB/8GB		
	BIOS	Single Channel DDR4 2400MHz		
GRAPHICS	Controller	AMD Vega GPU with up to 3 computing units.		
	Feature	H.265 decode/encode support, VP9 decode		
	Display	2 x Micro HDMI		
EXPANSION	Interface	HDMI 1.4: resolution up to 4096x2160 @ 24Hz		
ETHERNET	Controller	1 x Full-size Mini PCIe (PCIe Gen2/USB 2.0, opt: USB 3.1 Gen2/USB 2.0)		
	Controller	1 x Intel® I211AT PCIe (10/100/1000Mbps) or 1 x Intel® I210IT PCIe (10/100/1000Mbps) (available upon request)		
REAR I/O	Ethernet	1 x GbE (RJ-45)		
	USB	1 x Type C USB 3.1 Gen 2		
	Display	2 x Micro HDMI (HDMI 1.4)		
INTERNAL I/O	DIO	1 x 8-bit DIO		
	SMBus	1 x SMBus		
STORAGE	eMMC	1 x 16GB/32GB/64GB eMMC		
WATCHDOG TIMER	Output & Interval	Software Reset, Programmable via Software from 1 to 655,535 Seconds		
SECURITY	TPM	fTPM 2.0		
POWER	Type	Single 12V +/-5% DC		
	Connector	2-pin Terminal Block		
	Consumption	Typical: R1505G: 12V @ 0.37A (4.44W) Max: R1505G: 12V @ 1.74A (20.88W)		
	RTC Battery	CR2032 Coin Cell		
OS SUPPORT (UEFI Only)	Microsoft/Linux	Windows 10 IoT Enterprise 64-bit		
ENVIRONMENT	Linux			
	Temperature	Operating: 0 to 60°C/ -20 to 70°C(opt.) Storage: -40 to 85°C		
	Humidity	Operating: 5 to 90% RH		
	MTBF	Storage: 5 to 90% RH		
MECHANICAL	Dimensions	TBD		
	Height	1.8" SBC Form Factor		
	Height	84mm (3.31") x 55mm (2.17") PCB: 1.60mm		
		Top Side: 13.8mm, Bottom Side: 2.00mm		

Ordering Information

Model Name	P/N	Processor	Memory	eMMC	Display	GbE	USB 3.1 Gen 2	Power	Thermal	Temp.
GHF51-BN-43R15	770-GHF511-000G	R1505G	4 GB	32 GB	2 Micro HDMI	1	1	12VDC	Fanless	0 to 60°C
GHF51-BN-43R16	770-GHF511-100G	R1606G	4 GB	32 GB	2 Micro HDMI	1	1	12VDC	Fanless	0 to 60°C

Packing List

• 1 GHF51 board	
• 1 Heat spreader (Height: 11mm)	A71-808322-000G

Optional Items

• 2 pole terminal to DC Jack cable	A81-004013-000G
• Power adapter (60W, 12V, DC jack)	671-106012-000G
• 1 Heat sink (Height: 29mm)	A71-008127-000G

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660