
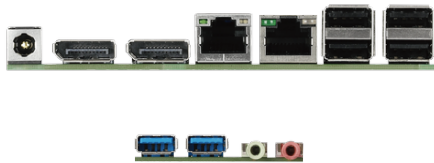


Preliminary

# STX-1000

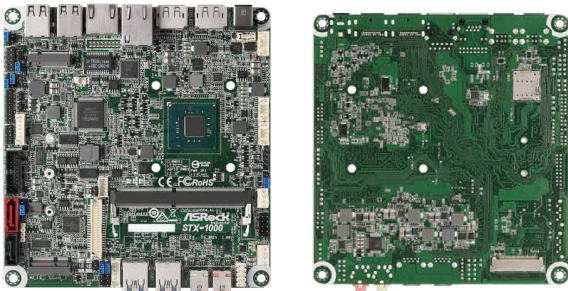

## Key Features

- Intel® Gemini Lake SoC Processor
- STX-1000D (J5005)
- STX-1000J (J4015)
- STX-1000B (J4005)
- Supports Single Channel DDR4 SO-DIMM 2400 MHz, up to 8GB
- 2 x DisplayPort, 1x eDP or LVDS
- 4 x USB 3.1, 5 x USB 2.0, 2 x SATA3, 2 x COM
- 1 x M.2 Key B, 1 x M.2 Key E
- 1 x Intel LAN, 1 x Realtek LAN
- 1 x TPM Header
- +9~24V DC-in (DC Jack/ 4-pin ATX PWR Con)

## Specifications

### Processor System

Dimensions	Mini-STX (5.5-in x 5.8-in)
CPU	STX-1000B : Intel® Celeron® Processor J4005,DC,2.0GHz,10W STX-1000J : Intel® Celeron® Processor J4105,QC,1.5GHz,10W STX-1000D :Intel® Pentium® Silver Processor J5005,QC,1.5GHz,10W
Chipset	SoC

### Expansion Slot

PCIe	N/A
Mini-PCIe	N/A
M.2	1 x M.2 (Key B, 2242/2260/2280) with PCIe x1 ( or USB 3.0 optional ), USB 2.0 and SATA3 1 x M.2 (Key E, 2230) with PCIe x1, CNVi and USB 2.0 for WiFi+BT
mSATA	N/A

### Memory

Technology	Single Channel DDR4 2400 MHz
Max	8GB
Socket	1 x SO-DIMM

### Graphics

GPU	Intel® UHD Graphics(By CPU)
VGA	N/A
LVDS	Dual channel 24 bit, max. resolution up to 1920x1200@60Hz
eDP	eDP 1.4 (share with LVDS) with max. resolution up to 4096x2160@60Hz
HDMI	N/A
DVI	N/A
DisplayPort	DisplayPort++ 1.2 with max. resolution up to 4096x2160@60Hz
Multi Display	Triple Display

### Ethernet

Controller/ Speed	LAN1: Intel I210AT with 10/100/1000 Mbps LAN2: Realtek RTL8111G/RTL8111H-CG with 10/100/1000Mbps
Connector	2 x RJ-45

### Front I/O

USB	2 x USB 3.1
Audio Jack	2 (Mic-in, Line-out)

### Rear I/O

VGA	N/A
DVI	N/A
HDMI	N/A
DisplayPort	2 x DP1.2
Ethernet	2
USB	4 x USB 2.0
Serial	N/A
PS/2	N/A

### Internal Connector

USB	1 x USB 2.0, 2 x USB 3.1
LVDS	1 (shared with eDP)
eDP	1 (shared with LVDS)
VGA	N/A
Serial	1 x COM(RS-232), 1 x COM(RS-232/422/485)
SATA	2 x SATA3(one is shared with M.2 Key B)
Parallel	N/A
GPIO	4 x GPI + 4 x GPO
SATA PWR Output Con	1
Speaker Header	1
TPM	1 x Header (SPI)

### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 segments, 0,1,2...255sec/min

### Power Requirements

Input PWR	+9~24V DC-in (DC Jack/ 4-pin ATX PWR Con)
Power On	AT/ATX supported AT : Directly PWR on as Power input ready ATX: Press Button to PWR On after Power input ready

### Environment

Temperature	0°C~60°C
Storage Temperature	-40°C~85°C
Operating Humidity	5% - 90%
Storage Humidity	5% - 90%

The specification is subject to change without notice. The brand and product names are trademarks of their respective companies. Any configuration other than original product specification is not guaranteed.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660