




Isolated Process Control Signal Conditioning Products

SCM7B

SCM7B

Isolated Process Control Signal Conditioning Products

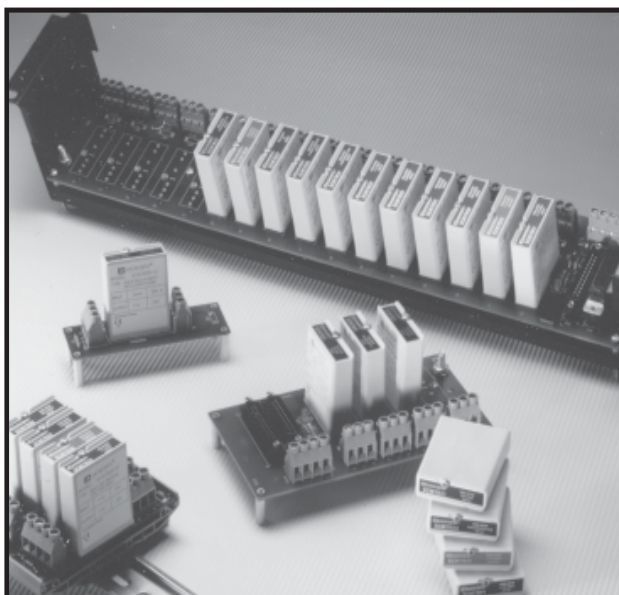

SCM7B Modules

SCM7B Isolated Process Control Signal Conditioning modules include a complete selection of backpanels, DIN rail mounting accessories, interface cables, and rack mounting hardware. Each SCM7B module provides a single channel of isolated analog input or output. Various input modules accept analog voltage or current signals from all types of field sensors and sources, filter, isolate, amplify, linearize, and convert these input signals to high-level analog outputs suitable for use in a process control system. Output modules accept high-level analog voltage signals from a process control system, then buffer, isolate, filter, and amplify before providing a current or voltage output to a field device.

► Features

- $\pm 0.03\%$ Accuracy (Typical)
- $\pm 0.01\%$ Linearity
- 1500Vrms Transformer Isolation & 120Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- Wide Supply Voltage, 14 to 35VDC
- 5-Pole Low-Pass Filtering
- Low Peak and RMS Noise
- Low Drift Input Circuitry for Long-Term Stability
- Up to 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature
- Backpanels Allow Use of Industry Standard Digital I/O, Solid State Relay Modules
- DIN Rail Mounting
- CSA C/US Certified (Class I, Division 2, Groups A, B, C, D)
- CE and ATEX Compliant
- Manufactured per RoHS Directive 2002/95/EC

Custom Signal Conditioning

Custom modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.

► SCM7B Selection Guide

ISOLATED VOLTAGE INPUT MODULES Page 68

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B21	$\pm 10\text{V}$	$\pm 10\text{V}$
SCM7B30-01	0 to $+10\text{mV}$	†
SCM7B30-02	0 to $+100\text{mV}$	†
SCM7B30-03	0 to $+1\text{V}$	†
SCM7B30-05	$+1$ to $+5\text{V}$	†
SCM7B30-06	$\pm 10\text{mV}$	†
SCM7B30-07	$\pm 100\text{mV}$	†
SCM7B30-08	$\pm 1\text{V}$	†
SCM7B31-01	0 to $+10\text{V}$	†
SCM7B31-02	$\pm 5\text{V}$	†
SCM7B31-03	$\pm 10\text{V}$	†
SCM7B31-04	0 to $+5\text{V}$	†
SCM7B31-05	0 to $+20\text{V}$	†
SCM7B31-06	$\pm 20\text{V}$	†
SCM7B31-07	0 to $+50\text{V}$	†
SCM7B31-08	$\pm 50\text{V}$	†

ISOLATED BIPOLAR VOLTAGE OUTPUT MODULES Page 70

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B22	$\pm 10\text{V}$	$\pm 10\text{V}$ OF SPAN

ISOLATED PROCESS CURRENT INPUT MODULES Page 72

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B32-01	4 to 20mA	†
SCM7B32-02	0 to 20mA	†

ISOLATED PROCESS VOLTAGE INPUT MODULES Page 72

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B33-01	$+1$ to $+5\text{V}$	†
SCM7B33-02	0 to $+5\text{V}$	†

ISOLATED LINEARIZED 100Ω Pt RTD INPUT MODULES ** Page 74

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B34-01	-100°C to $+100^{\circ}\text{C}$ (-148°F to $+212^{\circ}\text{F}$)	†
SCM7B34-02	0°C to $+100^{\circ}\text{C}$ ($+32^{\circ}\text{F}$ to $+212^{\circ}\text{F}$)	†
SCM7B34-03	0°C to $+200^{\circ}\text{C}$ ($+32^{\circ}\text{F}$ to $+392^{\circ}\text{F}$)	†
SCM7B34-04	0°C to $+600^{\circ}\text{C}$ ($+32^{\circ}\text{F}$ to $+1112^{\circ}\text{F}$)	†
SCM7B34-05	-50°C to $+350^{\circ}\text{C}$ (-58°F to $+662^{\circ}\text{F}$)	†

ISOLATED LINEARIZED 120Ω Ni RTD INPUT MODULES ** Page 74

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B34N-01	0°C to $+300^{\circ}\text{C}$ ($+32^{\circ}\text{F}$ to $+572^{\circ}\text{F}$)	†
SCM7B34N-02	0°C to $+200^{\circ}\text{C}$ ($+32^{\circ}\text{F}$ to $+392^{\circ}\text{F}$)	†



► **SCM7B Selection Guide (Continued)**

SCM7B

ISOLATED 2-WIRE XMTR INTERFACE MODULES WITH LOOP POWER Page 76

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B35-01	4 to 20mA	†
SCM7B35-02	4 to 20mA	+2 to +10V

ISOLATED POTENTIOMETER INPUT MODULES Page 78

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B36-01	0 to 100Ω	†
SCM7B36-02	0 to 200Ω	†
SCM7B36-03	0 to 500Ω	†
SCM7B36-04	0 to 1kΩ	†
SCM7B36-05	0 to 5kΩ	†
SCM7B36-06	0 to 10kΩ	†

ISOLATED THERMOCOUPLE INPUT MODULES Page 80

MODEL	TYPE [†]	INPUT RANGE	OUTPUT RANGE
SCM7B37J-01	J	-100°C to +760°C (-148°F to +1400°F)	†
SCM7B37J-10	J	0°C to +200°C (+32°F to +392°F)	†
SCM7B37J-11	J	0°C to +400°C (+32°F to +752°F)	†
SCM7B37J-12	J	0°C to +600°C (+32°F to +1112°F)	†
SCM7B37J-13	J	+300°C to +600°C (+572°F to +1112°F)	†
SCM7B37K-02	K	-100°C to +1350°C (-148°F to +2462°F)	†
SCM7B37K-20	K	0°C to +300°C (+32°F to +572°F)	†
SCM7B37K-21	K	0°C to +600°C (+32°F to +1112°F)	†
SCM7B37K-22	K	0°C to +1200°C (+32°F to +2192°F)	†
SCM7B37K-23	K	+600°C to +1200°C (+1112°F to +2192°F)	†
SCM7B37T-03	T	-100°C to +400°C (-148°F to +752°F)	†
SCM7B37E-04	E	0°C to +900°C (+32°F to +1652°F)	†
SCM7B37R-05	R	0°C to +1750°C (+32°F to +3182°F)	†
SCM7B37S-06	S	0°C to +1750°C (+32°F to +3182°F)	†
SCM7B37B-07	B	0°C to +1800°C (+32°F to +3272°F)	†

ISOLATED PROCESS CURRENT OUTPUT MODULES Page 82

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B39-01	+1 to +5V	4 to 20mA
SCM7B39-02	0 to +10V	0 to 20mA
SCM7B39-03	0 to +10V	4 to 20mA
SCM7B39-04	4 to 20mA	4 to 20mA

ISOLATED VOLTAGE INPUT MODULES, WIDE BANDWIDTH Page 84

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B40-02	0 to +100mV	†
SCM7B40-03	0 to +1V	†
SCM7B40-07	±100mV	†
SCM7B40-08	±1V	†
SCM7B41-01	0 to +10V	†
SCM7B41-02	±5V	†
SCM7B41-03	±10V	†
SCM7B41-04	0 to +5V	†
SCM7B41-05	0 to +20V	†
SCM7B41-06	0 to +40V	†

ISOLATED LINEARIZED THERMOCOUPLE INPUT MODULES Page 86

MODEL	TYPE [†]	INPUT RANGE	OUTPUT RANGE
SCM7B47J-01	J	0°C to +760°C (+32°F to +1400°F)	†
SCM7B47J-02	J	-100°C to +300°C (-148°F to +572°F)	†
SCM7B47K-03	K	0°C to +1300°C (+32°F to +2372°F)	†
SCM7B47K-04	K	0°C to +600°C (+32°F to +1112°F)	†
SCM7B47T-05	T	0°C to +400°C (+32°F to +752°F)	†
SCM7B47T-06	T	-100°C to +200°C (-148°F to +392°F)	†
SCM7B47E-07	E	0°C to +900°C (+32°F to +1652°F)	†
SCM7B47R-08	R	+500°C to +1750°C (+932°F to +3182°F)	†
SCM7B47S-09	S	+700°C to +1750°C (+1292°F to +3182°F)	†
SCM7B47B-10	B	+800°C to +1800°C (+1472°F to +3272°F)	†
SCM7B47N-11	N	+200°C to +1300°C (+392°F to +2372°F)	†

ACCESSORIES Page 89

MODEL	DESCRIPTION
SCM7BXEV	1 channel evaluation backpanel
SCM7BP01	1 channel backpanel
SCM7BP02	2 channel backpanel
SCM7BP01-DIN	SCM7BP01 with DIN rail mounting option
SCM7BP02-DIN	SCM7BP02 with DIN rail mounting option
SCMXBEFE	DIN Base element with snap foot
SCMXBE	DIN Base element without snap foot
SCMXSE	DIN Side elements
SCMXVS	DIN Connection pins
SCMXRAIL1-XX	DIN EN 50022-35x7.5 (slotted steel), length -XX in meters
SCMXRAIL2-XX	DIN EN 50035-G32 (slotted steel), length -XX in meters
SCMXRAIL3-XX	DIN EN 50022-35x15 (slotted steel), length -XX in meters
SCM7BP04	4 channel backpanel
SCM7BP04-DIN	SCM7BP04 with DIN rail mounting option
SCM7BP08	8 channel backpanel
SCM7BP08-DIN	SCM7BP08 with DIN rail mounting option
SCM7BP16	16 channel backpanel
SCM7BP16-DIN	SCM7BP16 with DIN rail mounting option
SCMXRK-002	19" rack for mounting backplanes
SCM7BXCA01	6" system adapter cable (DB25F to 26M)
SCM7BXCA02	3" system interface cable (DB25F to DB25F)
SCMXCA004-XX	xx-meter system interface cable (26F to 26F)
SCMXCA006-XX	System interface cable for backpanels
8BXIF	DB25 to screw terminal interface board
SCM7BXR1	250Ω current conversion resistor
SCM7BPT	Non-isolated signal pass thru module
SCM7B-PROTO	Breadboard kit

[†]OUTPUT RANGES AVAILABLE

Output Range	Part No. Suffix	Example
+1 to +5V	NONE	SCM7B30-01
0 to +5V	A	SCM7B30-01A
0 to +10V	D	SCM7B30-01D

POWER SUPPLIES Page 226

PWR-PS5RA	Power Supply, 24V, 0.3A, 100-240VAC Input
PWR-PS5RB	Power Supply, 24V, 0.6A, 100-240VAC Input
PWR-PS5RC	Power Supply, 24V, 1.3A, 100-240VAC Input
PWR-PS5RD	Power Supply, 24V, 2.1A, 100-240VAC Input
PWR-PS5RE	Power Supply, 24V, 4.2A, 100-240VAC Input

[†]THERMOCOUPLE ALLOY COMBINATIONS

STANDARDS: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

TYPE	MATERIAL
J	Iron vs. Copper-Nickel
K	Nickel-Chromium vs. Nickel-Aluminum
T	Copper vs. Copper-Nickel
E	Nickel-Chromium vs. Copper-Nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium
N	Nickel-14.2% Chromium-1.4% Silicon vs. Nickel-4.4% Silicon- 0.1% Magnesium

****RTD STANDARDS**

TYPE	ALPHA COEFFICIENT	DIN	JIS	IEC
100Ω PT	0.00385	DIN 43760	JIS C 1604-1989	IEC 751
120Ω NI	0.00672			

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660