

# AGS-7230-AC-T-US

Industrial Dual Radio 802.11a/b/g/n/ac WiFi Access Point/Client/Bridge/Repeater with Router and Modbus Gateway Capabilities; EOT: -30°C ~ 70°C for US applications



## Features

- ▶ Built-in 802.11ac/n WiFi uplink for wireless M2M application
- ▶ Equipped 802.11n/ac 2T2R 5GHz and 2.4G/5GHz selectable WiFi access point
- ▶ Multiple (8) SSIDs for privilege group devices or users
- ▶ 4\*GE LAN port with tag based VLANs easily to group control and relocate traffic pattern
- ▶ Equipped with RS232/RS485 interface for Modbus RTU/ASCII and various serial communication protocol, and DI/DO for device triggering or event reporting
- ▶ Equipped with multi-mode data logging function, which stores the collected logs on attached storage for SCADA telemetry
- ▶ Equipped with a comprehensive range of protocols, such as NAT, Routing, and IPv6
- ▶ Featuring various VPN technologies, such as IPSec and OpenVPN, supporting up to 16 concurrent IPSec tunnels with max 100Mbps throughput
- ▶ Embedded with SPI firewall and IPS function, which prevents from cyber-attacks
- ▶ SNMP, Telnet & SSH via the CLI, and TR-069 for remote management
- ▶ QoS and Bandwidth management for optimal bandwidth usage
- ▶ Seamless power failover between redundant DC 12V~48V wide range power input
- ▶ 5-Year Warranty


## INTRODUCTION

Antaira Technologies' AGS-7230-AC-T-US is an industrial wireless gateway that is loaded with luxuriant security features including VPN, firewall, NAT, port forwarding, DHCP server, and many other powerful features for outdoor IP surveillance applications. The redundancy design is in the fallback 12~48VDC power terminal.

With built-in 802.11ac/n compliant single band or dual-band WiFi module, you just need to find out an available wireless network (or Access Point), and the WiFi VPN Gateway can simply connect to the wireless network and connect your filed devices to the local management center. By VPN tunneling technology, remote sites easily become a part of the Intranet, and all data are transmitted in a secure (256-bit AES encryption) link. The feature of DI/DO allows the gateway to have real-time response whenever events are detected by sensors.


For wireless M2M (Machine-to-Machine) applications, the AGS-7230-AC-T-US is absolutely the right choice.

## DIAGRAM

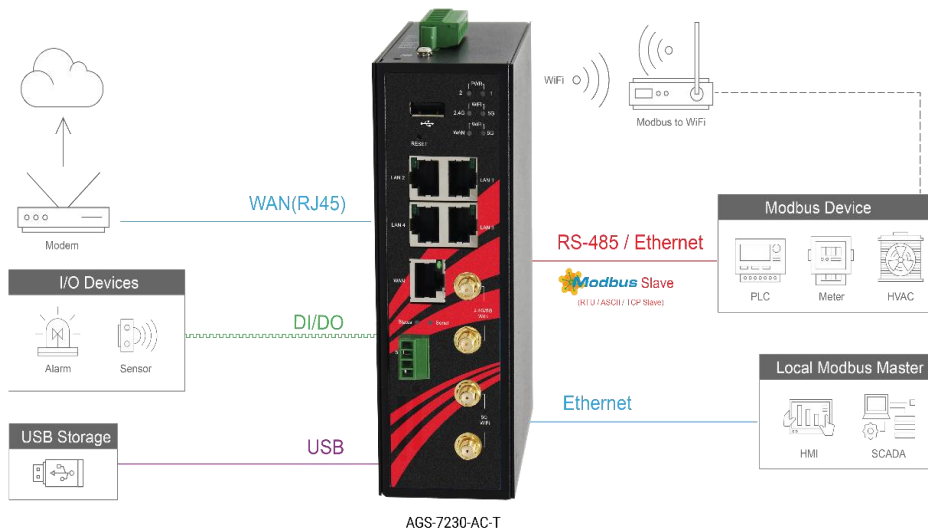

## DIMENSIONS

Unit: mm (inch)

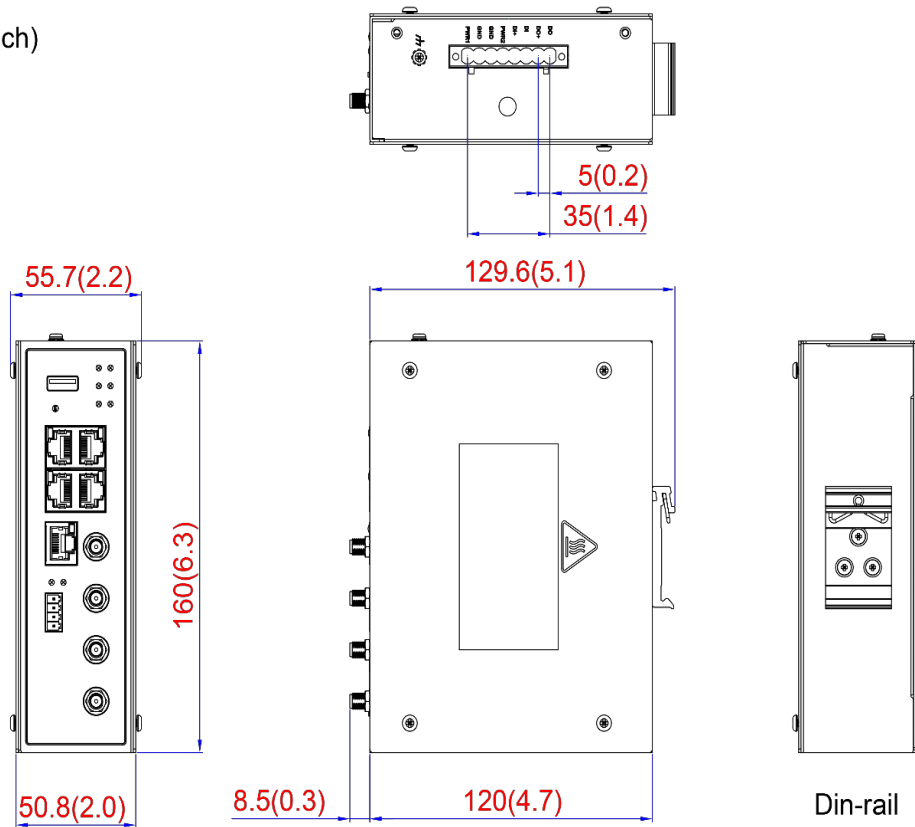

## SPECIFICATIONS

| Device Interfaces            |   |
|------------------------------|---|
| <b>Uplink</b>                | 11ac (5GHz) and 11n (2.4GHz) WiFi Uplink<br>1*RJ45 GE (Configurable)                      |
| <b>LAN-RJ45</b>              | 4*RJ45 GE   |
| <b>LAN-WiFi</b>              | 802.11a/b/g/n/ac 2T2R (2.4G/5GHz selectable)  |
| <b>Comm. Bus</b>             | 1*RS232/RS485 (4-pin Terminal Block)  |
| <b>I/O</b>                   | 1*DI ("Logic 0": 0~2V, "Logic 1":5V~30V), 1*DO (Relay Mode, up to 30V / 1A)               |
| <b>Log Storage</b>           | 1*USB 2.0   |
| <b>Antenna</b>               | 2*SMA Jack (M) for ext. WiFi Ant. (5GHz)<br>2*SMA Jack (M) for ext. WiFi Ant. (2.4G/5GHz) |
| <b>Power Source</b>          | Dual DC 12V~48V   |
| WAN Functions                |   |
| <b>WAN</b>                   | Multiple WANs, Load Balance, Configurable Ethernet  |
| <b>WiFi</b>                  | 11ac 2T2R and 11n 2T2R WiFi Uplink  |
| <b>Ethernet</b>              | Dynamic IP, Static IP, PPPoE, PPTP, L2TP  |
| <b>IPv6</b>                  | Static IPv6, DHCPv6, PPPoEv6  |
| Basic Functions              |   |
| <b>Ethernet</b>              | LAN IP, Subnet Mask   |
| <b>WiFi Operation</b>        | AP Router, WDS only, WDS Hybrid Modes   |
| <b>WiFi Security</b>         | WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, 802.1x   |
| <b>VLAN</b>                  | Port-based, Tag-based   |
| <b>Port Forwarding</b>       | Virtual Server / Computer, DMZ Host Pass-through: PPTP/L2TP/IPSec                         |
| <b>Routing</b>               | Static and Dynamic: RIPv1/v2, OSPF, and BGP   |
| <b>QoS</b>                   | Policy-based Bandwidth Control and Packet Flow Prioritization                             |
| Field Communication          |   |
| <b>Virtual COM</b>           | RFC2217, TCP Client, TCP Server, UDP  |
| <b>Modbus</b>                | Modbus Gateway for Modbus TCP<br>Master/Slave, Modbus RTU/ASCII<br>Master/Slave Access    |
| <b>Data Logging</b>          | Sniffer, Off-line Proxy, Full-Time Proxy, Sniffer & Proxy mixed modes                     |
| Security                     |   |
| <b>VPN Tunneling</b>         | IPSec, OpenVPN, Tunneling with Full Tunnel, Tunnel Failover                               |
| <b>IPSec Tunnel Scenario</b> | Site to Site, Site to Host, Host to Site, Host to Host                                    |
| <b>Firewall</b>              | SPI Firewall with Stealth Mode, IPS   |
| <b>Access Control</b>        | MAC Control   |

| Service                               |   |
|---------------------------------------|---|
| <b>Event Handling</b>                 | Managing / Notifying Events; DO, SMS, Modbus, Syslog, SNMP Trap (v1/v2c), Email Alert, Remote Host, and MQTT  |
| Administration                        |   |
| <b>Configuration &amp; Management</b> | Web, Telnet & SSH via the CLI, SNMP (v1/v2c/v3) & Private MIB   |
| <b>System Operation</b>               | MMI, System Info., System Time / Log, Backup & Restore, Reboot & Reset  |
| <b>FTP</b>                            | FTP Server, User Account  |
| <b>Diagnostic</b>                     | Packet Analyzer, Diagnostic Tools   |
| Mechanical Characteristics            |   |
| <b>Housing</b>                        | Metal, IP30 protection  |
| <b>Dimensions</b>                     | 62x125x160mm (without mounting kit)<br>62x135x160mm (with DIN Rail kit)   |
| <b>Weight</b>                         | 3.44 lbs.   |
| <b>Mounting</b>                       | DIN-Rail Mounting, Wall Mounting  |
| Environmental Limits                  |   |
| <b>Operation Temperature</b>          | -30°C ~ 70°C  |
| <b>Storage Temperature</b>            | -40°C ~ 85°C  |
| <b>Humidity</b>                       | 10% ~ 95% (non-condensing)  |
| Standards & Regulation                |   |
| <b>EMI</b>                            | EN 55032: 2015 +AC: 2016 Class B<br>EN 61000-3-2:2014<br>EN 61000-3-3:2013<br>EN 55024:2010+A1:2015<br>EN 61000-6-2:2005+AC:2005<br>IEC 61000-4-2 (ESD) Level 4<br>IEC 61000-4-3 (RS) Level 3<br>IEC 61000-4-4 (EFT) Level 4<br>IEC 61000-4-5 (Surge) Level 3<br>IEC 61000-4-6 (CS) Level 3<br>IEC 61000-4-8 (PFMF) Level 4 |
| <b>EMS</b>                            | EN 301 489-1/-7/-17/-24/-52<br>EN 300 328 V2.1.1<br>EN 301 893 V1.8.1, EN 50385   |
| <b>Radio</b>                          | EN 300 328 V2.1.1<br>EN 301 893 V1.8.1, EN 50385  |
| <b>Safety</b>                         | EN 60950-1  |
| Certification                         |   |
| <b>Approval / Certificate</b>         | FCC, CE   |
| <b>Warranty</b>                       | 5 Years   |
| Notes                                 |   |

1. Specifications are subject to change without prior notice.
2. Supported cellular frequency depends on regional hardware version.

## ORDERING INFO

AGS-7230-AC-T-US

Industrial Dual Radio 802.11a/b/g/n/ac WiFi Access Point/Client/Bridge/Repeater with Router and Modbus Gateway Capabilities; EOT: -30°C ~ 70°C for US applications

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660