

# LMP-1204G-SFP Series

12-Port Industrial Gigabit PoE+ Managed Ethernet Switch, with 8\*10/100/1000Tx (30W/Port) and 4\*100/1000 SFP Slots, 48~55VDC Power Input



## Features


- ▶ Supports 8\*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port and 4\*100/1000Fx SFP Fiber Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ PoE Ping Alarm Function for PoE Ports Power Recycle
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp. – STD: -10°~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

## INTRODUCTION

**Antaira Technologies' LMP-1204G-SFP series** is a 12-port industrial PoE+ managed Ethernet switch that is embedded with 8\*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, and 4\*100/1000Fx SFP fiber ports that support either Single or Multi-Mode modules. The LMP-1204G-SFP series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/ HTTPS/ SSH/ SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-1204G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

## DIMENSIONS

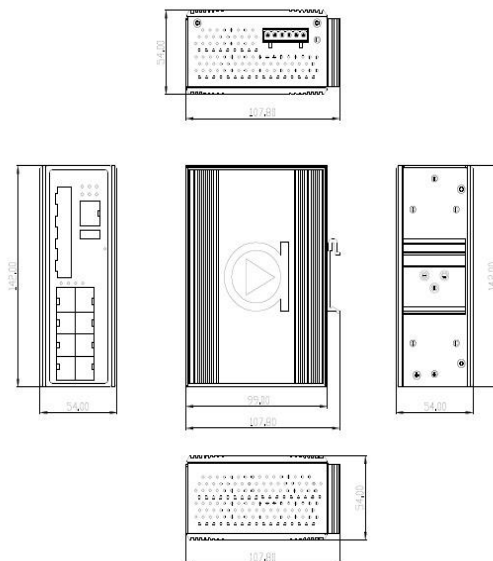

## SPECIFICATIONS

Technology		Protection	
	IEEE 802.3 10Tx Ethernet	<b>Overload Current</b>	Present
	IEEE 802.3u 100Tx Fast Ethernet	<b>Power Reverse Polarity</b>	Present (the unit will not be on, if power reverse)
	IEEE 802.3ab 1000Tx Gigabit Ethernet		
	IEEE 802.3z Gigabit Fiber	<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA- 568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
	IEEE 802.3x Flow Control for Full Duplex		
	IEEE 802.3ad for Port Trunk with LACP		
	IEEE 802.1d STP (Spanning Tree Protocol)		
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)		
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)		
	ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol		
	IEEE 802.1Q for VLAN Tagging		
	IEEE 802.1x for Network Authentication		
	IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization		
Standards		Mechanical Characteristics	
		<b>LED Indicator</b>	Per Unit: Power 1 & 2 (Green), Fault (Red) PoE: Feeding Power (Green)
		<b>Housing</b>	Metal IP30 rated
		<b>Dimensions</b>	54 x 142 x 99 mm
		<b>Weight</b>	Unit: 2.5 lbs Shipping: 3.0 lbs
		<b>Mounting</b>	DIN-Rail; Wall-mount (Optional)
Switch Properties		Power Requirement	
<b>Switch Architecture</b>	Back-Plane (Switching Fabric): 24.0Gbps IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS	<b>Input Voltage</b>	48~55VDC Redundant Input
<b>Protocol</b>		<b>Power Connection</b>	1 removable 6-contact terminal block
<b>Data Process</b>	Store-and-Forward	<b>PoE Power Output</b>	Maximum 30W/port
<b>Transfer Rate</b>	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	<b>Power Consumption</b>	15 Watts (no PD included) 195 Watts (Fully loaded)
<b>Packet Buffer</b>	4 Mbits	Environmental Limits	
<b>MAC Table</b>	8K	<b>Operating Temperature</b>	STD: -10° to 70°C EOT: -40° to 75°C
<b>Jumbo Frame</b>	9.6K	<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	<b>Ambient Relative Humidity</b>	5 to 95%, (Non-condensing)
<b>VLAN Group</b>	0 ~ 4094	Regulatory Approvals	
<b>IGMP Group</b>	Up to 256 Groups	<b>EMI</b>	FCC Class A
Port Interface		<b>EMS</b>	EN6100-4-2,3,4,5,6,8 EN6100-6-2,4
<b>Ethernet Port</b>	8*10/100/1000Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	<b>Free Fall</b>	IEC60068-2-32
<b>Fiber Port</b>	4*100/1000 Dual Rate SFP Slots	<b>Shock</b>	IEC60068-2-27
<b>Wavelength</b>	Dependent on Fiber type and Distance	<b>Vibration</b>	IEC60068-2-6
<b>RS232 Serial Console</b>	1*RS232 in RJ45 connector with console cable, 115.2bps, 8,N,1	<b>Green</b>	RoHS Compliant
<b>Configuration Backup</b>	1*USB 2.0	<b>Certifications</b>	FCC, CE, UL 61010-1, 61010-2-201, Class 1 Division 2NEMA TS2, ATEX
		<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LMP-1204G-SFP</b>	12-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx + 4*100/1000 SFP Slots
<b>LMP-1204G-SFP-T</b>	12-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx + 4*100/1000 SFP Slots; EOT: -40° to 75°C

### Optional Accessories

<b>MDR-100-48</b>	100 Watt Industrial Slim Single Output DIN-Rail Power Supply – 48VDC / 2.0 Amps
<b>DR-120-48</b>	120 Watt Industrial Single Output DIN-Rail Power Supply – 48VDC / 2.5 Amps
<b>SDR-240-48</b>	240 Watt Industrial Slim High-Efficiency Single Output DIN-Rail Power Supply – 48VDC / 5.0 Amps
<b>SFP-M-T</b>	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
<b>SFP-S10-T</b>	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
<b>DIN-RACK-2U</b>	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660