




# SBC-330/ SBC-331

3.5" SBC Motherboard

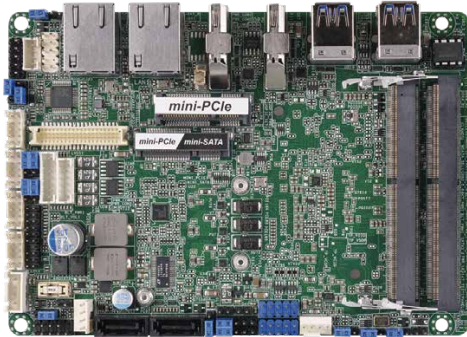

## KEY FEATURES

- Intel® 7<sup>th</sup>/ 6<sup>th</sup> Gen (Kabylake-S/Skylake-S) Core™ Processors
- 2 x 260-pin SO-DIMM up to 32GB DDR4 2133 MHz (16GB per DIMM)
- 4 x USB 3.1 Gen1, 4 x USB 2.0, 1 x mini-PCIe, 1 x mSATA/mini-PCIe, 4 x COM, 2 x SATA3
- 2 x Intel 1 Gigabit LAN
- Supports triple display, 2 x DP 1.2, 1 x LVDS
- TPM Header
- Support Intel® vPro, AMT, RAID 0/1 (SBC-330)
- Support Intel® RAID 0/1 (SBC-331)
- 12~36V DC-In

## SPECIFICATIONS

Form Factor	SBC-330	SBC-331
Dimensions	3.5" SBC (5.8-in x 4.0-in)	

### Processor System

CPU	Intel® 7 <sup>th</sup> / 6 <sup>th</sup> Gen (Kabylake-S/Skylake-S) Core™ Processors	
	- SBC-330P (i7-6600U, QC, 2.60GHz, 15W)	- SBC-331V (i3-6100U, QC, 2.30GHz, 15W)
	- SBC-330M (i5-6300U, QC, 2.40GHz, 15W)	
Chipset	MCP	
Socket	N/A	
BIOS	AMI SPI 128 Mbit	

### Memory

Technology	Dual Channel DDR4 2133 MHz
Capacity	32 GB (16 GB per DIMM)
Socket	2 x 260-pin SO-DIMM

### Graphics

Controller	Intel® Gen9 Graphics DX 12
HDMI	N/A
DisplayPort	DisplayPort 1.2 Max resolution up to 4096x2160@60Hz
VGA	N/A
LVDS	Dual channel 24 bit up to 1920x1200@60Hz
eDP	N/A
DVI	N/A
MultiDisplay	Triple Display

### Expansion Slot

PCIe	N/A
PCI	N/A
mini-PCIe	1 x Full size with PCIe x1 and USB 2.0
mSATA/mini-PCIe	1 x Full size with SATA3 and USB 2.0
M.2	N/A
SIM Socket	N/A

### Audio

Interface	Realtek ALC887, High Definition Audio. Line-out, Mic-in
-----------	---

### Ethernet

Controller/ Speed	SBC-330P/330M LAN1: 1 x Intel® I219LM with 10/100/1000 Mbps, supports AMT/vPro LAN2: 1 x Intel® I211AT with 10/100/1000 Mbps SBC-331V LAN1: 1 x Intel® I219V with 10/100/1000 Mbps LAN2: 1 x Intel® I211AT with 10/100/1000 Mbps
Connector	2 x RJ-45

### Rear I/O

HDMI	N/A
DisplayPort	2 x DP1.2
VGA	N/A
DVI	N/A
Ethernet	2 x 1 Gigabit LAN
USB	4 x USB 3.1 Gen1
Audio	N/A
COM	N/A
PS2	N/A

### Internal Connector

USB	4 x USB 2.0 (2 x 2.54 pitch header)
COM	1 x COM (RS-232/422/485), 3 x COM (RS-232)
Parallel	N/A
GPIO	4 x GPI + 4 x GPO
TPM	TPM Header
LVDS	1
eDP	N/A
VGA	N/A
SATA PWR Output	1
Speaker Header	N/A

### Storage

M.2	N/A
mSATA	1 x half size with SATA3 and USB2.0 colay with mini-PCIe
SATA	2 x SATA3 (6Gb/s)
RAID	Intel® SATA RAID 0/1
eMMC	N/A

### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ..., 255sec

### Power Requirements

Input PWR	12~36V (DC In)
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

### Environment

Operating Temp	0°C ~ 60°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660