

IMC-C100-XX Series

Compact 10/100TX to 100FX Industrial Media Converter with SC/ST Connector



Features


- ▶ 1*10/100TX Fast Ethernet
- ▶ 1*100FX SC/ST Connector (Multi / Single-Mode)
- ▶ RJ45 Port Support Auto MDI / MDI-X Function
- ▶ Auto Negotiation Speed, Half / Full Duplex
- ▶ Store-and-Forward Switching Architecture
- ▶ Built-in Link Fault Pass Through (LFP)
- ▶ Built-in Far End Fault (FEF)
- ▶ Wide-Range Redundant Power Design
- ▶ Redundant Power Input: 12~48VDC
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' **IMC-C100-XX Series** is a compact IP30 rated Ethernet-to-Fiber media converter featuring a 10/100TX Ethernet port and a fixed fiber interface supporting ST or SC connectors depending on the model. There are Multimode and Single-Mode models to support applications with a variety of fiber distances and types. It is designed to fulfill industrial applications that require fiber optic distance extension while using minimal space.

The IMC-C100-XX series has a built-in "Link Fault Pass Through" (LFP) and "Far End Fault" (FEF) function with 12~48VDC redundant power inputs with reverse polarity and overload current protection. This product series supports DIN-rail as well as wall mountable orientations and provides operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 80°C.

DIMENSIONS

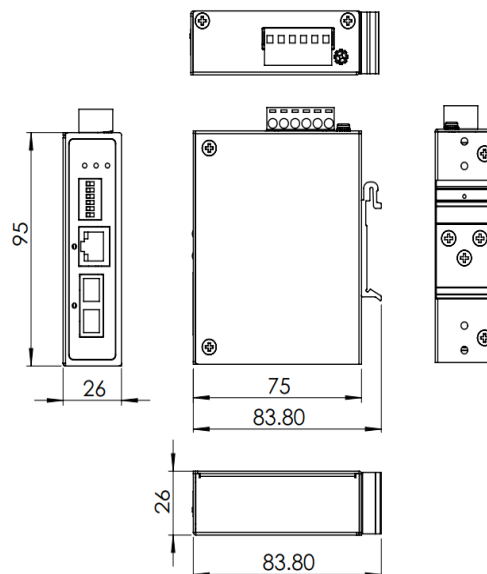

SPECIFICATIONS

Technology		Power Requirement	
Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet	Input Voltage	12 to 48VDC, Redundant Inputs
Processing Type	Store and Forward	Power Connection	1 removable 6-contact terminal block
Protocol	CSMA/CD	Reverse Polarity Protection	Present
Flow Control	IEEE 802.3x back pressure flow control	Overload Current Protection	Present
Switch Properties		Power Consumption	2 Watts for System
Memory Buffer	128kbits	Relay Contact	24VDC, 1A resistive
Interface		Environmental Limits	
Ethernet Port	1*RJ45 Port w/10/100TX, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 80°C
Fiber Port	1*100FX SC/ST type connector Multi-mode: 50/125um or 62.5/125um Single-mode: 9/125um or 10/125um	Storage Temperature	-40°C to 85°C
Fiber Wavelength	Depends on fixed fiber modules	Ambient Relative Humidity	5% to 95%, (non-condensing)
LED Indicators	Power 1, Power 2, Fault:: On / Off Fiber Port: Link / Act Ethernet Port: Link / Act	Regulatory Approvals	
Mechanical Characteristics		EMI	FCC Part 15 Subpart B Class A, CE EN 55032 Class A, EN 61000-6-4 Class A CE EN 55024 Class A, EN 61000-6-2 Class A, IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Housing	Metal, IP30 protection	EMS	IEC60068-2-32 IEC60068-2-27 IEC60068-2-6
Dimensions	26 x 95 x 75 mm (W x H x D)	Free Fall	IEC60068-2-32
Weight	Unit: 0.551 lb. Shipping: 0.815 lb.	Shock	IEC60068-2-27
Mounting	DIN-Rail Mounting, Wall Mounting	Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, UL 61010-2-201
		Warranty	5 Years

ORDERING INFO

IMC-C100-M	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, SC Connector
IMC-C100-M-T	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, SC Connector; EOT: -40°C to 80°C
IMC-C100-ST-M	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, ST Connector
IMC-C100-ST-M-T	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, ST Connector; EOT: -40°C to 80°C
IMC-C100-S3	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, SC Connector
IMC-C100-S3-T	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, SC Connector; EOT: -40°C to 80°C
IMC-C100-ST-S3	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, ST Connector
IMC-C100-ST-S3-T	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, ST Connector; EOT: -40°C to 80°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660