

## LNP-2804GN-SFP-T

28-Port 1U 19" Rackmount Industrial Gigabit PoE+ Managed Ethernet Switch, with 24\*10/100/1000Tx (PSE: 30W/Port) and 4\* Gigabit Combo Ports (4\*10/100/1000Tx RJ45, 4\*100/1000 SFP Slots); EOT: -40°C to 75°C




### Features

- ▶ Supports 24\*10/100/1000Tx IEEE 802.3 af/at PoE+ Gigabit Ports (PSE: 30W/Port) + 4\*Gigabit Copper/SFP Combo Ports (4\*10/100/1000Tx RJ45 + 4\*100/1000 SFP Slots)
- ▶ SFP Socket for Easy and Flexible Fiber Expansion
- ▶ Management: SNMP v1/v2c/v3, WEB, Telnet, Standard MIB
- ▶ NAT/Routing: Source NAT, Destination NAT, Static Routing
- ▶ Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), HTTPS, SSH and SNMPv3
- ▶ Redundancy: ERPS, Proprietary Ring (Ultra-High-Speed Recovery Time < 20 ms), RSTP/STP (802.1w/1D), MSTP
- ▶ 48VDC Power Input (46-57 VDC for PoE af, 53-57 VDC is Recommended for PoE at) & 2 Relay Outputs
- ▶ Extended Operating Temperature: -40°C ~75°C
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ 1U Rackmount Design
- ▶ IP30 Protection
- ▶ 5-Year Warranty

### INTRODUCTION

Antaira Technologies' LNP-2804GN-SFP-T is an industrial-class Layer 3 full managed switch with 24 Gigabit ports and four Gigabit combo ports. It is designed for rack-mount installation, and can be deployed in demanding outdoor environments. It is suitable for edge to core industrial networks. It integrates layer 3 switching software, which is optimized for scale and performance, delivering wire speed across all ports up to 56 Gbps for Layer 3 traffic forwarding and routing. In addition, the PoE design provides up to 30 watts per port to fulfill high power consumption devices. Moreover, it supports high reliability with -40°C ~ 75°C operating temperatures, and has a dual 48VDC input power design to ensure vital network capabilities with minimal downtime.

### DIMENSIONS

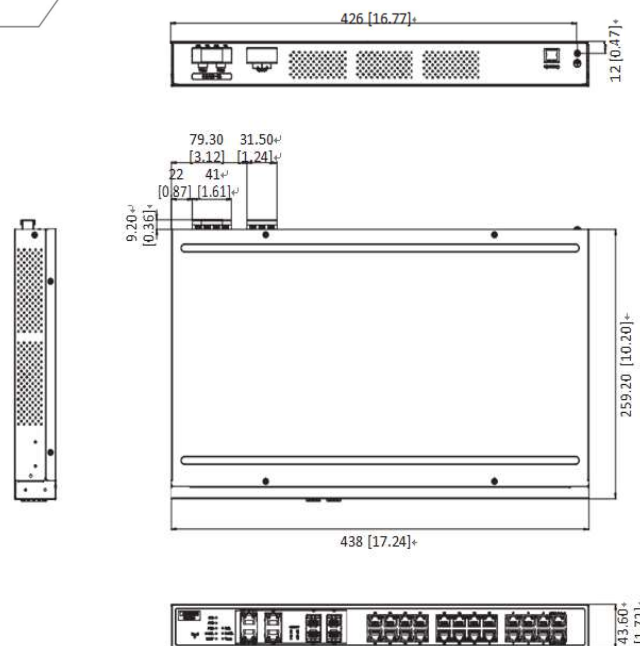

## SPECIFICATIONS

Technology		Power Requirements	
Standards	IEEE 802.3 10Base-T Ethernet	<b>Input Voltage</b>	46 to 57VDC, Redundant Inputs
	IEEE 802.3u 100Base-TX Fast Ethernet	<b>Power Connection</b>	4-Pin Terminal Block
	IEEE 802.3ab 1000Base-T Gigabit Ethernet	<b>Power Consumption</b>	20 Watts for System
	IEEE 802.3u 100Base-FX Fast Fiber	<b>Max. PoE Power Budget</b>	685 Watts
	IEEE 802.3z 1000Base-X Gigabit Fiber	<b>Mechanical Characteristics</b>	
IEEE 802.3af/at Power over Ethernet	<b>Housing</b>		Metal, IP30 Protection
Processing Type		<b>Dimensions</b>	
Store and Forward		438 x 43.6 x 259.2 mm (W x H x D)	
Protocol		<b>Weight</b>	
Web browser, Telnet, Serial Console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6, IEEE 802.1Q, GVRP, Port-based VLAN, G.8032 ERPS, Proprietary Ring, 802.1w/D RSTP/STP, IP Access Security, Port Security, DHCP Client, Port and IP Binding, 802.1X Port Access Control		Unit 8.37lbs.	
Flow Control		<b>Mounting</b>	
IGMP Snooping/Query for Multicast Group Management, Port Trunking, Static/802.3ad, LACP Rate Limit and Storm Control, IEEE 802.1p QoS CoS/TOS/ DSCP Priority Queuing, IEEE 802.3x Flow Control		1U 19" Rackmount	
Switch Properties			
<b>Memory Buffer</b>	4.1Mbits	<b>Environmental Limits</b>	
<b>Jumbo Frame</b>	9,216bytes	<b>Operating Temperature</b>	EOT: -40°C to 75°C
<b>MAC Table Size</b>	8k	<b>Storage Temperature</b>	-40°C to 85°C
Interface			
<b>Ethernet Port</b>	24*RJ45 Port w/10/100/1000TX with PoE+, Auto Negotiation Speed, Full/Half Duplex Mode, and Auto MDI/MDI-X Connection	<b>Ambient Relative Humidity</b>	10% to 95%, (Non-condensing)
<b>RJ45/Fiber Combo Port</b>	4*100/1000 SFP Slots	<b>Regulatory Approvals</b>	
<b>Fiber Wavelength</b>	Depends on SFP Modules	<b>EMI</b>	CE FCC EN55022 Class A
<b>LED Indicators</b>	10/100T (X): Link/Activity, Duplex/Collision Gigabit Copper: Link/Activity, Speed (1000 Mbps) SFP: Link/Activity	<b>EMS</b>	IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
<b>Console</b>	RS-232 (RJ45)	<b>Free Fall</b>	IEC60068-2-32
		<b>Shock</b>	IEC60068-2-27
		<b>Vibration</b>	IEC60068-2-6
		<b>Green</b>	RoHS Compliant
		<b>Certifications</b>	FCC, CE
		<b>Safety</b>	UL 61010-1, UL 61010-2-201
		<b>Compliance</b>	EN50121-4
		<b>Warranty</b>	5 Years

## ORDERING INFO

**LNP-2804GN-SFP-T** 28-Port 1U 19" Rackmount Industrial Gigabit PoE+ Managed Ethernet Switch, with 24\*10/100/1000Tx (PSE: 30W/Port) and 4\* Gigabit Combo Ports (4\*10/100/1000Tx RJ45, 4\*100/1000 SFP Slots); EOT: -40°C to 75°C

Optional Accessories	
<b>SFP-100M-T</b>	100 Mbps Fiber SFP Transceiver, Multi-Mode 2km / LC/ 1310nm, -40°C to 85°C
<b>SFP-M-T</b>	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550m / LC/ 850nm, -40°C to 85°C
<b>SFP-100S20-T</b>	100 Mbps Fiber SFP Transceiver, Single-Mode 20km / LC/ 1310nm, -40°C to 85°C
<b>SFP-S10-T</b>	1 Gigabit Fiber SFP Transceiver, Single-Mode 10km / LC/ 1310nm, -40°C to 85°C

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660