



## SFP-10G-M 10G Ethernet SFP+ Transceiver

SFP+, LC Connector, 850nm VCSEL with PIN Receiver, Multi Mode, 300M



### Applications

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes
- 10GE Storage, 8G Fiber Channel
- Inter Rack Connection

### Features

- 10Gb/s serial optical interface compliant to 802.3ae 10GBASE-SR
- Electrical interface compliant to SFF-8431 specifications for enhanced 8.5 and 10 Gigabit small form factor pluggable module "SFP+"
- 850nm VCSEL transmitter, PIN photo-detector
- 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- Operating case temperature: 0 to 70°C
- All-metal housing for superior EMI performance
- Low power consumption
- Advanced firmware allow customer system encryption information to be stored in transceiver
- Cost effective SFP+ solution, enables higher port densities and greater bandwidth

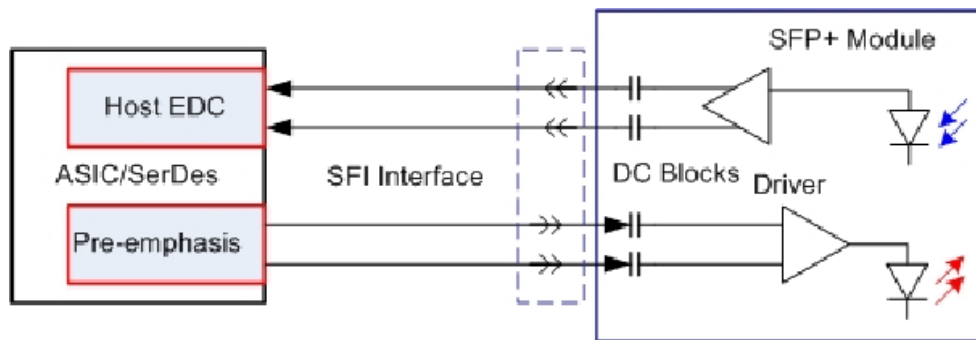


Figure1: Application in System



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 1. GENERAL DESCRIPTION

This 850 nm VCSEL 10Gigabit SFP+ transceiver is designed to transmit and receive optical data over 50/125  $\mu\text{m}$  or 62.5/125  $\mu\text{m}$  multimode optical fiber (Table 1).

| Fiber type                    | Minimum modal bandwidth @ 850 nm ( MHz·km ) | Operating range ( meters ) |
|-------------------------------|---------------------------------------------|----------------------------|
| Operating range<br>( meters ) | 160                                         | 2 to 26                    |
|                               | 200                                         | 2 to 33                    |
| 50 $\mu\text{m}$ MMF          | 400                                         | 2 to 66                    |
|                               | 500                                         | 2 to 82                    |
|                               | 2000                                        | 2 to 300                   |

**Table 1: SFP+ SR Operating Range for each Optical Fiber Type**

The SFP+ SR module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI. SFI typically operates over 200 mm of improved FR4 material or up to about 150mm of standard FR4 with one connector.


The transmitter converts 10Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 10GBASE-SR standard. An open collector compatible Transmit Disable (Tx\_Dis) is provided. A logic "1," or no connection on this pin will disable the laser from transmitting. A logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (TFault) is provided. TX\_Fault is a module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX\_Fault output contact is an open drain/collector and shall be pulled up to the Vcc\_Host in the host with a resistor in the range 4.7-10 k $\Omega$ . TX\_Disable is a module input contact. When TX\_Disable is asserted high or left open, the SFP+ module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 k $\Omega$  to 10 k $\Omega$  resistor



## SFP-10G-M 10G Ethernet SFP+ Transceiver

The receiver converts 10Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx\_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx\_LOS contact is an open drain/collector output and shall be pulled up to Vcc\_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx\_LOS signal is intended as a preliminary indication to the system in which the SFP+ is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.



### 2. TRANSCEIVER BLOCK DIAGRAM

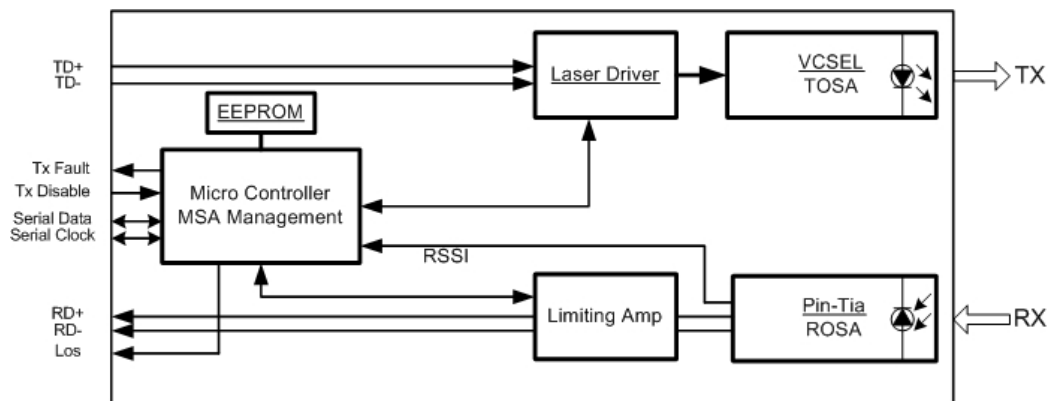



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 3. PROPOSED APPLICATION SCHEMATICS

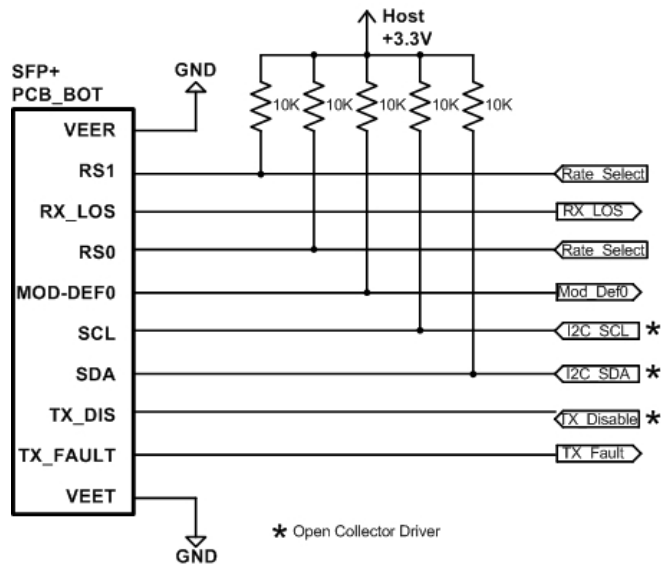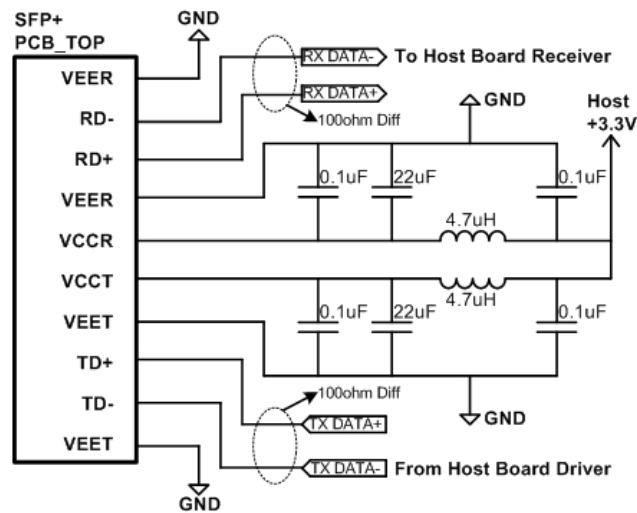



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 4. PIN DEFINITION

The SFP+ modules are hot-pluggable. Hot pluggable refers to plugging in or unplugging a module while the host board is powered. The SFP+ host connector is a 0.8 mm pitch 20 position right angle improved connector specified by SFF-8083, or stacked connector with equivalent with equivalent electrical performance. Host PCB contact assignment is shown in Figure 2 and contact definitions are given in Table 2. SFP+ module contacts mates with the host in the order of ground, power, followed by signal as illustrated by Figure 3 and the contact sequence order listed in Table 2.

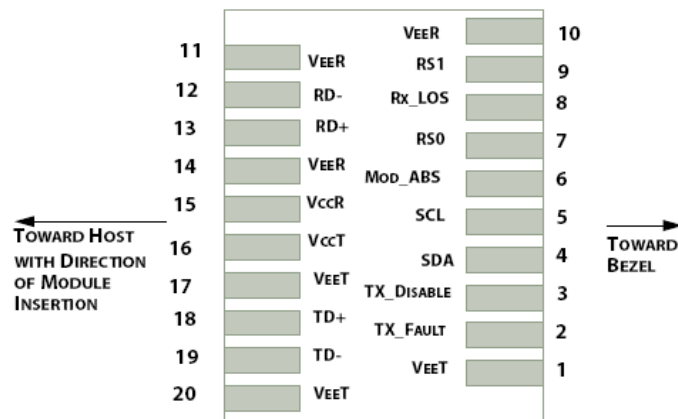


Figure 2: Module Interface to Host

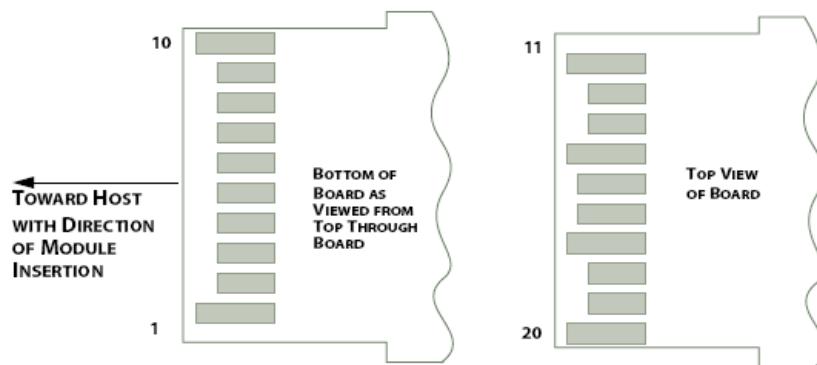


Figure 3: Module Contact Assignment



## SFP-10G-M 10G Ethernet SFP+ Transceiver

| PIN | Logic     | Symbol   | Name / Description                                      | Note |
|-----|-----------|----------|---------------------------------------------------------|------|
| 1   |           | VeeT     | Module Transmitter Ground                               | 1    |
| 2   | LVTTL-O   | TX_Fault | Module Transmitter Fault                                |      |
| 3   | LVTTL-I   | TX_Dis   | Transmitter Disable; Turns off transmitter laser output |      |
| 4   | LVTTL-I/O | SDA      | 2-Wire Serial Interface Data Line                       | 2    |
| 5   | LVTTL-I   | SCL      | 2-Wire Serial Interface Clock                           | 2    |
| 6   |           | MOD_DEF0 | Module Definition, Grounded in the module               |      |
| 7   | LVTTL-I   | RS0      | Receiver Rate Select                                    |      |
| 8   | LVTTL-O   | RX_LOS   | Receiver Loss of Signal Indication Active LOW           |      |
| 9   | LVTTL-I   | RS1      | Transmitter Rate Select (not used)                      |      |
| 10  |           | VeeR     | Module Receiver Ground                                  | 1    |
| 11  |           | VeeR     | Module Receiver Ground                                  | 1    |
| 12  | CML-O     | RD-      | Receiver Inverted Data Output                           |      |
| 13  | CML-O     | RD+      | Receiver Data Output (not used)                         |      |
| 14  |           | VeeR     | Module Receiver Ground                                  | 1    |
| 15  |           | VccR     | Module Receiver 3.3 V Supply                            |      |
| 16  |           | VccT     | Module Receiver 3.3 V Supply                            |      |
| 17  |           | VeeT     | Module Transmitter Ground                               | 1    |
| 18  | CML-I     | TD+      | Receiver Non-Inverted Data Output                       |      |
| 19  | CML-I     | TD-      | Transmitter Inverted Data Input                         |      |
| 20  |           | VeeT     | Module Transmitter Ground                               | 1    |

**Note:**

1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

**Table 2: SFP+ Module PIN Definition**



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 5. ABSOLUTE MAXIMUM RATING

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

| Parameters                 | Symbol           | Min. | Max. | Unit |
|----------------------------|------------------|------|------|------|
| Power Supply Voltage       | V <sub>CC</sub>  | 0    | 3.6  | V    |
| Storage Temperature        | T <sub>c</sub>   | -40  | 85   | °C   |
| Operating Case Temperature | T <sub>c</sub>   | 0    | 70   | °C   |
| Relative Humidity          | RH               | 5    | 95   | %    |
| RX Input Average Power     | P <sub>max</sub> | -    | 0    | dBm  |

**Table 3: Absolute Maximum Rating**

### 6. RECOMMENDED OPERATING ENVIRONMENT

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

| Parameters                 | Symbol          | Min.  | Typical | Max   | Unit |
|----------------------------|-----------------|-------|---------|-------|------|
| Power Supply Voltage       | V <sub>CC</sub> | 3.135 | 3.3     | 3.465 | V    |
| Operating Case Temperature | T <sub>c</sub>  | 0     | 25      | 70    | °C   |

**Table 4: Recommended Operating Environment**



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 7. OPTICAL CHARACTERISTICS

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                      | Symbol      | Min. | Typical | Max    | Unit  | Notes           |
|--------------------------------|-------------|------|---------|--------|-------|-----------------|
| <b>Transmitter</b>             |             |      |         |        |       |                 |
| Center Wavelength              | $\lambda_t$ | 840  | 850     | 860    | nm    |                 |
| RMS spectral width             | Pm          | -    | -       | Note 1 | nm    |                 |
| Average Optical Power          | Pavg        | -6.5 | -       | -1     | dBm   |                 |
| Optical Power OMA              | Poma        | -    | -       | Note 1 | dBm   |                 |
| Laser Off Power                | Poff        | -    | -       | -30    | dBm   |                 |
| Extinction Ratio               | ER          | 3.5  | -       | -      | dB    |                 |
| Transmitter Dispersion Penalty | TDP         | -    | -       | 3.9    | dB    |                 |
| Relative Intensity Noise       | Rin         | -    | -       | -128   | dB/Hz | 12dB reflection |
| Optical Return Loss Tolerance  |             | -    | -       | 12     | dB    |                 |
| <b>Receiver</b>                |             |      |         |        |       |                 |
| Center Wavelength              | $\lambda_r$ | 840  | 850     | 860    | nm    |                 |
| Receiver Sensitivity (OMA)     | Psens       | -    | -       | -11.1  | dBm   |                 |
| Stressed Sensitivity (OMA)     |             | -    | -       | -7.5   | dBm   |                 |
| Los Assert                     | LosA        | -30  | -       | -      | dBm   |                 |
| Los Dessert                    | LosD        | -    | -       | -12    | dBm   |                 |
| Los Hysteresis                 | LosH        | 0.5  | -       | -      | dB    |                 |
| Overload                       | Pin         | -    | -       | -1     | dBm   |                 |
| Receiver Reflectance           |             | -    | -       | -12    | dB    |                 |

**Table 5: Optical Characteristics**



## SFP-10G-M 10G Ethernet SFP+ Transceiver

| Center Wavelength<br>(nm) | RMS Spectral width (nm) |                |                |                |                |                |                |                |                |
|---------------------------|-------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|                           | Up to<br>0.05           | 0.05 to<br>0.1 | 0.1 to<br>0.15 | 0.15 to<br>0.2 | 0.2 to<br>0.25 | 0.25 to<br>0.3 | 0.3 to<br>0.35 | 0.35 to<br>0.4 | 0.4 to<br>0.45 |
| 840 to 842                | -4.2                    | -4.2           | -4.1           | -4.1           | -3.9           | -3.8           | -3.5           | -3.2           | -2.8           |
| 842 to 844                | -4.2                    | -4.2           | -4.2           | -4.1           | -3.9           | -3.8           | -3.6           | -3.3           | -2.9           |
| 844 to 846                | -4.2                    | -4.2           | -4.2           | -4.1           | -4             | -3.8           | -3.6           | -3.3           | -2.9           |
| 846 to 848                | -4.3                    | -4.2           | -4.2           | -4.1           | -4             | -3.8           | -3.6           | -3.3           | -2.9           |
| 848 to 850                | -4.3                    | -4.2           | -4.2           | -4.1           | -4             | -3.8           | -3.6           | -3.3           | -3             |
| 850 to 852                | -4.3                    | -4.2           | -4.2           | -4.1           | -4             | -3.8           | -3.6           | -3.4           | -3             |
| 852 to 854                | -4.3                    | -4.2           | -4.2           | -4.1           | -4             | -3.9           | -3.7           | -3.4           | -3.1           |
| 854 to 856                | -4.3                    | -4.3           | -4.2           | -4.1           | -4             | -3.9           | -3.7           | -3.4           | -3.1           |
| 856 to 858                | -4.3                    | -4.3           | -4.2           | -4.1           | -4             | -3.9           | -3.7           | -3.5           | -3.1           |
| 858 to 860                | -4.3                    | -4.3           | -4.2           | -4.2           | -4.1           | -3.9           | -3.7           | -3.5           | -3.2           |

\* Note 1: Trade-offs are available between spectral width, center wavelength and minimum OMA, as shown in table 6.

**Table 6: Minimum 10GBASE-SR OMA as a Function of Wavelength and Spectral Width**

## 8. DIGITAL DIAGNOSTIC FUNCTIONS

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales stuff.

| Parameter                             | Symbol    | Min.  | Max  | Unit | Notes                 |
|---------------------------------------|-----------|-------|------|------|-----------------------|
| Temperature monitor absolute error    | DMI_Temp  | -3    | 3    | degC | Over operating temp   |
| Laser power monitor absolute error    | DMI_TX    | -3    | 3    | dB   |                       |
| RX power monitor absolute error       | DMI_RX    | -3    | 3    | dB   | -1dBm to -12dBm range |
| Supply voltage monitor absolute error | DMI_VCC   | -0.08 | 0.08 | V    | Full operating range  |
| Bias current monitor                  | DMI_Ibias | -10%  | 10%  | mA   |                       |

**Table 7: Digital diagnostic specification table**



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 9. ELECTRICAL CHARACTERISTICS

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                             | Symbol | Min. | Typical | Max  | Unit | Notes      |
|---------------------------------------|--------|------|---------|------|------|------------|
| Data Rate                             |        | -    | 10.3125 | -    | Gbps |            |
| Power Consumption                     |        | -    | 600     | 800  | mW   |            |
| <b>Transmitter</b>                    |        |      |         |      |      |            |
| Single Ended Output Voltage Tolerance |        | -0.3 | -       | 4    | V    |            |
| C common mode voltage tolerance       |        | 15   | -       | -    | mV   |            |
| Tx Input Diff Voltage                 | VI     | 90   |         | 350  | mV   |            |
| Tx Fault                              | VoL    | -0.3 |         | 0.4  | V    | At 0.7mA   |
| Data Dependent Input Jitter           | DDJ    |      |         | 0.1  | UI   |            |
| Data Input Total Jitter               | TJ     |      |         | 0.28 | UI   |            |
| <b>Receiver</b>                       |        |      |         |      |      |            |
| Single Ended Output Voltage Tolerance |        | -0.3 | -       | 4    | V    |            |
| Rx Output Diff Voltage                | Vo     | 150  |         | 425  | mV   |            |
| Rx Output Rise and Fall Time          | Tr/Tf  | 30   |         |      | ps   | 20% to 80% |
| Total Jitter                          | TJ     |      |         | 0.7  | UI   |            |
| Deterministic Jitter                  | DJ     |      |         | 0.42 | UI   |            |

**Table 8: Electrical Characteristics**



## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 10. CONTROL AND STATUS I/O TIMING CHARACTERISTICS

Timing characteristics of control and status I/O are included in Table 8, which is also defined in SFF-8431.

| Parameter                                       | Symbol         | Min | Max | Unit | Condition                                                                                                                        |
|-------------------------------------------------|----------------|-----|-----|------|----------------------------------------------------------------------------------------------------------------------------------|
| TX Disable Assert Time                          | t_off          |     | 10  | μs   | Time from rising edge of TX Disable to when the optical output falls below 10% of nominal                                        |
| TX Disable Negate Time                          | t_on           |     | 1   | ms   | Time from falling edge of TX Disable to when the modulated optical output rises above 90% of nominal                             |
| Time to initialize, including reset of TX_Fault | t_init         |     | 300 | ms   | From power on or negation of TX Fault using TX Disable                                                                           |
| TX Fault Assert Time                            | t_fault        |     | 100 | μs   | Time from fault to TX fault on.                                                                                                  |
| TX Disable to reset                             | t_reset        | 10  |     | μs   | Time TX Disable must be held high to reset TX_fault                                                                              |
| LOS Assert Time                                 | t_loss_on      |     | 100 | μs   | Time from LOS state to RX LOS assert                                                                                             |
| LOS Deassert Time                               | t_loss_off     |     | 100 | μs   | Time from non-LOS state to RX LOS deassert                                                                                       |
| Rate-Select Change Time                         | t_ratesel      |     | 10  | μs   | Time from rising or falling edge of Rate Select input until receiver bandwidth is in conformance with appropriate specification. |
| Serial ID Clock Rate                            | f_serial_clock |     | 100 | kHz  |                                                                                                                                  |


Table 9: Timing Characteristics

**antaira™**

## SFP-10G-M 10G Ethernet SFP+ Transceiver

### 11. MECHANICAL

Complies with SFF-8432 rev. 5.0, improved Pluggable form factor specification.

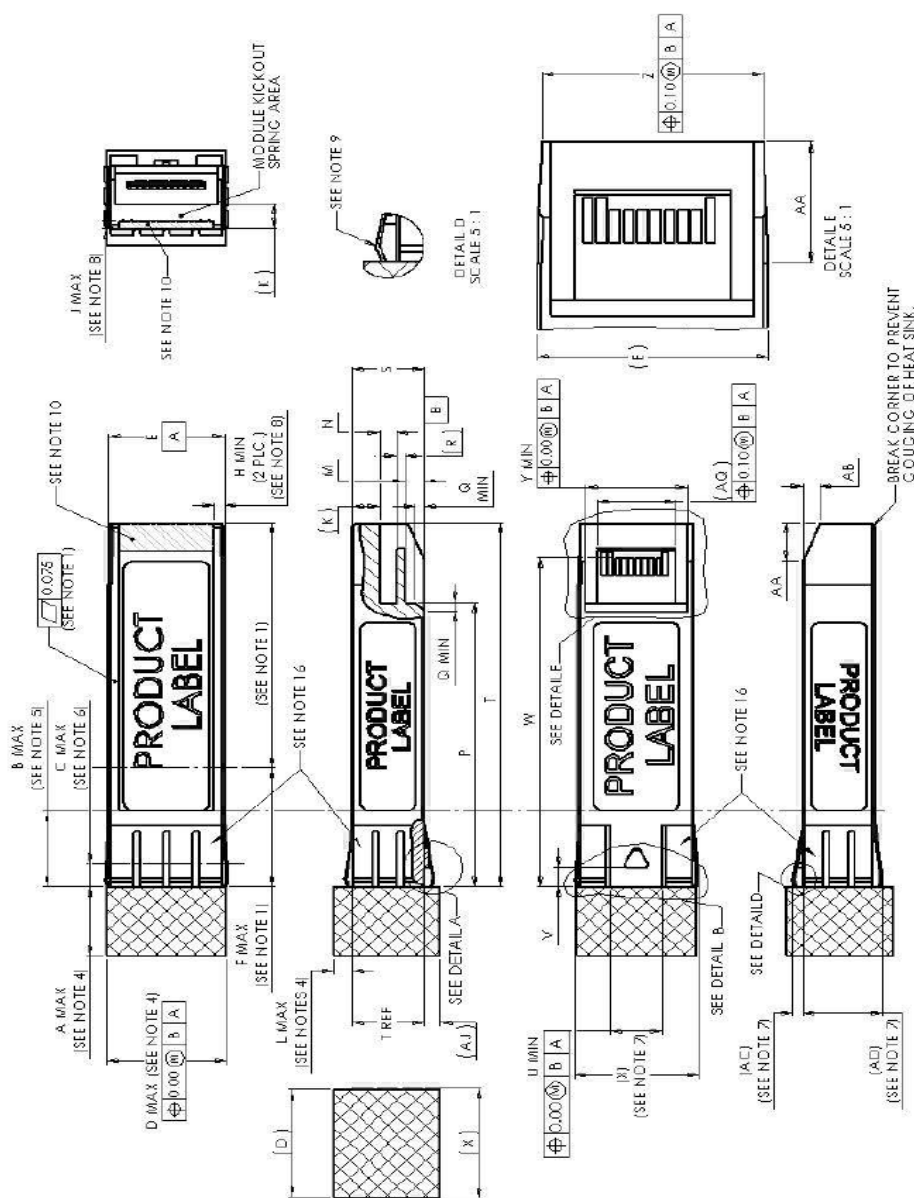



## SFP-10G-M 10G Ethernet SFP+ Transceiver

| Designator | Dimension (mm) | Tolerance (mm)      | Comments                                                                                     |
|------------|----------------|---------------------|----------------------------------------------------------------------------------------------|
| A          | 10.00          | Recommended Maximum | Module length extending outside of cage, see Note 4. Other lengths are application specific. |
| B          | 10.00          | Maximum             | Designated EMI ground spring area, see Note 5                                                |
| C          | 3.00           | Maximum             | EMI spring/Cage Contact Point, see Note 6                                                    |
| D          | 14.00          | Maximum             | Module width extending outside of cage, see Note 4                                           |
| E          | 13.55          | ±0.25               | Module width                                                                                 |
| F          | 15.50          | Maximum             | Distance to front end of optional heat sink area, see Note 1                                 |
| H          | 1.25           | Minimum             | Top slot distance from edge, see note 8                                                      |
| J          | 1.00           | Maximum             | Top slot depth, see note 8                                                                   |
| K          | 3.25           | Reference           | Height of module kick-out spring area                                                        |
| L          | 2.10           | Maximum             | Module top height extending outside of cage see Note 4                                       |
| M          | 2.25           | ±0.10               | Distance from bottom of Module to printed circuit board                                      |
| N          | 2.00           | ±0.25               | Distance from rear shoulder to printed circuit board                                         |
| P          | 37.10          | ±0.30               | Distance from positive stop to bottom opening of Module and beginning of bottom rear relief  |

**Table 10: Key Mechanical Dimensions**



## SFP-10G-M 10G Ethernet SFP+ Transceiver


### 12. ESD

This transceiver is specified as ESD threshold 2kV for all electrical input pins, tested per MIL-STD-883, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and handled only in an ESD protected environment.

### 13. LASER SAFETY

This is a Class 1 Laser Product according to IEC 60825-1:1993+A1:1997+A2:2001. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (July 26, 2001)

Caution: use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

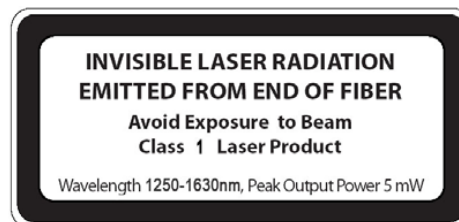

classified in accordance with IEC 60825-1:2001-08

\*IEC is a registered trademark of the International Electrotechnical Commission

\*\*ANSI is a registered trademark of the American National Standards Institute

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660