

Rugged Embedded



Nuvo-9531-FT Series

Intel® 13th/12th-Gen Core™ i9/ i7/ i5/ i3 Compact Fanless Computer with 4x 2.5GbE, 4x USB3.2 and 1x Hot-swappable HDD Tray and Flattop Heatsink



Key Features

- 212 x 165 x 45 mm low-profile design with flattop heatsink
- Intel® 13th/12th-Gen Core™ 65W/ 35W LGA1700 CPU
- Rugged, -25°C to 60°C fanless operation
- 4x 2.5GbE with optional PoE+ and 4x USB3.2 Gen 1 with screw-lock
- 1x M.2 2280 Gen4 x4 NVMe and 1x hot-swappable HDD tray for storage
- 4-CH isolated DI and 4-CH isolated DO
- VGA + DP dual display output
- Optional ignition power control



Contact Neosys

Get Quote

Introduction

Nuvo-9531-FT is a new category of fanless computer utilizing flattop heatsink for passive heat dissipation. It is designed to be installed inside a metal cabinet, waterproof box or explosion-proof case, where ventilation is limited. With the flattop heatsink and the non-adhesive thermal pad on top, heat generated by Nuvo-9531-FT can be effectively conducted to the outer surface of the cabinet to maintain optimum operating temperature.

Nuvo-9531-FT supports Intel® 13th Gen processors with up to 24 cores/ 32 threads to deliver almost double the performance when compared to previous Intel® 10th or 11th Gen platforms. It has rich I/O functions such as four 2.5GbE with optional PoE+ PSE and four USB3.2 Gen1 ports for multiple camera connectivity for machine vision and surveillance applications. In addition, it features a Gen4 x4 M.2 to support an NVMe SSD with read/ write speeds up to 7000 MB/s; a hot-swappable HDD tray to hot-swap the storage drive without turning off the system or dismantling the chassis; two mini PCIe and one M.2 E key slots to install WiFi or 5G/ 4G wireless communication modules. The system is also equipped with 8x DIO, 2x COM ports, and dual display outputs for your industrial embedded application needs.

Combining excellent computing performance, abundant I/O connections, compactness, and a unique flattop heatsink, Nuvo-9531-FT is perfect for applications deployed in a sealed cabinet or confined space, where traditional fanless computers fall short.

Specifications

System Core		Internal Expansion Bus	
Processor	Supporting Intel® 13 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Supporting Intel® 12 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	
	- Intel® Core™ i9-13900E/ i9-13900TE	- Intel® Core™ i9-12900E/ i9-12900TE	
	- Intel® Core™ i7-13700E/ i7-13700TE	- Intel® Core™ i7-12700E/ i7-12700TE	
	- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE	- Intel® Core™ i5-12500E/ i5-12500TE	
	- Intel® Core™ i3-13100E/ i3-13100TE	- Intel® Pentium® G7400E/ G7400TE	
	- Intel® Celeron® G6900E/ G6900TE		
Chipset	Intel® H610E platform controller hub		
Graphics	Integrated Intel® UHD Graphics 770 (32EU) / 730 (24EU)		
Memory	Up to 32GB non-ECC DDR4 3200 SDRAM (one SODIMM slot)		
TPM	Supports dTPM 2.0		
I/O Interface		Power Supply	
Ethernet	4x 2.5GBASE-T Ethernet ports by Intel® I226-IT GbE controllers		
PoE+	Optional IEEE 802.3at PoE+ PSE for 4x 2.5GbE ports 100 W total power budget		
USB 3.2	4x USB 3.2 Gen1 (5 Gbps) ports		
USB 2.0	2x USB 2.0 ports		
Video Port (Integrated Graphics)	1x VGA output, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution		
Serial Port	1x software-programmable RS-232/422/485 ports (COM1) 3x 3-wire RS-232 ports (COM2/3/4) or 1x RS-422/485 port (COM2)		
Audio	1x 3.5 mm jack for mic-in and speaker-out		
Isolated DIO	4-CH isolated DI and 4-CH isolated DO		
		Mini PCI Express	
		2x full-size mini PCI Express sockets with internal SIM sockets	
		M.2 E key	
		1x M.2 2230 E key socket for WiFi5, WiFi6 or Google Edge TPU module	
		Storage Interface	
		SATA HDD	
		1x hot-swappable 2.5" HDD/ SSD tray for 7mm HDD/ SSD	
		M.2	
		1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD	
		DC Input	
		1x 3-pin pluggable terminal block for 8-48V DC input with optional ignition power control	
Mechanical		Dimension	
		212mm (W) x 165 mm (D) x 45 mm (H)	
		Weight	
		2.4 kg	
		Mounting	
		Wall-mount (optional)	
Environmental		Operating Temperature	
		with 35W CPU -25°C ~ 60°C ^{[1][2]}	
		with 65W CPU -25°C ~ 60°C ^{[1][2]} (configured as 35W TDP)	
		Storage Temperature	
		-40°C ~ 85°C	
		Humidity	
		10%~90% , non-condensing	
		Vibration	
		MIL-STD-810H, Method 514.8, Category 4	
		Shock	
		MIL-STD-810H, Method 516.8, Procedure I	
		EMC	
		CE/FCC Class A, according to EN 55032 & EN 55035	

^[1] For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.
^[2] The system was tested while mounted on an aluminum panel measuring 60(W) x 60(D) x 0.3(H) cm in a high temperature environment to simulate in-cabinet conditions. For more information, please refer to the user manual.




Nuvo-9531-FT Series

Appearance



Dimensions

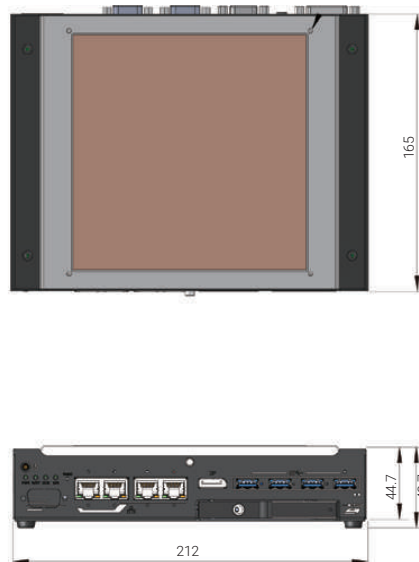

Ordering Information

Model No.	Product Description
Nuvo-9531-FT	Intel® 13 th /12 th -Gen Core™ i9/ i7/ i5/ i3 compact fanless computer with 4x 2.5GbE , 4x USB3.2 Gen 1, a hot-swappable HDD tray and flattop heatsink
	<i>Optional ignition power control and 802.3at PoE+ PSE for 4x 2.5GbE ports</i>

Optional Accessories

PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30°C to 70°C.
PA-280W-ET2	280W AC/DC power adapter 24V/ 11.67A; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C. (recommended for 65W CPU)
Wmkit-Nuvo-9531-FT	Wall mounting assembly for Nuvo-9531-FT

All specifications and photos are subject to change without prior notice

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660