

PICO-WHU4-SEMI

PICO-SEMI Embedded with 8th Generation Intel® Core™ i7/i5/i3/Celeron® U-Series Processor SoC

PICO-SEMI



Features

- 8th Intel® Core™ i7/i5/i3/Celeron Processor SoC
- Non-ECC DDR4 SODIMM Slot x 1, up to 32GB
- Dual HDMI ports (HDMI 1.4b), GbE x 2
- SATA 6.0 Gb/s x 1, support 2.5" SSD
- Full size mSATA/mPCIe x 1 (Select by BIOS), M.2 2230 (E key) x 1
- USB 3.2 Gen 2 x 2, USB 2.0 x 2
- RS-232/422/485 x 2 (Optional)
- Lockable DC 12V



SERIAL PORT	COM1, COM2 (RS232/422/485, supports 5V/12V/RI)(Optional)
VIDEO	—
SATA	SATA III x 1 +5V SATA Power Connector x 1
AUDIO	—
DIO/GPIO	4-bit
SMBus/I2C	SMBus/I2C x1 (SMBUS as default)
Touch	—
FAN	4pins Smart Fan x1
SIM	—
Front Panel	HDD LED, PWR LED, Power Button, Buzzer, Reset
Others	—
EXPANSION	
Mini PCI-E/mSATA	Full size mSATA/mPCIe or USB2.0 x 1 (PCIe as default, mSATA selected by BIOS)
M.2	M.2 E-Key 2230 x 1 (for WIFI/BT, PCIe/USB signal only)
Others	SMBus/I2C/LPC/eSPI x 1
ENVIRONMENT & CERTIFICATION	
OPERATING TEMP	32°F ~ 122°F (0°C ~ 50°C) with airflow 0.5m/s for SSD SKU
STORAGE TEMP	-40°F ~ 185°F (-40°C ~ 85°C)
OPERATING HUMIDITY	0% ~ 90% relative humidity, non-condensing
MTBF (HOURS)	298,762
EMC	CE/FCC Class A

Specifications

SYSTEM	
FORM FACTOR	PICO-SEMI
CPU	Intel® 8th Generation Core™ i7/i5/i3/Celeron SoC i7-8665UE (4C/8T, 1.7GHz, up to 4.4GHz, TDP 15W) i5-8365UE (4C/8T, 1.6GHz, up to 4.1GHz, TDP 15W) i3-8145UE (2C/4T, 2.2GHz, up to 3.9GHz, TDP 15W) Celeron® 4305UE (2C/2T, 2GHz, TDP 15W)
CHIPSET	Intel® 8th Generation Core™ i7/i5/i3/Celeron SoC
MEMORY TYPE	DDR4 up to 2400MHz SODIMM x 1, up to 32GB, Non-ECC
BIOS	UEFI
WAKE ON LAN	Yes
WATCHDOG TIMER	255 Levels
SECURITY	TPM2.0 (Optional)
RTC Battery	Lithium Battery 3V/240mAh
DIMENSION	5.90" x 3.94" x 2.36" (150mm x 100mm x 60mm)
Gross Weight	1.41 lbs. (0.64 kg)
OS Support	Windows 10 (64 bit) Ubuntu 18.04.3/Kernel 5.0
POWER	
POWER REQUIREMENT	+12V only
POWER SUPPLY TYPE	ATX
CONNECTOR	DC Jack Connector
POWER CONSUMPTION	Intel® i7-8665UE @ DDR4 16GB, 2.23A@ +12V(TYPICAL)
DISPLAY	
CONTROLLER	Intel® UHD Graphics 610/620
LVDS/eDP	—
Display Interface	HDMI 1.4b x 2 (up to 3840 x 2160)
Multiple Display	Up to 2 Simultaneous Displays
AUDIO	
CODEC	—
AUDIO INTERFACE	—
Speaker	—
EXTERNAL I/O	
ETHERNET	Realtek 8111 Gigabit Ethernet 10/100/1000Base, RJ-45 x2
USB	USB 3.2 Gen 2 x 2 USB 2.0 x 2
SERIAL PORT	—
VIDEO	HDMI 1.4b x 2 (up to 3840 x 2160)
INTERNAL I/O	
USB	—

Packing List

- PICO-WHU4-SEMI

Optional Accessories


Part Number	Description	Qty.
1701200102	(TF)SERIAL Cable.WL1010H-2*10P 1.0mm Housing.Dual DB9(M).10cm	1
1255300960	Power Adapter 12V/8A 96W FSP096-AHAN3	1
1702031802	Power Cord (US Type)	1
1702031803	Power Cord (Europe Type)	1
170203180E	Power Cord (Japan)	1
PICO-WHU4-SEMI-VESA1	PICO-WHU4-SEMI VESA bracket kit	1
PICO-WHU4-SEMI-WMT1	PICO-WHU4-SEMI Wallmount bracket kit	1

PICO-WHU4-SEMI

03


PICO-SEMI

Block Diagram

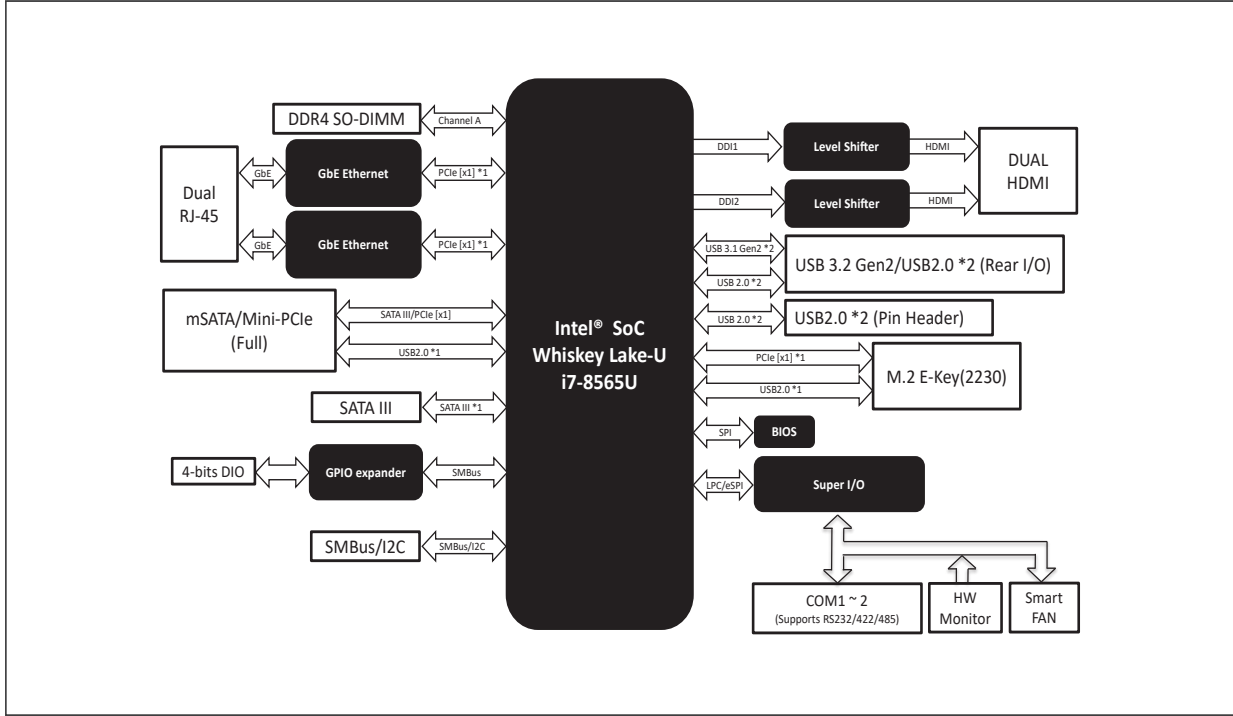

Dimension

Unit: mm

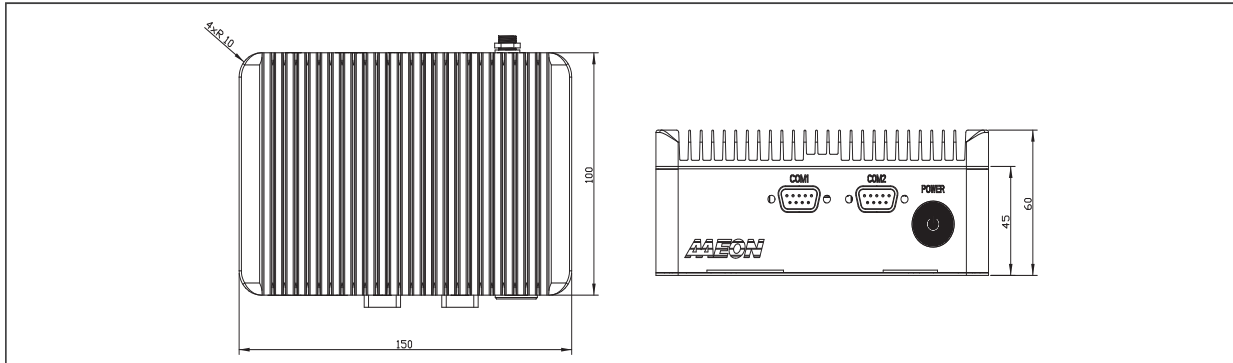

Ordering Information

Part number	CPU	Memory	FAN/ FANLESS	Display	Storage	LAN	USB	RS- 232/422/485	Expansion slot	Power	Operating Temp	Others
PICO-WHU4-SEMI-A11-S001	Celeron 4305UE	DDR4 Socket	Cooler	HDMI x 2	SATAIII x 1 mSATA (Full size) x 1	GbE x 2	USB 3.2 Gen 2 x 2 USB 2.0 x 2	—	M.2 2230 E-key x 1	+12V (ATX)	0~50°C	—
PICO-WHU4-SEMI-A11-S002	i3-8145UE	DDR4 Socket	Cooler	HDMI x 2	SATAIII x 1 mSATA (Full size) x 1	GbE x 2	USB 3.2 Gen 2 x 2 USB 2.0 x 2	—	M.2 2230 E-key x 1	+12V (ATX)	0~50°C	—
PICO-WHU4-SEMI-A11-S003	i5-8365UE	DDR4 Socket	Cooler	HDMI x 2	SATAIII x 1 mSATA (Full size) x 1	GbE x 2	USB 3.2 Gen 2 x 2 USB 2.0 x 2	—	M.2 2230 E-key x 1	+12V (ATX)	0~50°C	—
PICO-WHU4-SEMI-A11-S004	i7-8665UE	DDR4 Socket	Cooler	HDMI x 2	SATAIII x 1 mSATA (Full size) x 1	GbE x 2	USB 3.2 Gen 2 x 2 USB 2.0 x 2	—	M.2 2230 E-key x 1	+12V (ATX)	0~50°C	—
PICO-WHU4-SEMI-A11-S005	i7-8665UE	8GB DDR4 2400Mhz SODIMM	Cooler	HDMI x 2	SATAIII x 1 mSATA (Full size) x 1	GbE x 2	USB 3.2 Gen 2 x 2 USB 2.0 x 2	2	M.2 2230 E-key x 1	+12V (ATX)	0~50°C	—

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660