


# nROK 6222-IMIoT

Intel® Movidius™ AI Edge Vehicle Solution  
with Intel Atom® E3950



## Main Features

- Built-in Intel® Movidius™ Myriad™-X mPCIe deep learning accelerator module
- Intel Atom® processor quad core E3950, up to 2.0GHz
- 4 x PoE (802.3af/at, max. 60W)
- Built-in u-blox-M8N GPS
- Three video outputs, one VGA and two HDMI
- EN50155 conformity
- 3 x mini-PCIe socket expansion
- Dual external storage (compatible with 15mm disk)
- 1 x USB DOM to run OS
- 1 x SD card for exporting and backing up data
- Optional power isolation kit support

## Product Overview

nROK 6222-IMIoT, based on Intel Atom® quad core processor E3950 (up to 2.0GHz), is specifically comply with stringent EN50155 standard in rugged, fanless and compact mechanism. nROK 6222-IMIoT provides complete communication capability between train and computer with build-in CAN BUS 2.0B interface. Equipped with intelligent power management, nROK 6222-IMIoT can be waked on by ignition, RTC timer or SMS message remotely. nROK 6222-IMIoT supports 4 x 802.3at/3af (Max. 60W) PoE ports to connect with IP cameras. The design of 2.5" removable SSD and SD memory card helps to access storage easily. nROK 6222-IMIoT keeps the flexibility to meet the demand for video surveillance in train application. Moreover, nROK 6222-IMIoT is protected against sudden power surges through an attachable VTK6222-PK power isolation kit.

## Specifications

### CPU

- Intel Atom® processor quad core E3950, up to 2.0GHz, 12W, 4 core

### Memory

- 1 x 204-pin DDR3L SO-DIMM socket support 1866MHz up to 8GB. default 4GB

### Myriad-X mPCIe Deep Learning Accelerator Module

- 1 or 2 Myriad™ X MA2485 VPU
- Per VPU with
  - Up to 1 TOPS
  - 16 programmable 128-bit VLIW vector processors
  - CPUs 2 x LEON 4 cores (RISC; SPARC V8)
  - On-chip accelerators 20+ image/vision processing accelerator
  - Neural compute engine (DNN accelerator)
  - Neural network capability neural compute engine
- Operating voltage: 3.3V +/- 10 %
- Dimensions: 51mm x 30mm x 2.5 mm

### Video Output

- Chipset Intel® HD graphics 505
- 2 x HDMI 1.4b up to 4096 x 2160 @30Hz
- 1 x VGA up to 1920 x 1200 @60Hz
- Google Edge TPU (Coral ML Accelerator Card)

### Storage

- 2 x 2.5" SATA 3.0 external SSD (compatible with 15mm drive)
- 1 x SD memory card 3.0 (externally accessible)

- 1x USB EDC for USB DOM

### Expansion

- 1 x Full size mini-PCIe socket (USB 2.0), BOM optional M.2 Key B (USB2.0 + USB 3.0) with 2 x external SIM
- 1 x Full size mini-PCIe socket (USB 2.0 + PCIe 2.0)
- 1 x Half size mini-PCIe socket (USB 2.0 + PCIe 2.0)

### GNSS and On Board Sensor

- 1 x Default U-blox NEO-M8N GNSS for GPS/Glonass/QZSS/Galileo/Beidou
- G Sensor (3-axis, 10-bit resolution)
- TPM 2.0 (optional)

### LAN and Power over Ethernet


- 4-Port LAN, 10/100/1000 Mbps I210-IT GbE, PoE 802.3af/at, max. 60W
- 1-Port LAN, 10/100/1000 Mbps I210-IT GbE

### I/O Interface-Front

- 12 x LED indicators (including 3 x programmable LED)
- 2 x externally accessible SIM card socket with cover
- 2 x 2.5" removable SSD tray
- 1 x externally accessible SD card socket with cover
- 1 x reset button
- 1 x power button
- 1 x USB 3.0 type A (5V/0.9A)
- 2 x HDMI 1.4b
- 1 x M8 (6-pin) for 1 x Mic-in (mono), 1 x Line-out (Stereo)
- 2 x SMA antenna



www.nexcom.com

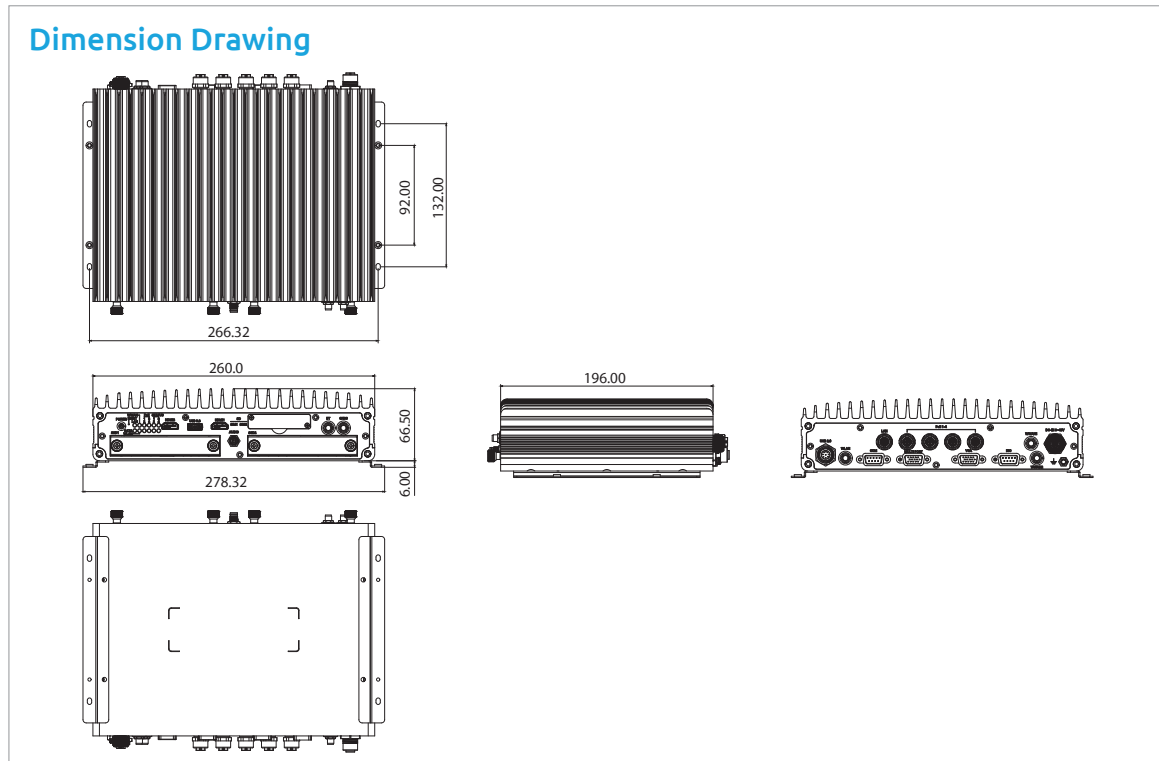

**I/O Interface-Rear**

- 1 x M12 (5-pin) DC input with ignition
  - 24 / 36 VDC (9~48V), non-isolation
- 1 x M12 X-coded LAN port, 10/100/1000 Mbps
- 4 x M12 X-coded PoE 802.3af/at (max. 60W)
- 1 x VGA
- 1 x M12 with two USB 2.0
- 1 x DB9 Full RS-232 (isolation)
- 3 x SMA antenna
- 1 x DB15 (DIO)
  - 4 x DI with isolation
  - 4 x DO with isolation
  - Vin, GND For GPIO
- 1 x DB15 (MULTI PORT)
  - 1 x RS422/RS485
  - 1 x RS232 (TX/RX)
  - 1 x CAN 2.0B

**Power Management & Software Support**

- Power input 24/36 VDC w/o isolation
- Selectable boot-up & shut-down voltage for low power protection by software
- Setting 8-level power on/off delay time by software
- Support S3/S4 suspend mode
- 10~255 seconds WDT support, setup by software
- SDK (Windows/Linux) including utility and sample code

**Operating System**

- Windows 10/Linux

**Dimensions**

- 260mm (W) x 196mm (D) x 66.5mm (H)

**Weight**

- 3.4kg

**Environment**

- -20°C~60°C (w/ Google Edge TPU & industrial SSD) with air flow
- Storage temperatures: -40°C to 80°C

- Relative humidity: 10% to 90% (non-condensing)
- Vibration (random)
  - 2g@5~500 Hz (in operation, SSD)
- Vibration (SSD)
  - Operating: MIL-STD-810G, Method 514.6, Category 4, common carrier US highway truck vibration exposure
  - Storage: MIL-STD-810G, Method 514.6, Category 24, minimum integrity test
- Shock (SSD)
  - Operating: MIL-STD-810G, Method 516.6, Procedure I, functional shock=40g
  - Non-operating: MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

**Standards/Certifications**

- CE
- FCC Class A
- EN 50155:2017
  - Ambient temperature EN 50155, class OT4 (-40 ~ 70°C)
  - Shock and vibration IEC 61373 class B
  - Interruptions of voltage supply class S1,S2
  - Supply change over class C1,C2
  - EMC EN 50121-3-2:2016

**Ordering Information**

- **nROK 6222-IMIoT-AC4S (P/N: TBD)**  
Intel Atom® processor E3950 up to 2.0GHz CPU, 4GB DDR3L SO-DIMM, Intel® Myriad-X mPCIe deep learning accelerator card, DC input 24/36 VDC w/o isolation, 1 x VGA, 2 x HDMI, 1 x LAN, 4 x PoE, 2 x RS-232, 1 x RS-422/485, 8 x GPIO, 1 x USB 3.0, 2 x USB 2.0
- **VTK6222-APK (P/N: 10VK0622200X0)**  
Attachable power kit for power isolation, DC input 24VDC
- **VTK6222-FPK (P/N: 10VK0622201X0)**  
Attachable power kit for power isolation, DC input 110VDC



We reserve the right to change specifications and product descriptions at any time without prior notice.

Train Computer Last update: 03/18/2020

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660