

eBOX565-500-FL

Fanless Embedded System with Intel® Core™ i5-6300U/i3-6100U & Celeron® 3955U, 2 HDMI, 2 GbE LANs, 4 USB 3.0, 2 COM and 9 to 36 VDC

Features

- Intel® Core™ i5-6300U 2.4 GHz/i3-6100U 2.3 GHz & Celeron® 3955U 2.0 GHz (Skylake ULT SoC)
- 260-pin DDR4-2133 SO-DIMM for up to 16GB of memory
- 9 to 36 VDC wide range input
- Supports 2 HDMI, 2 COM and 4 USB 3.0
- Supports Jumbo Frame (9.5K), WoL, PXE and Teaming
- Ultra-compact enclosure design



Specifications

| | |
|-----------------------|---|
| Standard Color | Silver-black |
| Construction | Aluminum extrusion and heavy-duty steel, IP40 |
| CPU | Intel® Core™ i5-6300U 2.4 GHz/i3-6100U 2.3 GHz & Celeron® 3955U 2.0 GHz (Skylake ULT SoC) |
| System Memory | 1 x 260-pin DDR4-2133 SO-DIMM, up to 16GB |
| Chipset | SoC integrated |
| BIOS | AMI |
| System I/O Outlet | 1 x RS-232/422/485 1 x RS-232 2 x HDMI 2 x 10/100/1000 Mbps Ethernet (Intel® i210-AT, i219-LM) 4 x USB 3.0 2 x SMA-type antenna connector 1 x AT/ATX quick switch 1 x ATX power switch 1 x Reset button 1 x Phoenix type VDC power input connector |
| Watchdog Timer | 255 levels, 1 to 255 sec. |
| Storage | 1 x 2.5" SATA HDD drive bay (max. up 9.5 mm height) 1 x mSATA (enabled in BIOS setting) |
| Expansion Interface | 1 x Full-size PCI Express Mini Card slot (USB + PCI Express signal) |
| TPM | N/A |
| System Indicator | 1 x green LED for system power-on 1 x orange LED for HDD active |
| Power Input | 9 to 36 VDC |
| Operating Temperature | -10°C to +50°C (+14°F to +122°F) (with W.T. SSD) |
| Humidity | 10% to 95%, non-condensing |
| Vibration Endurance | 3 Grms with SSD™ (5 to 500Hz, X, Y, Z directions) |
| Dimensions | 141.6 mm (5.57") (W) x 106 (4.17") mm (D) x 73 mm (2.87") (H) |
| Weight (net/gross) | 1.074 kg (1.76lb)/1.67 kg (3.68lb) |
| Certifications | CE |
| EOS Support | Win 10 IoT, WEBS, Linux |


* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Packing List

DC Version

- 1 x Quick manual
- 1 x Driver CD
- 1 x Screws pack
- 4 x Pre-installed foot pad
- 1 x 2-pin terminal block connector

* All specifications and photos are subject to change without notice. www.axiomtek.com © 2019 Axiomtek Co., Ltd. All rights reserved.

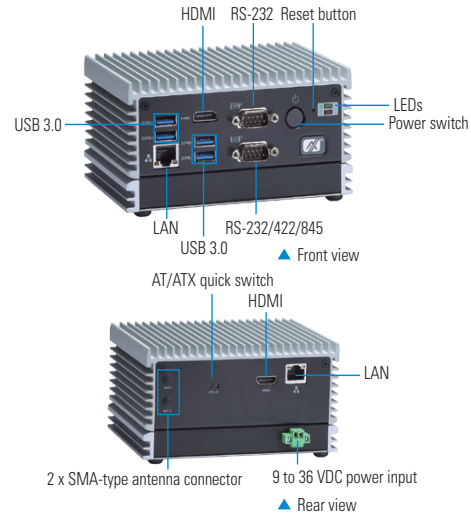

Power Protection

- OVP (over voltage protection)
- OCP (over current protection)
- SCP (short circuit protection)
- Reverse protection

Ordering Information

Standard


| | |
|-------------------------|--|
| eBOX565-500-FL-DC-6300U | Fanless embedded system with Intel® Core™ i5-6300U, 2 HDMI, 2 GbE LANs, 4 USB 3.0, 2 COM, PCI Express Mini Card slot and 9 to 36 VDC |
| eBOX565-500-FL-DC-6100U | Fanless embedded system with Intel® Core™ i3-6100U, 2 HDMI, 2 GbE LANs, 4 USB 3.0, 2 COM, PCI Express Mini Card slot and 9 to 36 VDC |
| eBOX565-500-FL-DC-3955U | Fanless embedded system with Intel® Celeron® 3955U, 2 HDMI, 2 GbE LANs, 4 USB 3.0, 2 COM, PCI Express Mini Card slot and 9 to 36 VDC |

Optional

| | |
|---------------|------------------|
| 2.5" SATA HDD | 64GB or above |
| 2.5" SATA SSD | 100GB or above |
| DDR4 SO-DIMM | 2GB to 16GB |
| 826K5601050E | Wall mount kit |
| 8816K560AA0E | VESA arm kit |
| 8816K560BA0E | DIN-rail kit |
| 50906D24000E | 24V 120W adapter |
| 8816K5603A0E | Wi-Fi module |

* Specifications and certifications may vary based on different requirements.

Dimensions

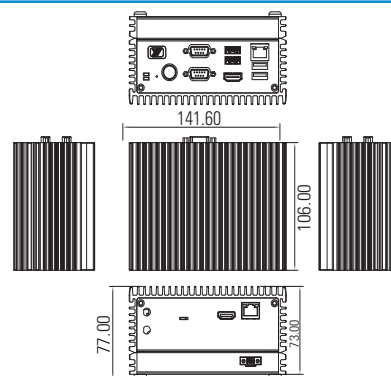

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660