

W24L100-65A2

23.8" IP65 Stainless Resistive Chassis Display



KEY FEATURES

- 23.8", 1920 x 1080
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



SPECIFICATIONS

| Display | | | |
|----------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Resolution | 1920x1080 | Size | 23.8 inches |
| Contrast Ratio | 3000:1 | Panel Brightness | 250.0 nits |
| Display Color | 16.7M Colors | View Angles | 89,89,89,89 |
| Active Area | 527.04x296.46 mm | Touch / Glass | Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional) |
| Mechanical | | | |
| Dimension | 600 x 380 x 60.9 mm | Weight | 12.5Kg |
| Mounting | VESA Mount Yoke Mount | Enclosure | Stainless Housing |
| Cooling System | Fanless design | | |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 45°C |
| Storage Temperature | -20°C to 60°C | IP rating | IP65 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| Power Input | 1 x M12 waterproof connector for 12V DC | USB Port | 1x M12 waterproof connector for touch screen control (Optional) |
| Serial Port | 1 x M12 waterproof connector for touch screen control (Optional) | Video | 1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional) |
| Indicator | 1 x LED Indicator for power 1 x LED Indicator for status | | |
| Control | | | |
| Button | 1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button | | |
| Accessory | | | |


Accessory 100~240V AC to DC Adapter with waterproof connector
Power Cord
External VGA cable with waterproof connector
Waterproof caps
Manual
VESA screws

Optional Accessory Yoke mount stand (Optional)
External HDMI cable with waterproof connector (Optional)
External DVI cable with waterproof connector (Optional)
External USB cable with waterproof connector for touchscreen control (Optional)
External RS232 cable with waterproof connector for touchscreen control (Optional)

Power

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM

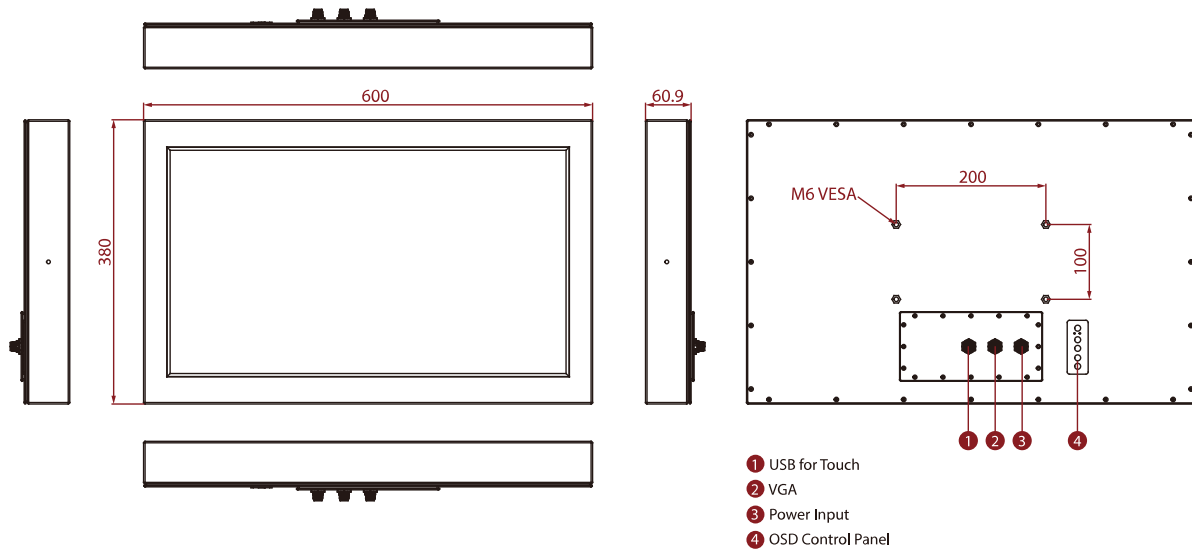

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660