

# R15L100-67C3-P(HB)

## 15" G-WIN IP67 Series P-CAP Display



### KEY FEATURES

- High Quality 15" Panel, 1024 x 768 resolution, 300 nits (Optional for 1000 nits)
- P-cap multi touch screen Optical Bonding with Panel to increase the clarity and transparency
- Dust/ Water proof design with VESA mount Full IP67 Monitor
- Aluminum Die-Casting Housing with Anti-Corrosion Treatments
- Build in ambient Light sensor
- 10 to 55°C wide operating temperature
- Wide Range 9 to 36V DC Input with isolation. Optional for Ignition On/Off delay



### SPECIFICATIONS

Display			
<b>Resolution</b>	1024x768	<b>Size</b>	15.0 inches
<b>Contrast Ratio</b>	2000:1	<b>Panel Brightness</b>	300.0 nits
<b>Display Color</b>	16.2M Colors	<b>View Angles</b>	88,88,88,88
<b>Active Area</b>	304.1x228.1 mm	<b>Optional function</b>	High brightness Panel for sunlight readable (Optional)
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen Bonding With Panel		
Mechanical			
<b>Dimension</b>	379.4 x 278.4 x 58 mm	<b>Weight</b>	3.8 kg
<b>Mounting</b>	VESA Mount	<b>Enclosure</b>	Aluminum Housing Pre finish: Surtec 650, Type II, Class 3 Coating: Polyester powder coating
<b>Cooling System</b>	Fanless design		
Environment			
<b>Operating Humidity</b>	10% to 90% RH, Non-Condensing	<b>Operating Temperature</b>	-10°C to 55°C -40°C to 70°C (with intelligent heater)
<b>Storage Temperature</b>	-30°C to 70°C	<b>Shock</b>	MIL-STD-810G Method 516.6 Procedure I
<b>Vibration</b>	MIL-STD-810G Method 514.6 Procedure I	<b>IP rating</b>	IP67
Certification			
<b>Certification</b>	CE, FCC		
IO Ports			
<b>Power Input</b>	1 x M12 waterproof connector for 9~36V DC	<b>USB Port</b>	1x M12 type connector for Touchscreen via USB signal (Optional)
<b>Serial Port</b>	1 x M12 type connector for Touchscreen via RS232 signal (Optional)	<b>Video</b>	1x M12 type connector for VGA input 1x Waterproof connector for HDMI input 1x Waterproof connector for DVI input (Optional)
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for lock/unlock status		
Control			
<b>Button</b>	1 x "Power" key to power on the device.		

- 1 x "+" key to increase screen brightness.
- 1 x "-" key to decrease screen brightness.
- 1 x "Menu" key can Automatically or manually adjusts brightness of the display screen
- 1 x Day / Night Mode button
- 1 x LED indicator brightness adjustment button
- 1 x Ambient Light sensor


**Accessory**

**Accessory** External open wire Power cable with waterproof connector  
External USB cable with waterproof connector for Touch  
External VGA cable with waterproof connector  
External HDMI cable with waterproof connector  
Waterproof caps  
VESA screws

**Optional Accessory** 100~240V AC to DC 50W Adapter with power cord (Optional)  
External COM cable with waterproof connector for Resistive Touch (Optional)  
External DVI cable with waterproof connector (Optional)

**System Specification**

**DIMENSIONS** UNIT:MM

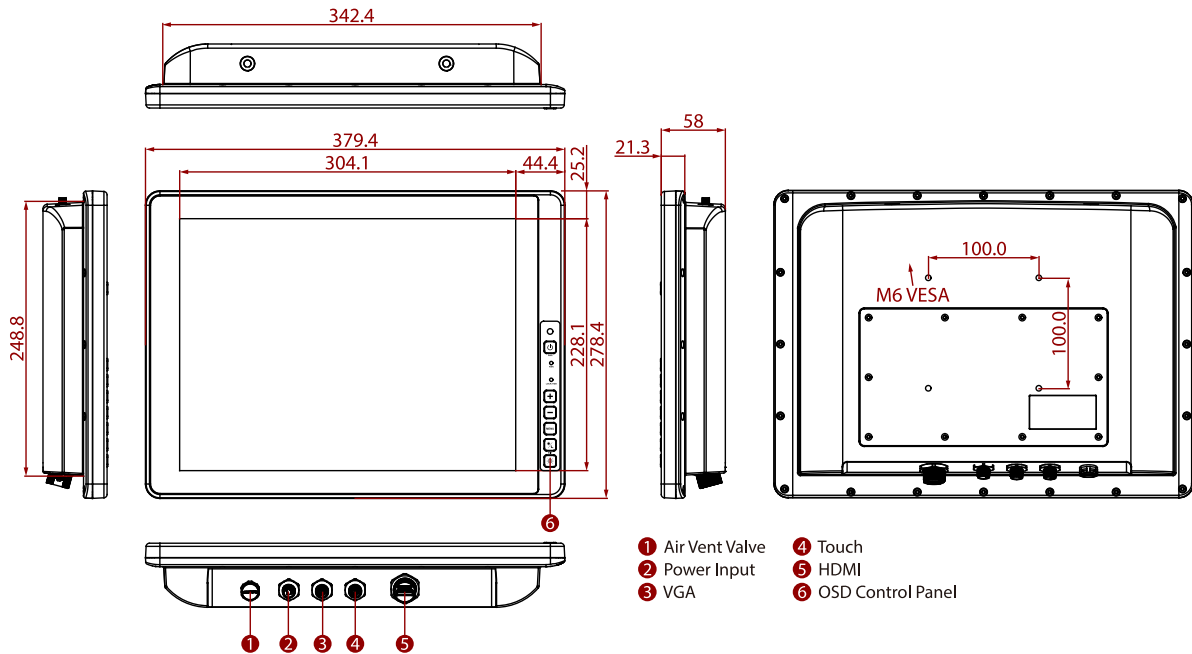

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660