

NISE 3900E

8th/9th Generation Intel® Core™ i7/i5/i3 LGA
Fanless System with Expansion



Main Features

- Support 8th/9th Generation Intel® Core™ i7/i5/i3 LGA socket type embedded processor
- Intel® Q370 PCH
- Support 1 x 2.5" SATA HDD
- 1 x DVI-D, 1 x DP, and 1 x HDMI with independent display support
- Three Intel® GbE LAN ports; support WoL, teaming and PXE
- 1 x External M.2 socket and 1 x SIM card socket
- 6 x USB 3.1 Gen 1, 4 x USB 2.0
- 2 x RS232/422/485 with auto flow control & 2 x RS232
- 1 x Internal mini-PCIe socket support optional Wi-Fi/3.5G/4G LTE
- Support +9V to 30VDC input; ATX power mode
- One PCIe x4 expansion

Product Overview

Integrated with 8th & 9th Generation Intel® Core™ i7/i5/i3 processors, NISE 3900 series is the fanless PC designed for industrial applications which demand high CPU and graphics performance. NISE 3900 series supports up to 16G DDR4 memory and have several options on storage devices like M.2, HDD or SSD. NISE 3900 series supports wide range of DC input from +9V to 30V DC input, and can be operated in an extended operating temperature range between -5 to 55 Celsius degree. For extended module availability, NISE 3900 series also designed one internal mini-PCIe sockets to support IoT wireless connectivity applications (support optional Wi-Fi, 3.5G, 4G LTE modules).

Specifications

CPU Support

- Support 8th & 9th Generation Intel® Core™ i7/i5/i3 LGA socket type embedded processor
 - Intel® Core™ i7-9700TE, 8 Core, 1.8GHz, 12M Cache
 - Intel® Core™ i5-9500TE, 6 Core, 2.2GHz, 9M Cache
 - Intel® Core™ i3-9100TE, 4 Core, 2.2GHz, 6M Cache
 - Intel® Core™ i7-8700T, 6 Core, 2.4GHz, 12M Cache
 - Intel® Core™ i5-8500T, 6 Core, 2.1GHz, 9M Cache
 - Intel® Core™ i3-8100T, 4 Core, 3.1GHz, 6M Cache
- Turbo-boost disabled by default

Main Memory

- 2 x DDR4 2400/2666 SO-DIMM socket, support up to 32GB

Display Option

- Three independent display
 - HDMI + DP+ DVI-D
- Dual independent display
 - HDMI + DP
 - HDMI + DVI-D
 - DP + DVI-D

Front I/O Interface Status LEDs

- 3 x LAN active LEDs
- 2 x GPO status/COM1/2 TX/RX LEDs
- 1 x HDD access LEDs
- 1 x Battery low

- 1 x M.2

Front I/O Interface

- 1 x ATX power on/off switch
- 1 x DP
- 1 x Line-out and 1 x Mic-in
- 2 x Antenna holes
- 1 x External M.2 socket (M-Key)
- 1 x SIM card holder
- 4 x USB 2.0 ports (500mA per each)

Rear I/O Interface

- 4 x DB9 for COM1 to COM4
 - COM1/2: RS232/422/485 auto flow control
 - COM3/4: RS232
- 6 x USB 3.1 ports (900mA per each)
- 1 x DVI-D port
- 1 x HDMI port
- 2 x Intel® I210-IT GbE LAN ports; support WoL, teaming and PXE
- 1 x Intel® I219-LM GbE LAN port
- 1 x 3-pin remote power on/off switch
- +9V to 30V DC input


Internal I/O

- 8CH GPIO: internal pin header, supports 4 x GPO and 4 x GPI, TTL 5V level
- Onboard TPM2.0 (SLB9665) for data encryption purposes

www.nexcom.com



Dimension Drawing

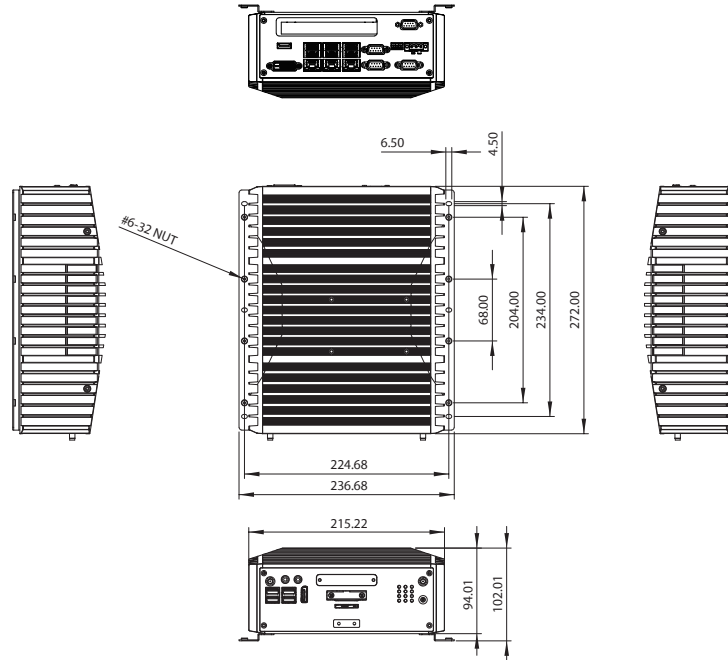

- 1 x Internal M.2 (B-key), supports optional LTE

Storage Device

- 1 x External M.2 socket (M-Key SATA 3.0, PCIe x4)
- 1 x 2.5" HDD or SSD (SATA 3.0) driver bay

Expansion Slot

- One PCIe x4 expansion slot
 - Add-on card length: 169mm max.
 - Power consumption: 10W/slot max.
- 1 x Internal mini-PCIe socket support optional Wi-Fi/3.5G/4G LTE

Power Requirements

- AT/ATX power mode (default: ATX power mode)
- Power input: +9 to +30V DC
- Power adapter: optional AC to DC power adapter (24V DC, 120W)

Dimensions

- 215 mm(W) x 272mm (D) x 94mm (H) without wall mount bracket (8.5" x 10.7" x 3.7")

Construction

- Aluminum and metal chassis with fanless design

Environment

- Operating temperature: Ambient with air flow: -5°C to 55° (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 95% (non-condensing)
- Shock protection:
 - HDD: 20G, half sine, 11ms, IEC60068-2-27
 - M.2: 50G, half sine, 11ms, IEC60068-2-27

- Vibration protection with HDD condition:
 - Random: 0.5Grms @ 5~500 Hz, IEC60068-2-64
 - Sinusoidal: 0.5Grms @ 5~500 Hz, IEC60068-2-6
- Vibration protection with SSD & M.2 condition:
 - Random: 2Grms @ 5~500 Hz, IEC60068-2-64
 - Sinusoidal: 2Grms @ 5~500 Hz, IEC60068-2-6

Certifications

- CE approval- EN61000-6-2- EN61000-6-4
- FCC Class A

OS Support Lists

- Windows 10 64-bit
- Linux Kernel 4.9

Weight Information

- Gross weight: 6.54kg
- Net weight: 5kg

Ordering Information

- **NISE 3900E System (P/N: 10J0039000X0)**
8th/9th Generation Intel® Core™ i7/i5/i3 fanless system with one PCIe x4 expansion
- **24V, 120W AC to DC power adapter w/o power cord (P/N: 7400120023X00)**

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660