

# ZEUS-PURO PROJECT BASED

4U Rackmount Purley Platform Server System, Support Xeon® FPGA CPU

Industrial Server System

Front View



Rear View



## Features

- 4U Rackmount Server System
- Dual Intel® Xeon® Processor Skylake-SP and Cascade Lake –SP processor
- Intel® Communications Chipset C621
- DDR4 2133/2400/2666 MHz DIMM (8 DIMM Per CPU) RDIMM x 16, Up to 512 GB
- IPMI Support
- Up to 32 Gigabit Ethernet Ports Via NIM (Project Base Up to 32 Gigabit Ethernet Ports Via NIM)
- 6 x 3.5" SATA HDD or 2.5" SATA HDD x 6, M.2 2260 Socket x 1
- Option Rear Side PCIe [x4] x 4 (or PCIe [x8] x 2) + PCIe [x8] x 2 (Or PCIe [x16] x 1)
- Option Front PCIe [x16] x 2
- Optional Parallel LCM with Keypad x 1
- RJ-45 Console x 1, USB 3.0 x 2, 1 GbE LAN x 2
- 800~1600W CRPS Redundant Power



System Fan	5
Front I/O Panel	Power LED x 1, Status LED x 1, HDD Active LED x 1
Rear I/O Panel	AC Power Input x 1, Power Switch x 1, VGA port (Optional), Rear Expansion Slot (Option)
Color	Black
Power Supply	800 ~1600W Redundant PSU
Dimension	(480mm x 600mm x 176mm)
Power Consumption	TBD
MTBF (Hours)	TBD
<b>Display</b>	
Chipset	AST2500
Graphic Engine	From IPMI or Mini PCIE Option
Resolution	—
Connector	VGA Option
<b>I/O</b>	
Serial Port	RJ-45 Console x 1
K/B and Mouse	N/A
USB	USB 3.0 x 2
<b>Environmental</b>	
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10% ~ 80% relative humidity, non-condensing
Storage Humidity	10% ~ 80% @40°C; non-condensing
Vibration	0.5 g rms/ 5 ~ 500Hz / operation (2.5" Hard Disk Drive) 1.5 g rms/ 5 ~ 500Hz / non operation
Shock	10 G peak acceleration (11 m sec. duration), operation 20 G peak acceleration (11 m sec. duration), non operation

## Specifications


System	
Form Factor	4U Rackmount Server System
Processor	Intel® Xeon® Skylake-SP and Cascade Lake-SP Processors
System Memory	DDR4 2133/2400/2666 R-DIMM, Up to 512 GB
Chipset	Intel® C621
Ethernet	Intel® i211 Gigabit Ethernet x 2
BIOS	AMI BIOS
Serial ATA	SATA II port x 6
Storage	2.5" HDD x 6 or 3.5" HDD x 6, M.2 x 1
Expansion Interface	NIM slot x 4 (Project Base NIM Slot x 8) Option front PCIe [x16] slots x 2 Option rear side PCIe [x4] x 4 (or PCIe [x8] x 2) + PCIe [x8] x 2 (Or PCIe [x16] x 1) M.2 Slot x 1 Mini PCIe x 1
Watchdog Timer	1~255 steps by software programmable
RTC	Internal RTC

# ZEUS-PURO

04

Industrial Server System

**Dimension** Unit: mm

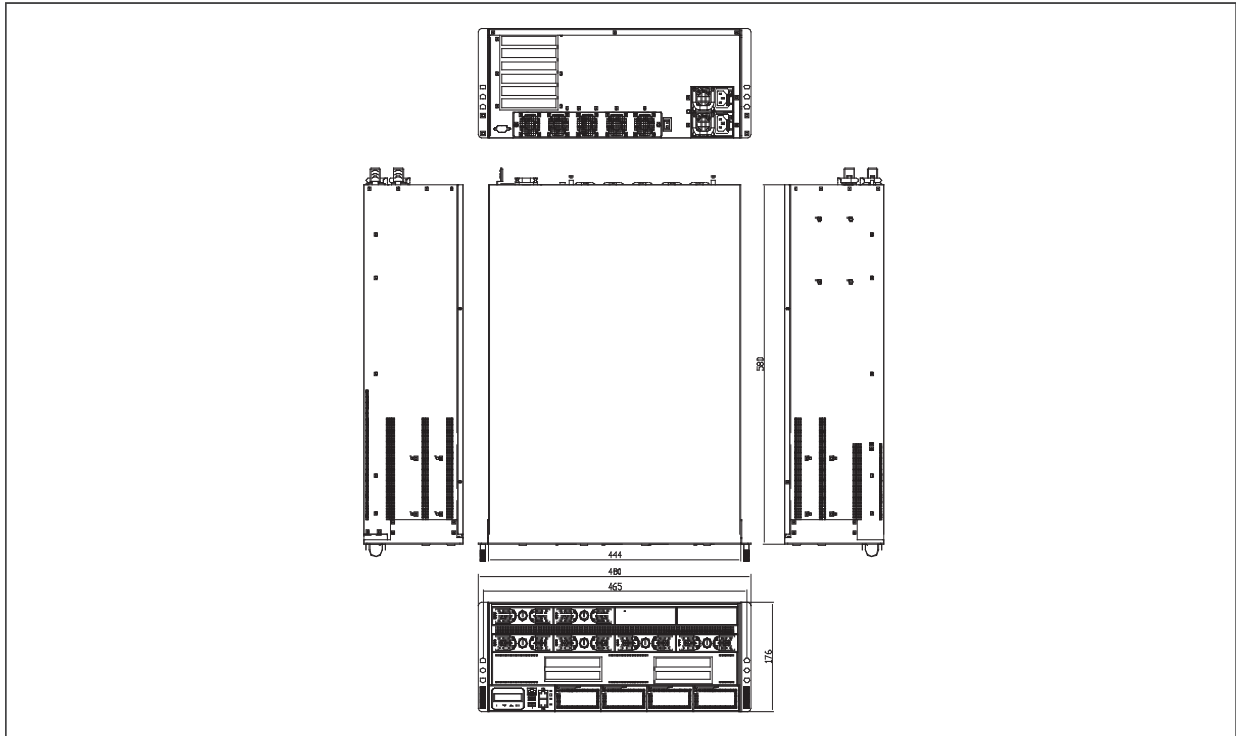

## Ordering Information

- TBD

## Packing List

- ZEUS-PURO

## Optional Accessories

- TBD

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660