


# LPC-P190S-2VE

19" P-cap Panel PC with 7 / 6 Gen Core i7 / i5 / i3 , IP65 / 66 Bezel-Free and Wide Range Power Input

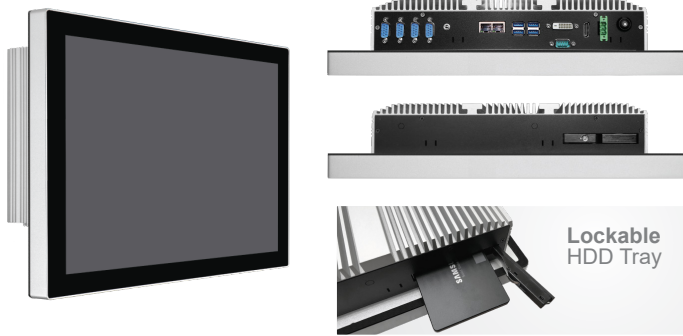

## Features

- ▶ IP65 / 66 Front Panel
- ▶ Bezel-Free Design
- ▶ 19" P-cap Flat Bezel
- ▶ Fanless Design
- ▶ 3-Pin Power Input Terminal Block
- ▶ DC 9~36V Wide Range Power Input
- ▶ 1920\*1080 Resolution
- ▶ 450 nits LED Backlight
- ▶ Optional 1000 nits LED Backlight
- ▶ Lockable HDD Tray

### System

Processor	7th/6th Gen Kaby Lake-U/Skylake-U Core™ i7/i5/i3
System Memory	DDR4 2133 SO-DIMM, up to 32 GB
External I/O Port	4 x USB 3.0 2 x GbE LAN (I210 & I219LM, AMT 11.x supported)
	1 x Display Port 1 x DVI-D 5 x RS-232/422/485 (COM1 default : RS485)
	1 x Audio 1 x Power press button 1 x 3-Pin Power Input 1 x Lockable HDD Tray
Storage	2 x SATA3 (6.0Gb/s) 1 x mSATA (full size mini-PCIe)
Operating System	6th Gen CPU for Win 7 Pro/ WES7 / Win 8 / Win 10 7th Gen CPU for Win 10
Expansion	2 x MiniPCIe Slot (1 x Nano Sim Holder)

### LCD

Display Type	19" TFT LCD
Max. Resolution	1280*1024
Max. Color	16.7M
Luminance	350 nits
View Angle	85/85/80/80
Backlight Lifetime	30,000 hours

### Environment

Operating Temp	-40~80 °C · IEC-60068-2-1/2/14
Storage Temp	-40~80 °C
Humidity	10~90% @40 °C, non-condensing
EMC	FCC / CE Class A Certification CE Class B Compliant
Vibration	1.5 Grms @10~500Hz, IEC-60068-2-64

### Power Requirement

Power Input	3-Pin Power Input Terminal Block DC 9~36V Power Input Input on board fuse / Input reverse / Over current / Output short circuit protection
-------------	--

### Mechanical


Construction	Aluminum Front Bezel and Case
IP Rating	Front Panel IP65 / IP66 Compliant
Mounting	VESA / Panel Mount
Dimension	421 x 350 x 84

### Touch Screen

Type	19" P-cap USB
------	---------------

\* All specifications are subject to change without prior notice.

## Dimension & I/O Connector

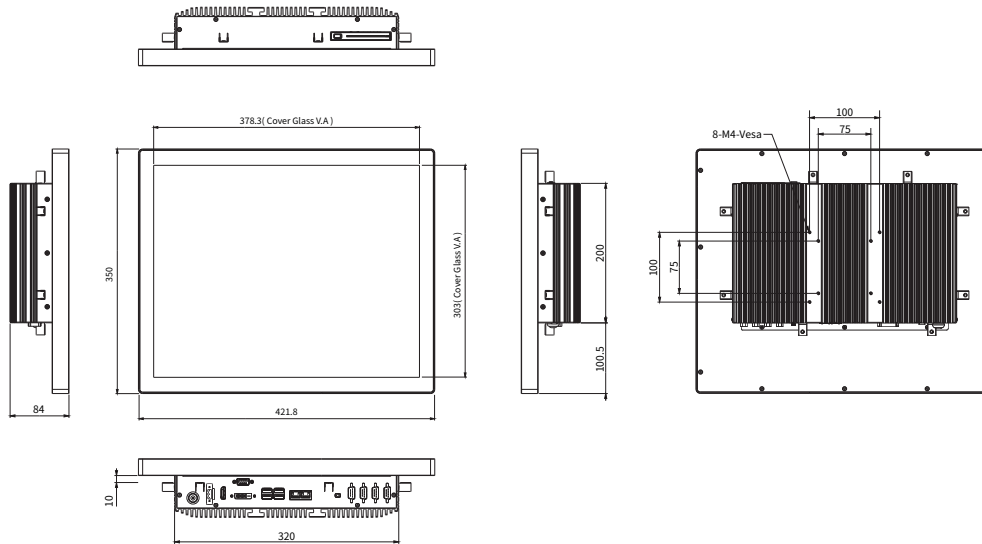

### Ordering Information

LPC-P190S-2VE1	19" P-cap Panel PC with Celeron 3955U, 1920 x 1080 Resolution, 450 nits, DC 9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P190S-2VE2	19" P-cap Panel PC with i3-6100U, 1920 x 1080 Resolution, 450 nits, DC 9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P190S-2VE3	19" P-cap Panel PC with i5-6300U, 1920 x 1080 Resolution, 450 nits, DC 9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P190S-2VE4	19" P-cap Panel PC with i7-6600U, 1920 x 1080 Resolution, 450 nits, DC 9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P190S-2VE5	19" P-cap Panel PC with i7-7600U, 1920 x 1080 Resolution, 450 nits, DC9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A) <b>(Only work with Win 10)</b>
WFK-024	WiFi kits w/ cable & Antenna (2.4GHz, 802.11 b/g/n, 1T1R)
WFK-524	WiFi kits w/ cable & Antenna (2.4 & 5GHz, 802.11 a/b/g/n/ac + BT, 2T2R)
04-US-26-00002	120 W / 24V power adapter with 3 pin terminal block (For High Brightness Model)

### Ordering Code

LPC-P190S-2VE Series | -H / -OB / -G / -AG / -AR / -B / -V / -M

H = High Brightness 1000 nits LED backlight

OB = Optical Bonding

G = Glass without touch

AG = Anti-Glare

AR = Anti-Reflection

V = Vandal Proof Glass (By Project)

M = M12 connector (TBC)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660